


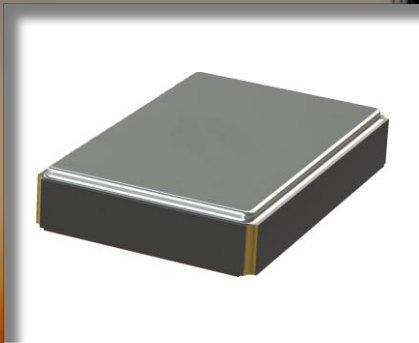

FEATURES

- ✓ Low Phase Noise Performance
- ✓ SMD Construction
- ✓ Tape and Reel Compatibility


Temperature Controlled Crystal Oscillator

#blileytakesyoufurther


Description

Bliley TCVCXO's are capable of meeting Frequency vs. Temperature stabilities which rival traditional "Ovenized Oscillator" Technology. This coupled with design topologies meeting the harshest Mil-Standards makes Bliley TCXO's the choice of many system designers for mobile equipment.

Block Diagram

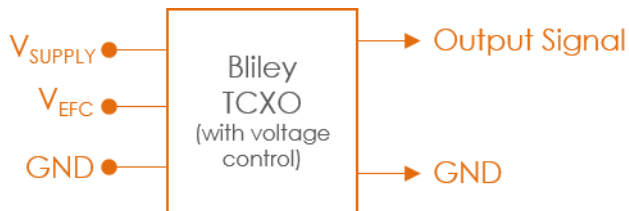

Part Number Configuration

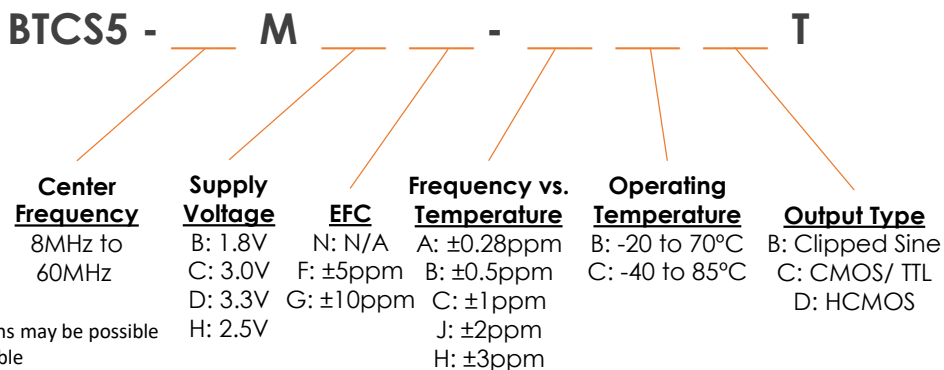

*Not all combinations of options may be possible

**Other options may be available

Performance Specifications

Parameter	Conditions	Values			Unit
		MIN	TYP	MAX	
Frequency Range		8		60	MHz
Initial Frequency Tolerance ¹	Tested at +25°C			±2	ppm
Frequency Stability					
vs. Temperature	See options (max)	±0.28, ±0.5, ±1, ±2, ±3			ppm
vs. Load	10% Change			±0.3	ppm
vs. Supply Voltage	5% Change			±0.3	ppm
Aging					
1 st Year				±1.0	ppm
5 Years				±3	ppm
Supply Voltage (Vdd)	Option B	1.71	1.8	1.89	Vdc
	Option C	2.85	3.0	3.15	Vdc
	Option D	3.13	3.3	3.47	Vdc
	Option H	2.37	2.5	2.63	
Current Consumption			4	7	mA
Start-up Time			5		mSec
Electronic Frequency Control					
Voltage Range		0		Vdd	Vdc
Center Voltage			Vdd/2		Vdc
Frequency Range	See options (min)		±5, ±10		ppm
Slope			positive		
Input Impedance			100		kΩ
Linearity			10		%
Moisture Sensitivity Level	1				

1: Initial tolerance only applicable to parts without EFC/voltage control

Performance Specifications


Parameter	Conditions	Values			Unit
Output Characteristics (CMOS/TTL)		MIN	TYP	MAX	
High Output Level	Logic "1"		90% Vdd		
Low Output Level	Logic "0"				10% Vdd
Rise/Fall Time				10	
Duty Cycle			45	50	55
Load				15	
Output Characteristics (Clipped-Sine)		MIN	TYP	MAX	
Output Level			0.8		
Load	±10%		10 KΩ//10 pf		

Parameter	Conditions	Values			Unit
Phase Noise			TYP		
Phase Noise (10 MHz)	Tested at +25°C				
	10Hz		-85		dBc/Hz
	100Hz		-120		dBc/Hz
	1kHz		-138		dBc/Hz
	10kHz		-142		dBc/Hz
	100kHz		-147		dBc/Hz

Environmental Compliance

Parameter	Conditions	Values			Unit
		MIN	TYP	MAX	
Operating Temperature	Option B	-20		+70	°C
	Option C	-40		+85	°C
Storage Temperature		-55		+125	°C
Solderability	MIL-STD-202 Method 208				
Solvent Resistance	MIL-STD-202 Method 215				
Shock	MIL-STD-202 Method 213 Test Condition I				
Vibration	MIL-STD-202 Method 204 Test Condition C				
Thermal Shock	MIL-STD-202 Method 107 Test Condition B-1				
Seal	MIL-STD-202 Method 112 Test Condition C & D				

Physical Specifications

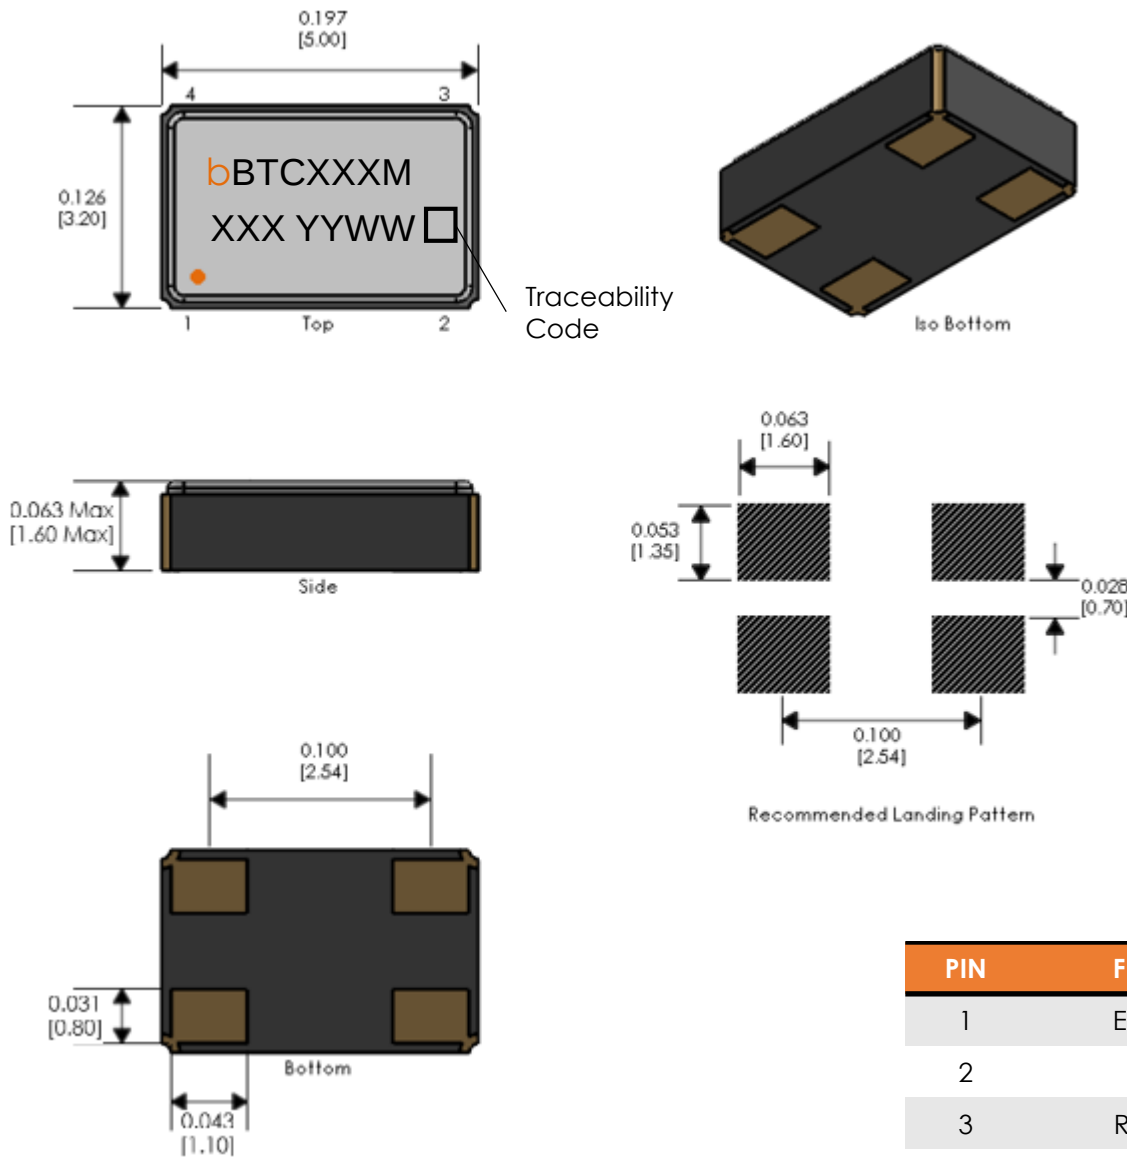

Tolerances (mm) .X = ± 0.5, .XX = ±0.2 unless otherwise specified

PIN	FUNCTION
1	EFC / N.C.
2	Ground
3	RF Output
4	Supply Voltage






Notes:
Connection Pads: Gold(10-40 μ in.) over Nickel (100-250 μ in.)

DISCLAIMER: Bliley Technologies, Inc. reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No intellectual property rights accompany the sale or delivery of any such product(s) or information.

Tape and Reel

Embossed Carrier Dimensions (8mm, 12mm, 16mm, 24mm Tape Only)

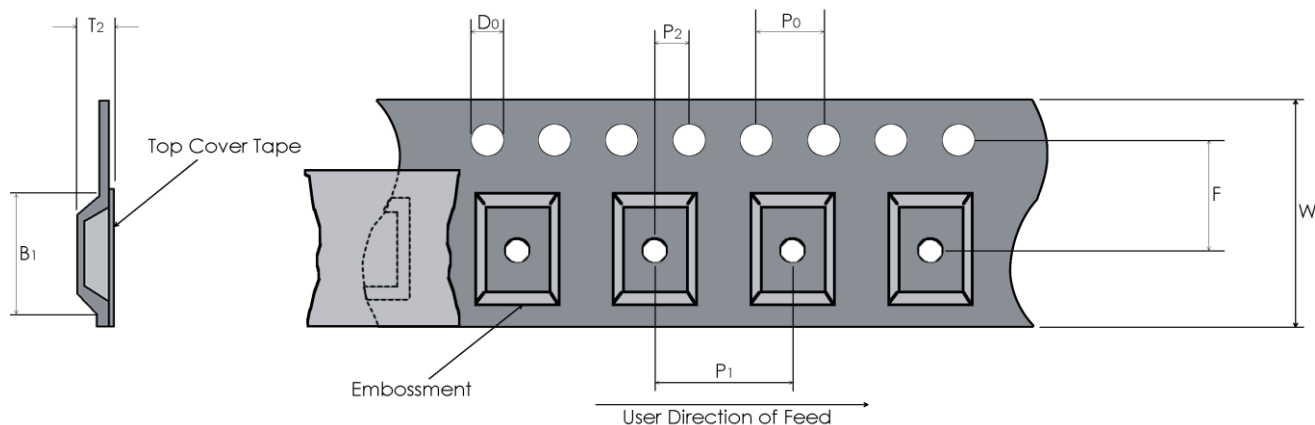

Tape Dimensions (mm)								Reel Dimensions (mm)	
W	F	Do	Po	P1	P2	B1	T2	Outside Dia.	Parts / Reel
12	5.5	1.5	4.0	8	2.0	5.5	1.7	180	1,000

Recommended Reflow Profile

Reflow Profile: in accordance to IPC/JEDEC J-STD-020 (Latest Revision)

Additional Notes:

- This part has been designed for pick and place reflow soldering
- This part may be reflowed once
- This part should not be reflowed in the inverted position

Packaging

Packaging: All packaging must conform to ESD Controls detailed in ANSI/ESD S20.20 (Latest Revision)