

## EM2929 Series EuroMag Terminal Blocks

Hi-Current; 10.16 Centers

### SPECIFICATIONS

**Rating:** 65A, 300V

**Center Spacing:** 0.40" (10.16mm)

**Wire Range:** #6-20 AWG

**Housing Material:** UL rated 94V0 Thermoplastic

**Contact Material:** Tin-Plated Copper

**Cage Material:** Steel, Chromate Plated

**Screw Size:** M4 Stainless Steel

**Operating Temperature:** 105°C (221°F) max., -40°C (-40°F) min.

**Torque Rating:** 15 lb-in.

**Recommended PCB Hole Diameters:** 0.055" (1.40mm)

**Construction:** Mold to length

**Agency Information:**  File E62622; CE Certified




EM292908

### Dimensions - mm

| Poles | L (mm) |
|-------|--------|
| 2     | 20.34  |
| 3     | 30.50  |
| 4     | 40.66  |
| 5     | 50.82  |
| 6     | 60.98  |
| 7     | 71.14  |
| 8     | 81.30  |

To convert to inches, divide by 25.4

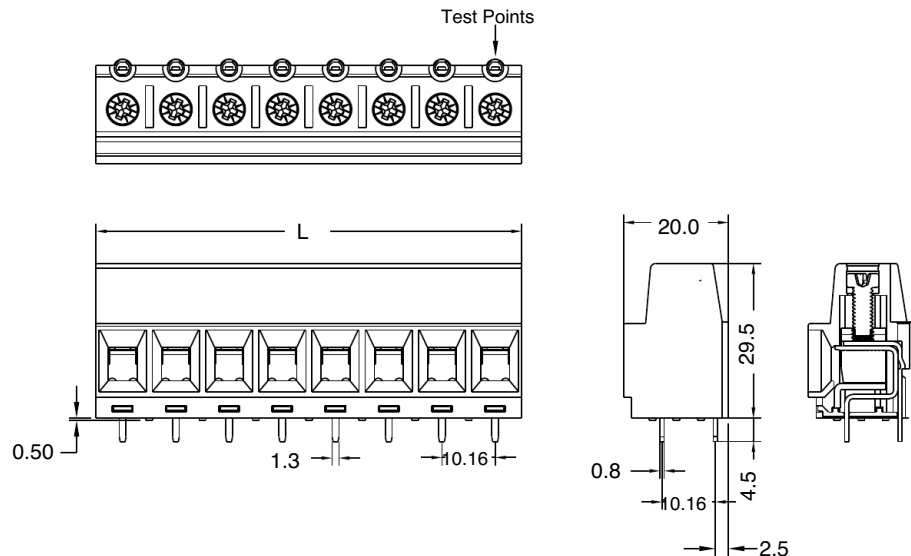

## Part Numbering System

Series

# of Poles

EM2929

□□ - UL

02 to 08