


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/27/18	D.FRISIELLO

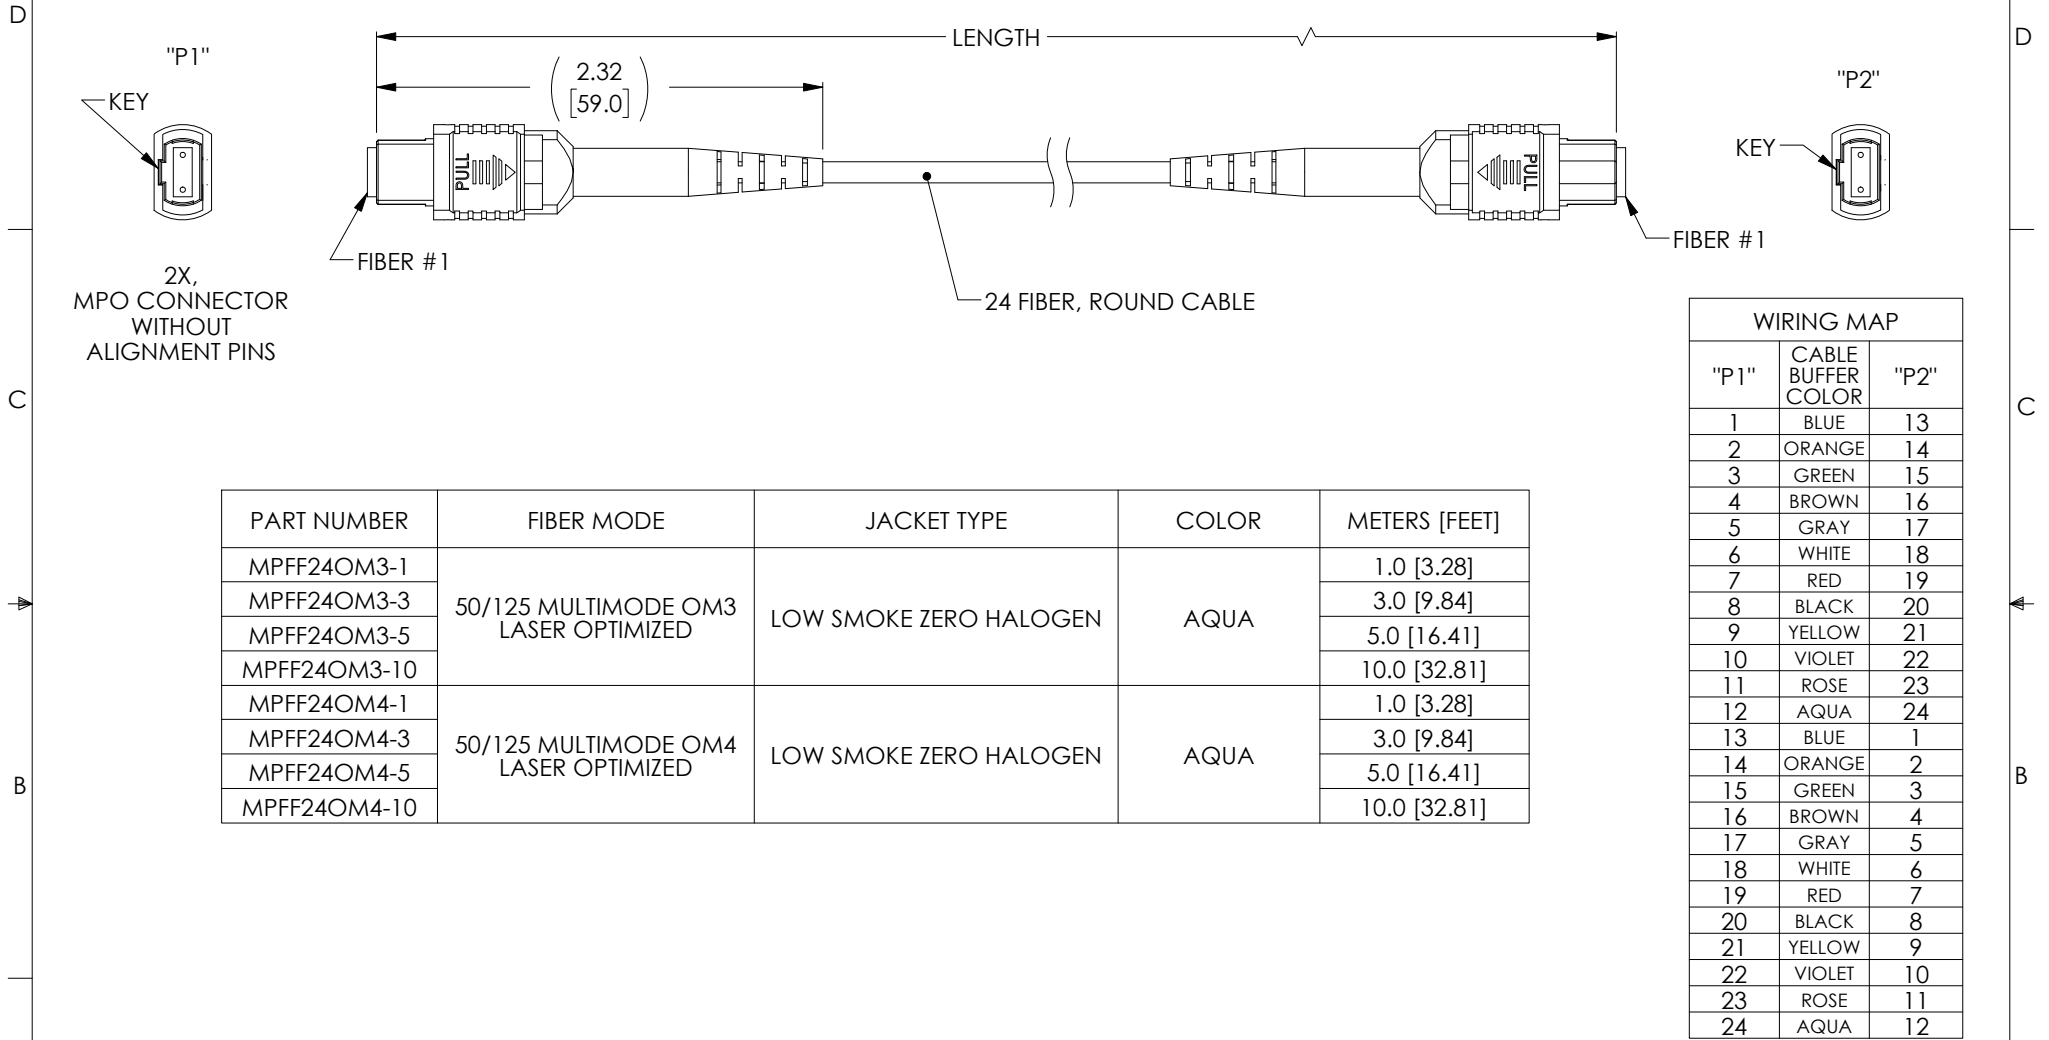

PART NUMBER	FIBER MODE	JACKET TYPE	COLOR	METERS [FEET]
MPFF24OM3-1	50/125 MULTIMODE OM3 LASER OPTIMIZED	LOW SMOKE ZERO HALOGEN	AQUA	1.0 [3.28]
MPFF24OM3-3				3.0 [9.84]
MPFF24OM3-5				5.0 [16.41]
MPFF24OM3-10				10.0 [32.81]
MPFF24OM4-1	50/125 MULTIMODE OM4 LASER OPTIMIZED	LOW SMOKE ZERO HALOGEN	AQUA	1.0 [3.28]
MPFF24OM4-3				3.0 [9.84]
MPFF24OM4-5				5.0 [16.41]
MPFF24OM4-10				10.0 [32.81]

NOTES:

1. MPO CONNECTOR MULTIMODE ASSEMBLY POLISH TYPE: UPC
2. ALL CONNECTORS ACCOMPANIED WITH A DUST CAP INSTALLED (NOT SHOWN).
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: <12 [305] = +1 [25] / -0 >12 [305] <60 [1524] = +2 [51] / -0 >60 [1524] <120 [3048] = +4 [102] / -0 >120 [3048] <300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [13] PROJECTION 	APPROVALS	DATE	 50 HIGH STREET NORTH ANDOVER, MA 01845	
	DRAWN BY G.HUAN	03/15/18		
	CHECKED BY D.FRISIELLO	3/22/18	CATEGORY FIBER OPTICS	
	APPROVED BY D.GUITADAURO	3/27/18	PRODUCT DESCRIPTION 24 Fiber MPF-MPF LSZH AQU	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A	FSCM NO. 43321	DWG. NO. MPFF24
COLOR VARIATIONS MAY OCCUR		SCALE: NONE	CAD FILE: MPFF24.SLDDRW	REV. A
		SHEET 1 OF 1		