
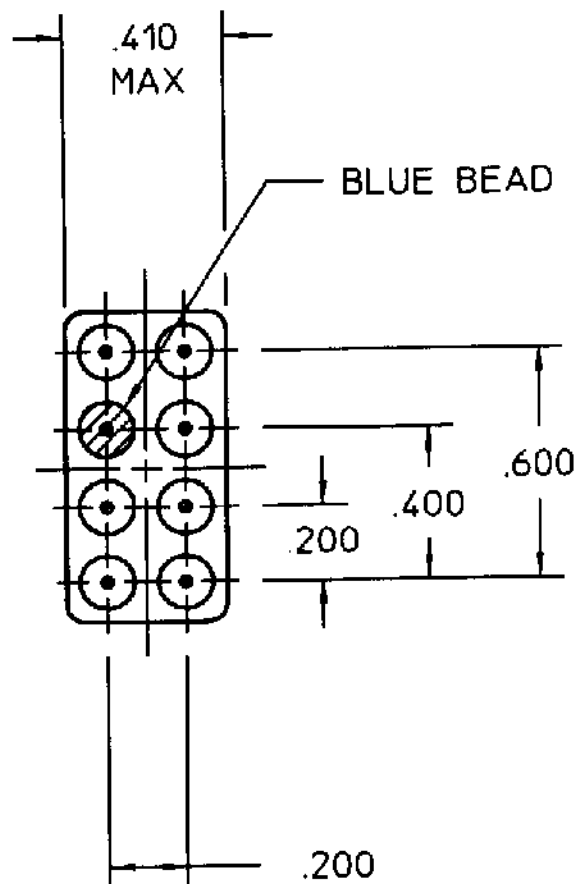


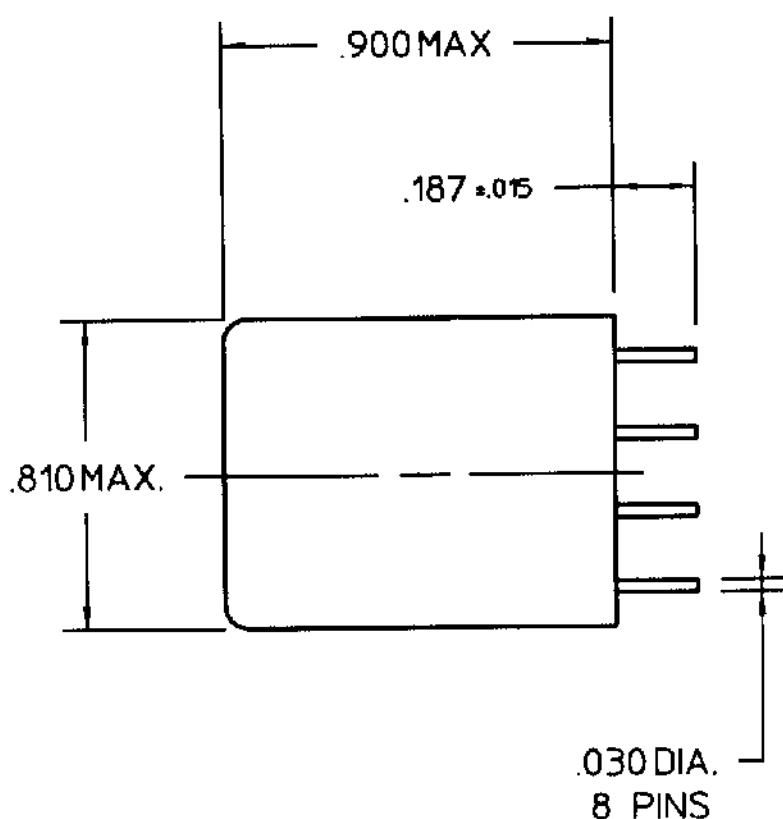

COIL: @ 25°C

RESISTANCE 2500 OHMS ± 10%

NOMINAL VOLTAGE 48.0 VDC

MUST OPERATE 25.0 VDC

MUST RELEASE 2.5 VDC

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 6 MS MAX.

RELEASE 3 MS MAX.

CONTACT BOUNCE 3 MS MAX.

CUSTOMER DATA SHEET

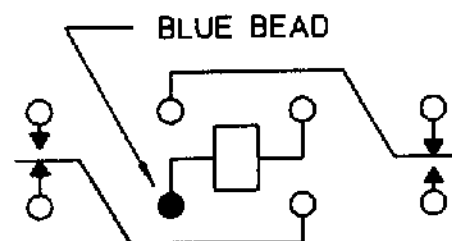

CONTACT RATING: LOW LEVEL TO
2 AMPS 30 VDC RESISTIVE
100,000 OPERATIONS

DR. R.B. 2/28/95 CK2/23/85 JY

COMMUNICATIONS
INSTRUMENTS, INC.

CUST. HI-G
CUST. NO. 2B-2A-148

TYPE "FW" RELAY

FW1201S31