


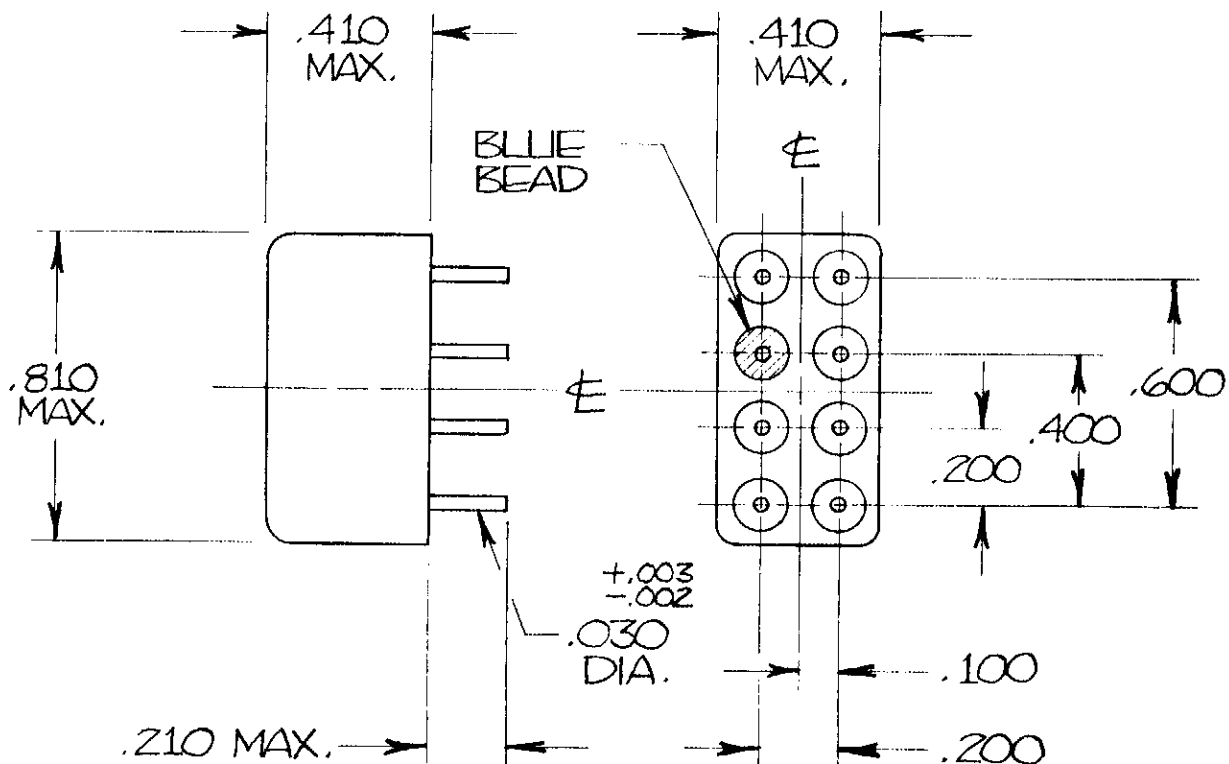

REVISED 8/8/91 JMB

COIL: @ +25°C


RESISTANCE 870 Ω ± 10%

NOMINAL VOLTAGE 24.0 VDC

MUST OPERATE 18.4 VDC

MUST RELEASE —

CUSTOMER DATA SHEET

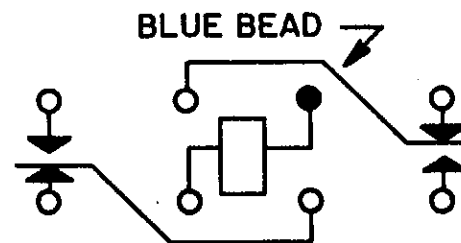

ENVIRONMENT:

VIBRATION — CPS TO — CPS @ — g's

SHOCK — g's — MS. DURATION

TEMPERATURE -45 °C TO +70 °C

NOTES: OPERATE TIME: 5 MS MAX.

RELEASE TIME: 3 MS MAX.

DIELECTRIC 500 VAC ALL POINTS

CONTACT RATING: .3 TO 2 AMPS
28 VDC 100,000 OPERATIONS

DR. R.B. 6-14-91

CK. G/14/91 JMB



Communications
Instruments, Inc.

CUST. P & B

CUST. NO. HPS-11D-24

TYPE "HFW" RELAY

HFW1201S180