


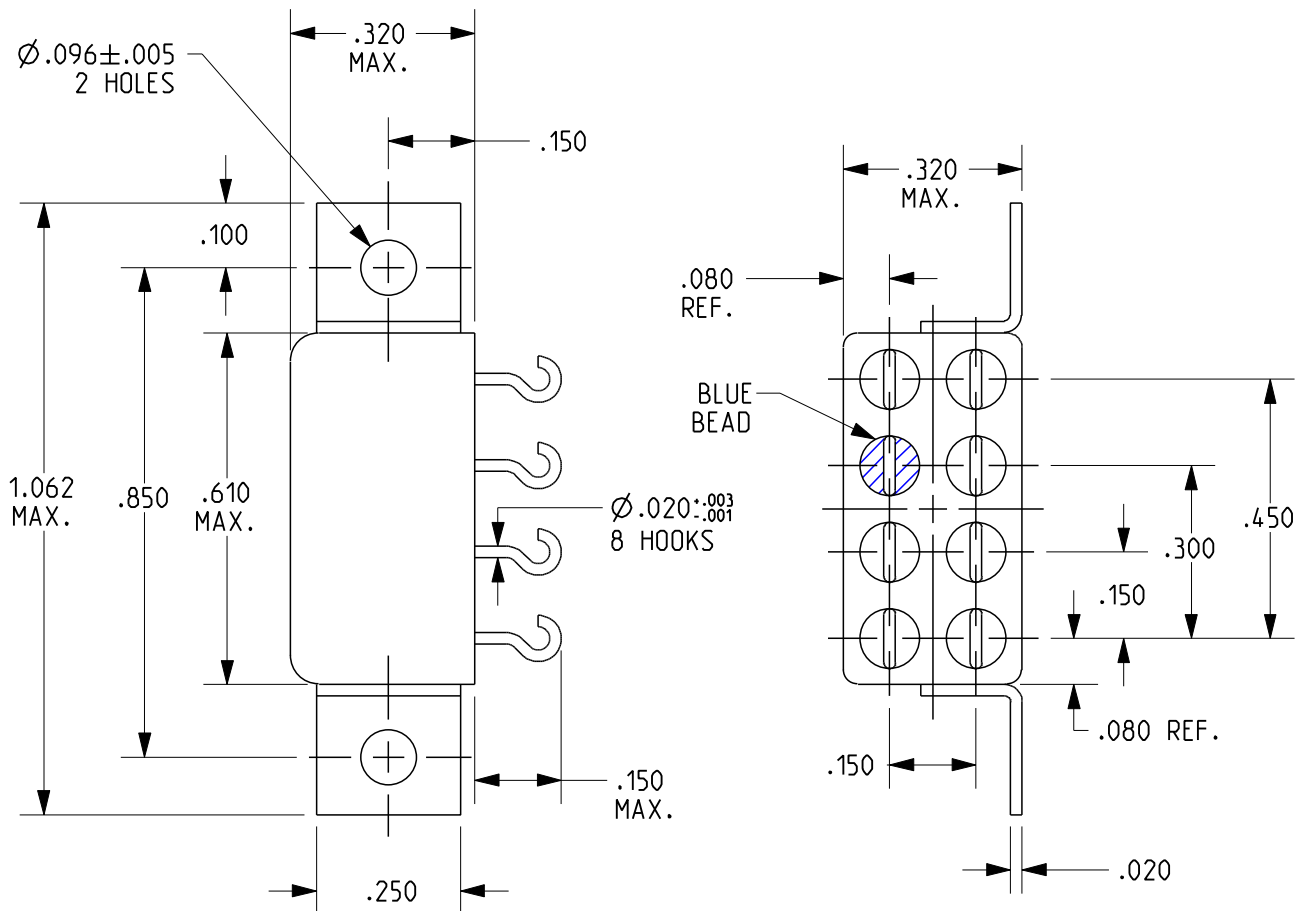

REV. B


DCO 131316

TOL. = $\pm .010$

COIL: @ 25°C	
RESISTANCE	1350 OHMS $\pm 10\%$
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	14.5 VDC
MUST RELEASE	8.7 VDC MAX., 1.6 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 Hz TO 3000 Hz @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES:	OPERATE 4 MS MAX. RELEASE 6 MS MAX. CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET

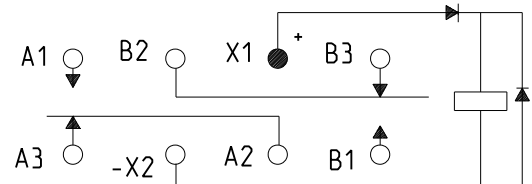

TERMINAL VIEW

CONTACT RATING:	LOW LEVEL TO
	2 AMPS 28 VDC RESISTIVE
	50,000 OPERATIONS

DR. B.D. 26MAR2007 CK. J.M.B. 9/28/10

Tyco Electronics ©COPYRIGHT 2005
TYCO ELECTRONICS CORPORATION
ALL INTERNATIONAL RIGHTS RESERVED

CUST. QPL
CUST. NO. M39016/38-023L REV. _____

TE NUMBER
1-1617515-8

CII PART NUMBER
3SBC1683A2