
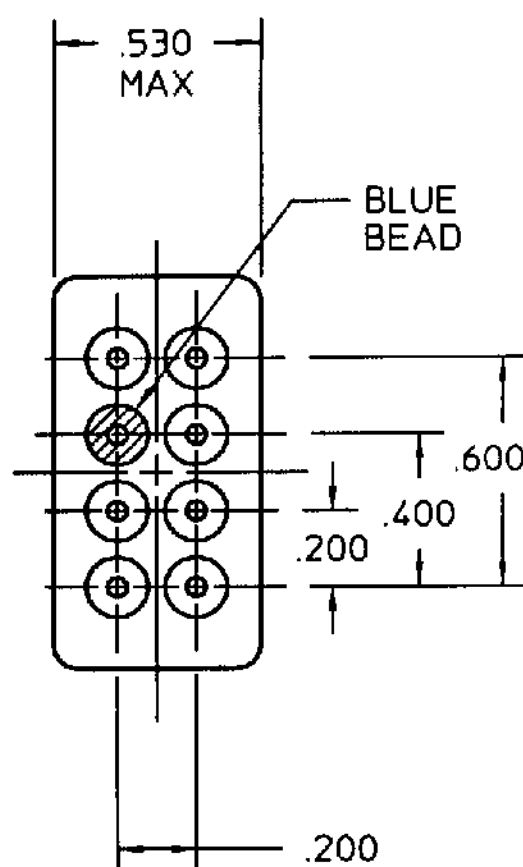


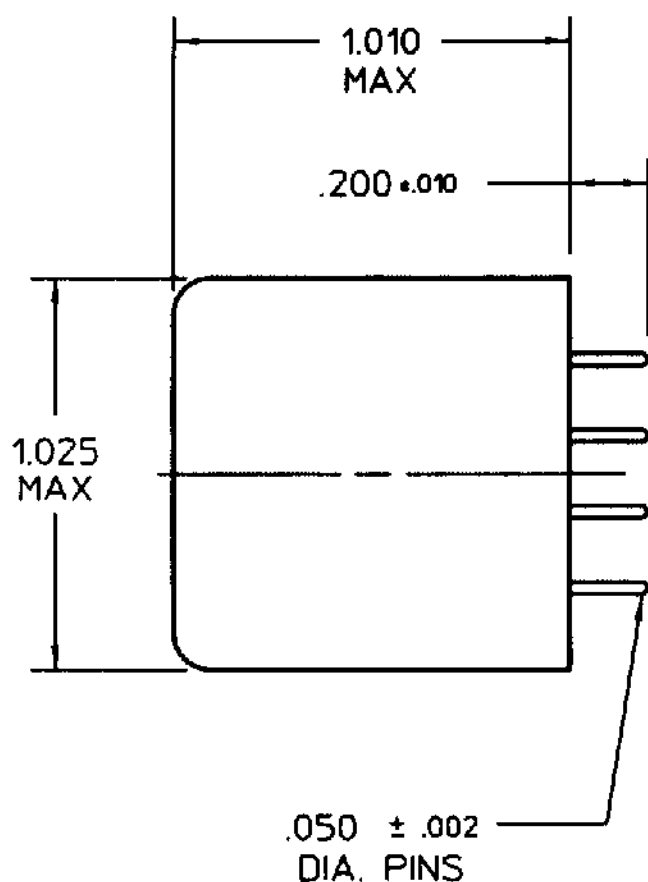

COIL: @ 25°C

RESISTANCE 75 OHMS ± 10%

NOMINAL VOLTAGE 12.0 VDC

MUST OPERATE 6.5 VDC

MUST RELEASE .9 VDC

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 50 g's 11 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 10 MS MAX.

OPERATE BOUNCE 2 MS MAX.

RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

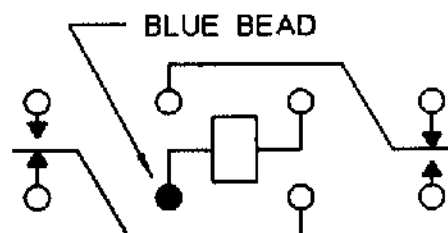

CONTACT RATING: 10 AMPS 28 VDC
5 AMPS 115 VAC/400 Hz RESISTIVE
100,000 OPERATIONS

DR. R.B. 1/20/94

CK. 1/20/94



COMMUNICATIONS
INSTRUMENTS, INC.

CUST. C. I. I.
CUST. NO. STD.

TYPE '07' RELAY

B07A035BB1