


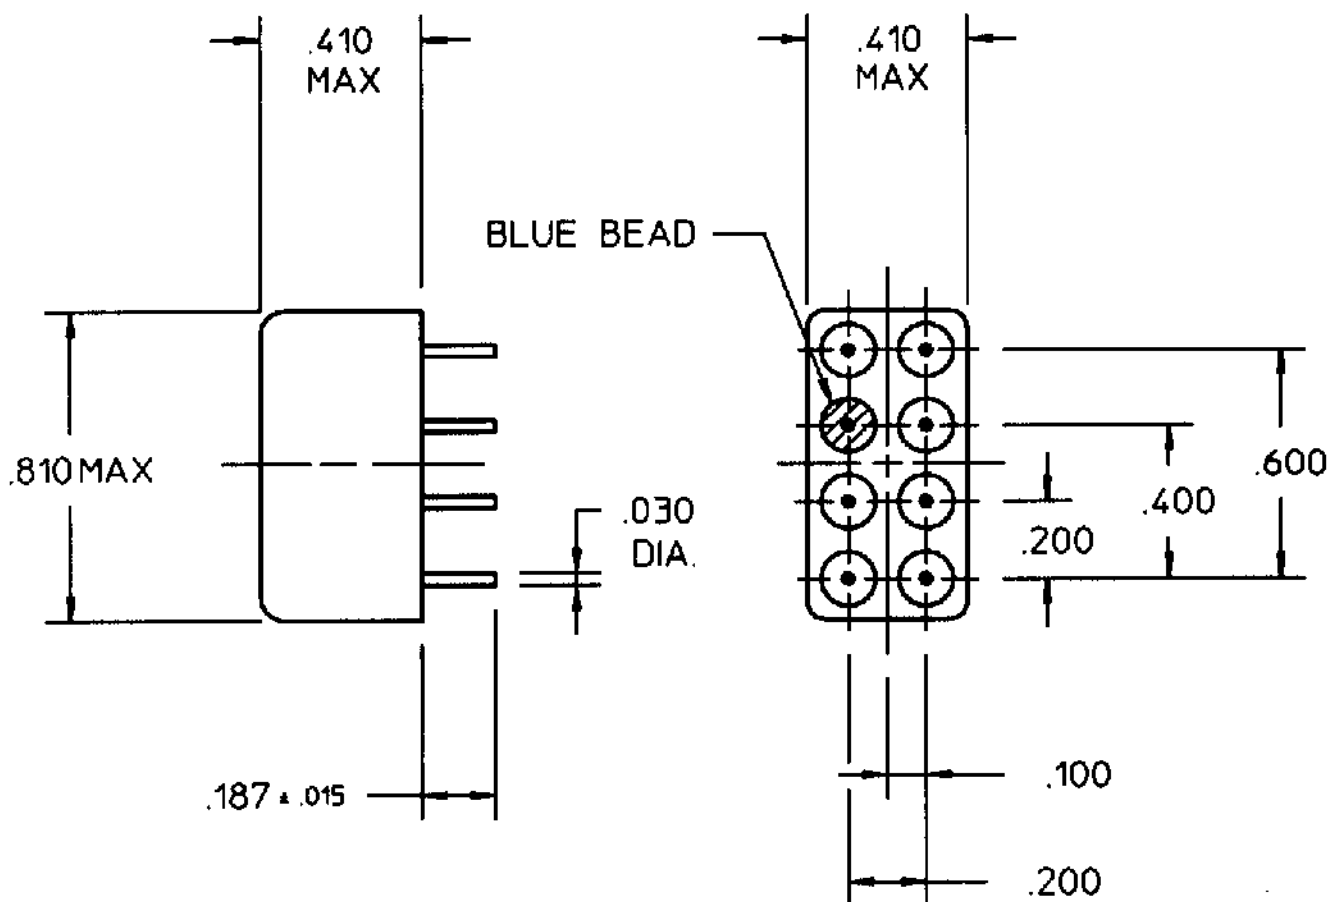


COIL: @ +25 °C
 RESISTANCE 700 OHMS ± 10%
 NOMINAL VOLTAGE 20.0 VDC
 MUST OPERATE 10.6 VDC
 MUST RELEASE 1.06 VDC

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 6 ± 1 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: _____

CUSTOMER DATA SHEET

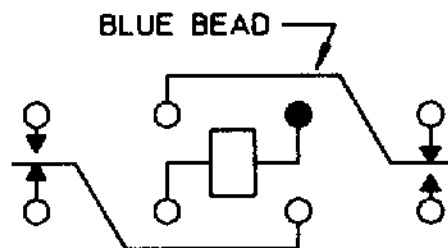

CONTACT RATING: LOW LEVEL TO 2 AMPS
 @ 28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 4/7/92 CK. 4/7/92 Jmb

**COMMUNICATIONS
 INSTRUMENTS, INC.**

CUST. C. I. I. STD.
 CUST. NO. _____

TYPE 'HF' RELAY

HF1201C00