


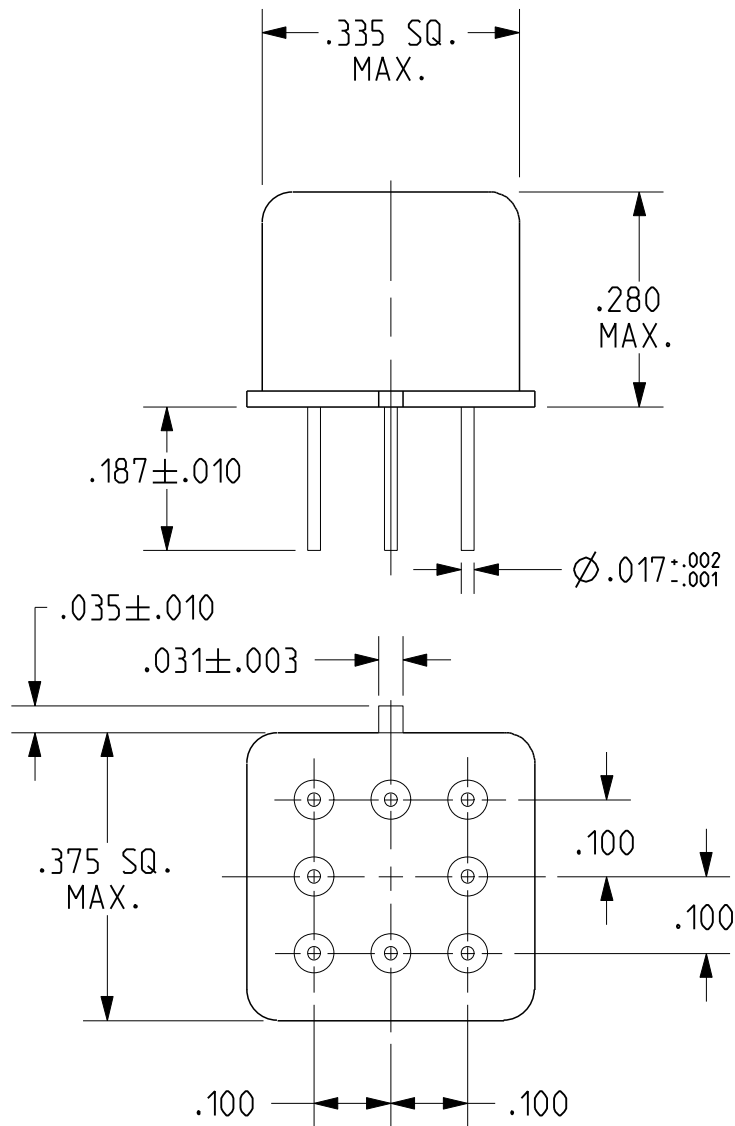

REV. A

DCO 131316


COIL: @ 25°C	
RESISTANCE	1560 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	14.2 VDC
MUST RELEASE	8.0 VDC MAX., 1.37 VDC MIN.

ENVIRONMENT:

VIBRATION 10 Hz TO 3000 Hz @ 30 g's
 SHOCK 75 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX
 RELEASE TIME 1.5 MS MAX
 CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1 AMP
 28 VDC RESISTIVE 100,000 OPERATIONS MIN.

DR. B.D. 17NOV2006

CK. J.M.B. 9/28/10



Tyco Electronics

©COPYRIGHT 2005

TYCO ELECTRONICS CORPORATION
 ALL INTERNATIONAL RIGHTS RESERVED

CUST. QPL
 CUST. NO. M39016/17-030M REV.

TE NUMBER
 1617147-4

CII PART NUMBER

JMGAP-26M