


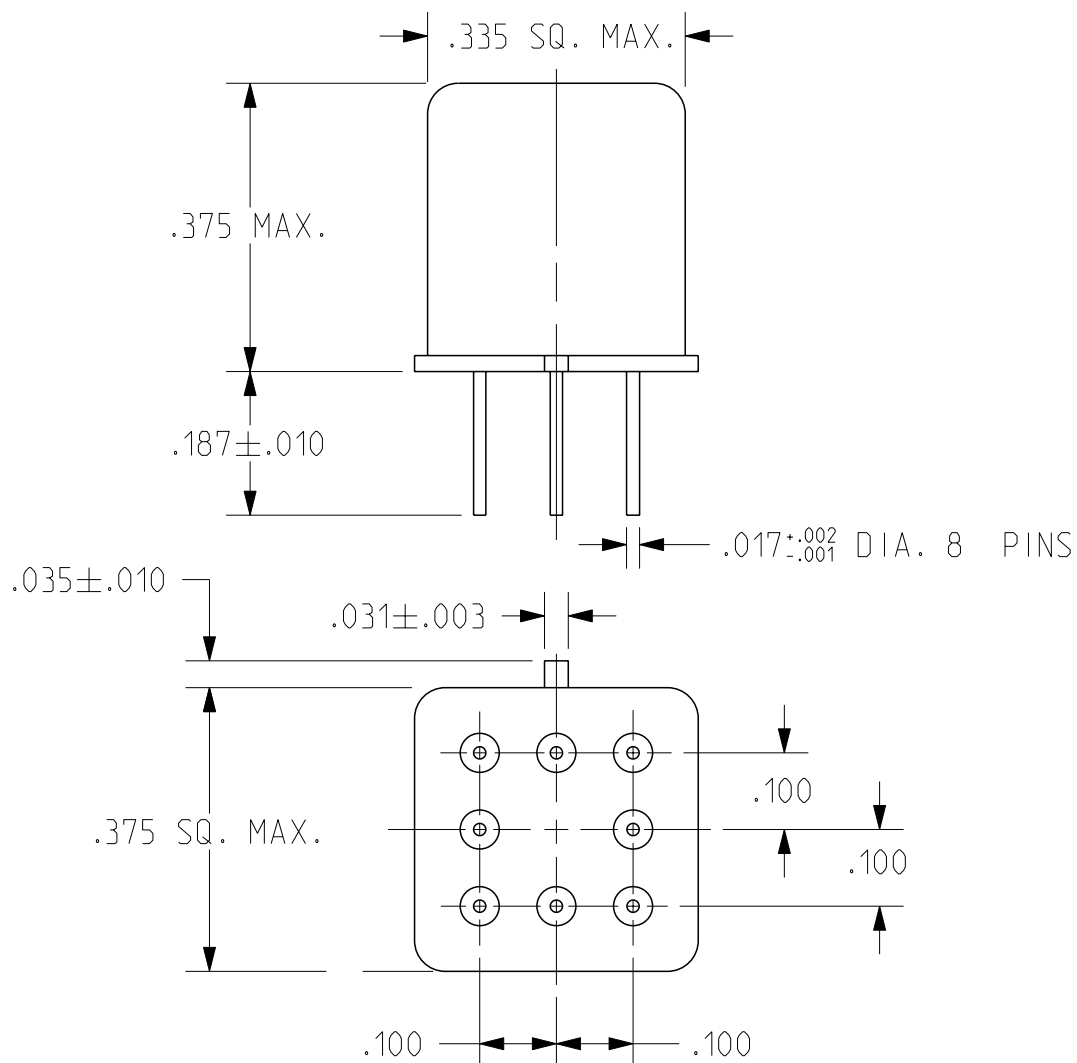


REV. A
DCO 81135

COIL: @ 25°C
RESISTANCE 3200 OHMS ±10%
NOMINAL VOLTAGE 26.5 VDC
MUST OPERATE 14.0 VDC
MUST RELEASE 8.0 VDC MAX, 1.4 VDC MIN.

ENVIRONMENT:
VIBRATION 10 Hz TO 3000 Hz @ 30 g's
SHOCK 75 g's 6 MS. DURATION
TEMPERATURE -65 °C TO +125 °C
NOTES: OPERATE TIME 4.0 MS MAX
RELEASE TIME 7.5 MS MAX
CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS MIN

DR. R.F. 12/06/2012 CK. J.M.B 12/06/2012

TE Connectivity

CUST. QPL
CUST. NO. M39016/42-044P REV.

TE NUMBER

JMGSPD-26P