


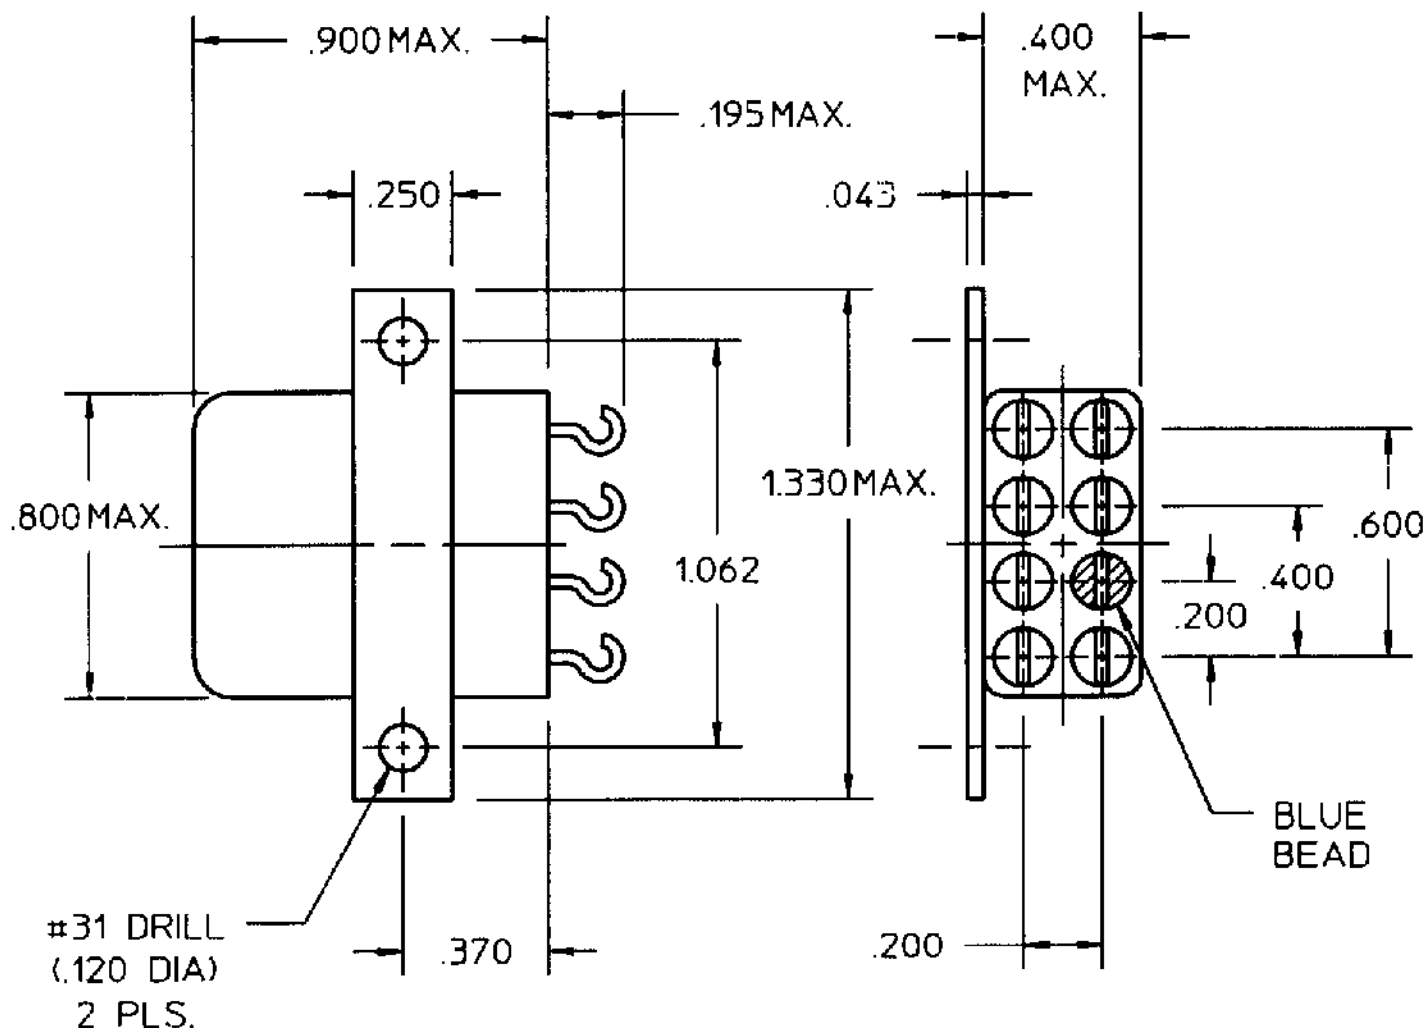


COIL: $\theta + 25^{\circ} \text{C}$
 RESISTANCE 600 OHMS $\pm 10\%$
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 13.0 VDC
 MUST RELEASE 1.5 VDC

ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 6 ± 1 MS. DURATION
 TEMPERATURE -65°C TO $+125^{\circ} \text{C}$

NOTES: OPERATE TIME 6 MS MAX
 RELEASE TIME 3 MS MAX
 CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

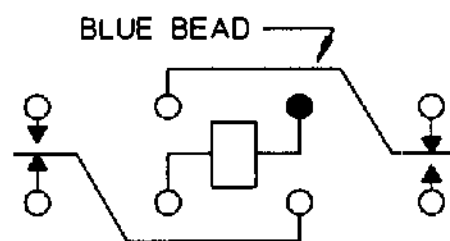

CONTACT RATING: 5 AMPS 30 VDC
 RESISTIVE 100,000 OPERATIONS

DR. R.B. 1/19/93 CK. 1/19/93

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. Hi-G
 CUST. NO. 2BN-1B-126

TYPE FW5A RELAY

FW5A1193S01