


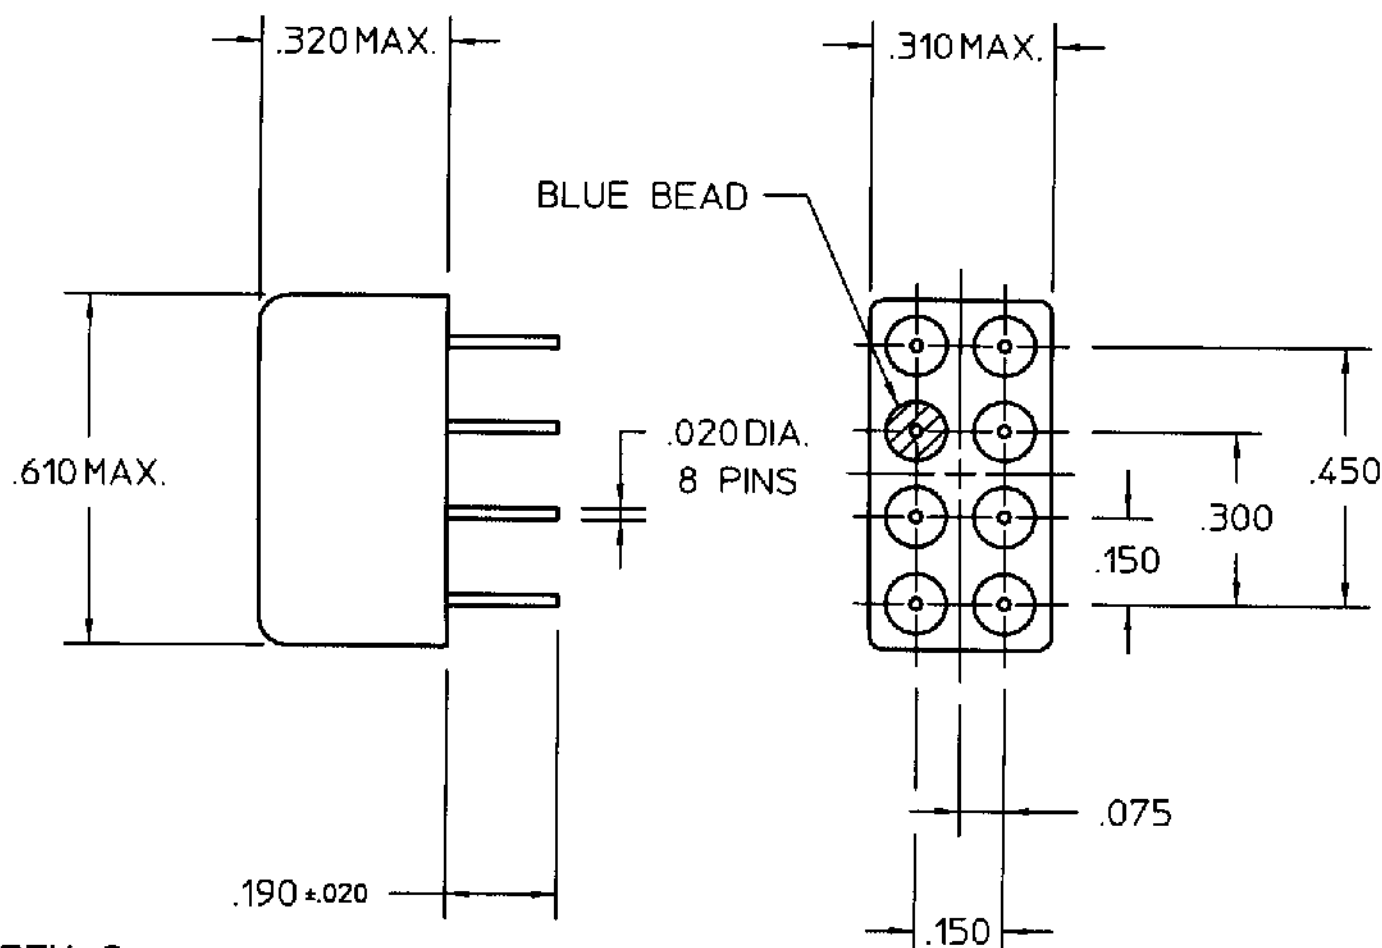

REV. 2

DCO 141865

COIL: @ 25°C
 RESISTANCE 1350 OHMS ± 10%
 NOMINAL VOLTAGE 20.0-35.0 VDC (26.5)
 MUST OPERATE 13.5 VDC
 MUST RELEASE 8.1 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 100 g's 11 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.

BOUNCE 1.5 MS MAX.

DIELECTRIC 500 VAC - ALL POINTS

CUSTOMER DATA SHEET

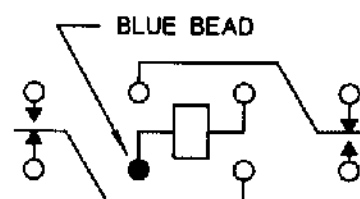

TERMINAL VIEW

CONTACT RATING: 2A 28VDC RES.,
 0.5A 28VDC IND. L/R .008 MAX., 0.5A
 115VAC CASE UNGROUNDED, 125A 115VAC
 CASE GROUNDED RES., 100,000 OPS

DR. R.B. 10/4/96

CK 3/17/00



COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. C.I.I. STD.

CUST. NO. REV.

'3SBC' RELAY

3SBC5004K1