
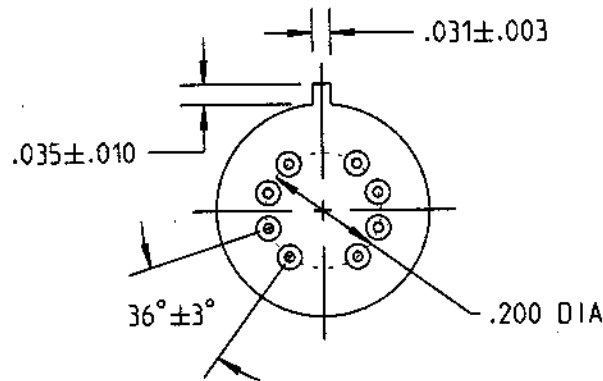


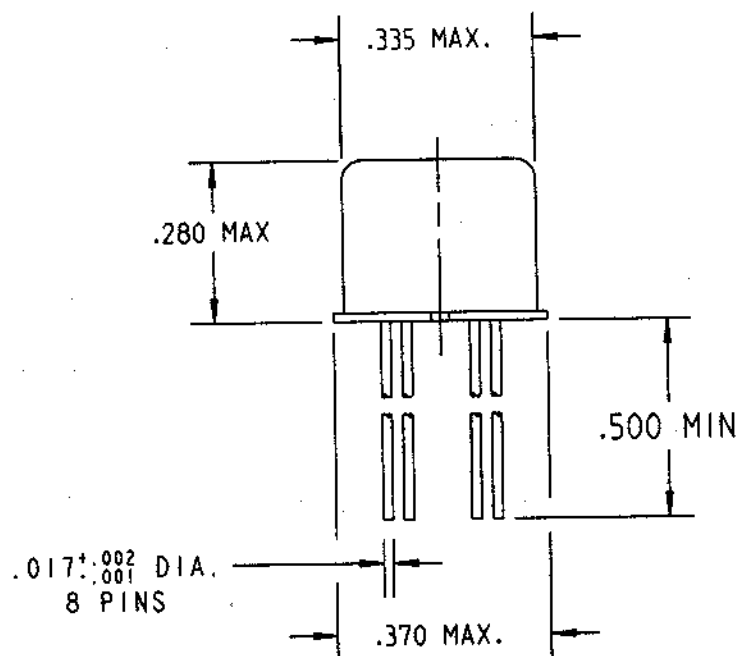

REV. 0
DCO 143665


COIL: @ 25°C	
RESISTANCE	390 OHMS ±10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	7.0 VDC
MUST RELEASE	4.0 VDC MAX. 0.63 VDC MIN.

ENVIRONMENT:

VIBRATION	10	Hz	TO	3000	Hz	@	30	g's
SHOCK	75	g's		6	MS.	DURATION		
TEMPERATURE	-65	°C	TO	+125	°C			

NOTES: OPERATE TIME 2.0 MS MAX.
RELEASE TIME 1.5 MS MAX.
CONTACT STABILIZATION 2.0 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. ASB 2 OCT 02

10/2/02

CII Technologies
advanced control electronic solutions

CUST. OPL
CUST. NO. M39016/9-060P REV.

"JMA" RELAY

JMAC-12XP