


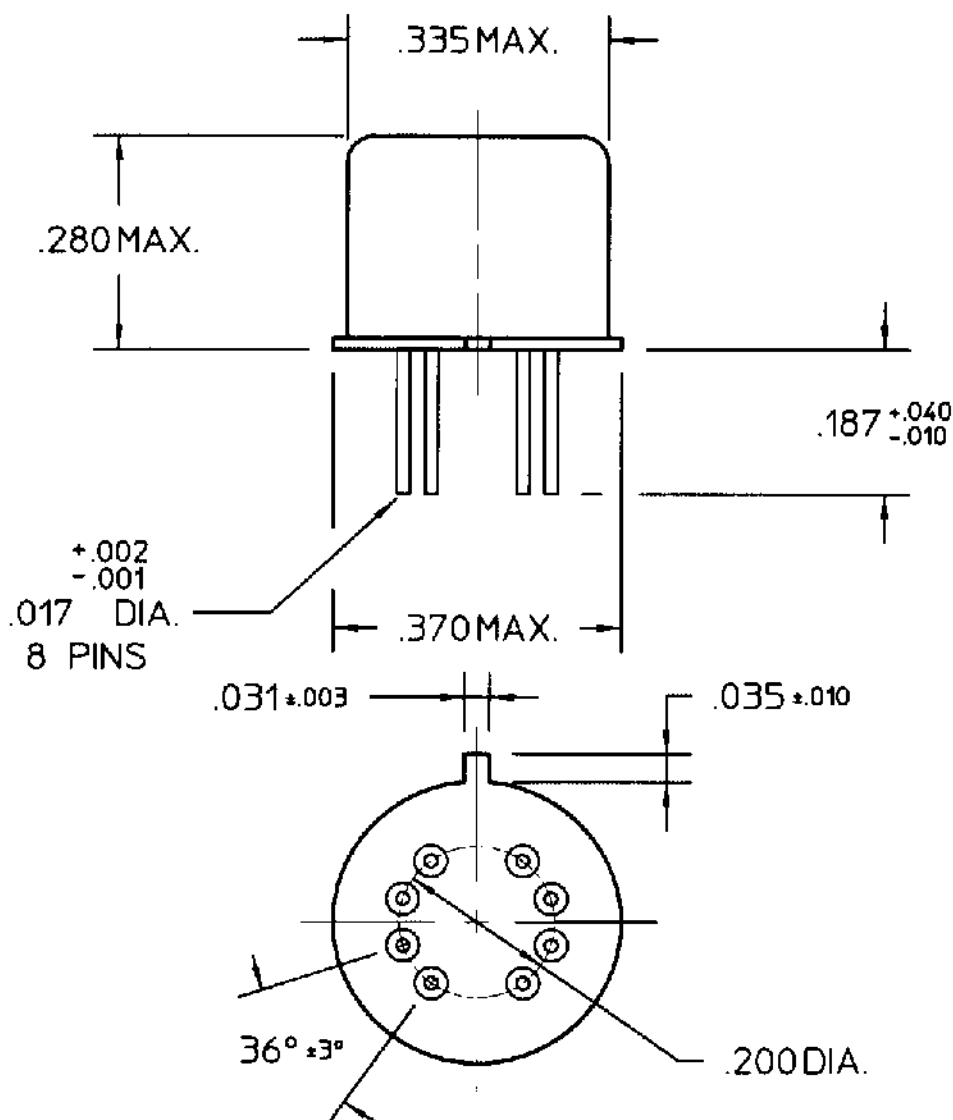

REV. 0


DCO 141346

COIL: @ 25°C
 RESISTANCE 50 OHMS ±10%
 NOMINAL VOLTAGE 5.0 VDC
 MUST OPERATE 2.7 VDC
 1.4 VDC MAX, 0.22 VDC MIN.
 MUST RELEASE

ENVIRONMENT: 10 3000 30
 VIBRATION 75 CPS TO 6 CPS @ g's
 SHOCK g's MS. DURATION
 -65 °C TO +125 °C
 TEMPERATURE

NOTES: OPERATE TIME 2 MS MAX
 RELEASE TIME 4 MS MAX
 CONTACT BOUNCE 1.5 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 9/14/99 CK. 9/14/99

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. C.I.I.
 CUST. NO. STANDARD REV.

PRMAD RELAY

PRMAPD-5X