

## SCB/SCC Series, Specification Grade Discrete Plug-in, Time Delay Relay



### Product Facts

- On-Delay, Off-Delay and Interval timing modes
- 13 timing ranges from 0.1 sec. to 60 min.
- 10A DPDT output contacts
- Knob, fixed or external timing adjustment.
- Rated for pilot duty
- Premium components
- File 3520, File E60363, File LR51332, File E60363 (SCC only)



### Timing Specifications

#### Timing Modes —

On-Delay, Off-Delay and Interval

**Timing Ranges** — 6 to 180 cycles; 0.1 to 3 / 0.1 to 10 / 0.33 to 10 / 1 to 30 / 4 to 120 sec.; 0.33 to 10 / 1 to 30 / 2 to 60 min.; 0.33 to 10 hr. (All are +5%, -0% of maximum values).

#### Timing Adjustment —

Knob or fixed time (internal fixed resistor) — all models; customer supplied external potentiometer or resistor — On-Delay and Interval models only.

#### Accuracy —

Repeat Accuracy —  $\pm 0.5\% \pm 0.004$  sec.  
Overall Accuracy —  $\pm 2\%$  max.

#### Reset Time — 25 ms.

#### Relay Operate Time —

Off-Delay mode — 30 ms;  
Interval mode — 20 ms..

#### Relay Release Time —

On-Delay mode only — 15 ms.

Users should thoroughly review the technical data before selecting a product part number. It is recommended that user also seek out the pertinent approvals files of the agencies/laboratories and review them to ensure the product meets the requirements for a given application.

### Contact Data @ 25°C

#### Arrangements — 2 Form C (DPDT)

**Rating** — 10A @ 28VDC or 120VAC, resistive; 1/3 HP @ 120/240VAC; 345VA. Same polarity.

#### Expected Mechanical Life —

10 million operations

#### Expected Electrical Life — 500,000

operations, min., at rated resistive load

#### Initial Dielectric Strength —

Between Terminals and Case — 1,000VAC plus twice the nominal voltage for one minute.

### Input Data @ 25°C

**Voltage** — See Ordering Information section for details.

#### Power Requirement — 3W, max.

Transient Protection: Non-repetitive transients of the following magnitudes will not cause spurious operation of affect function and accuracy.

| Operating Voltage  | <0.1 ms         | <1 ms |
|--------------------|-----------------|-------|
| All except 12 & 24 | 3,000V          | 2,500 |
| 12 & 24            | Consult Factory |       |

### Environmental Data

#### Temperature Range —

Storage —  
SCB and SCC — -40°C to +85°C

#### Operating —

SCB: -30°C to +65°C;  
SCC: -30°C to +50°C


### Mechanical Data

#### Mounting/Termination —

SCB — UL recognized. Optional 8- or 11-pin octal-type sockets may be ordered separately.


SCC — 8- or 11-pin octal type sockets supplied with timer. (Must be used to qualify as "UL Listed" device.)

**Weight** — SCB: 5.3 oz. (149g) approx.;  
SCC: 7.5 oz. (210g) approx.

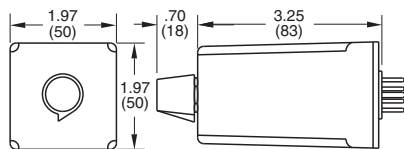

Outline Dimensions

### Wiring Diagrams (Bottom Views)

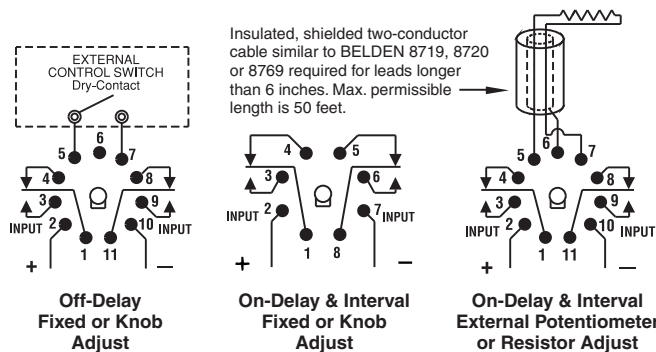

### Ordering Information (All "X"s must be included to complete part number)

| SCB                                                                                                                                                                                                                                     | RX | 01                                                                        | 2XX                               | A                                                                                                                                                                             | A                                                                                                                                                                                                                                                                                                        | XA |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|---------------------------------------------------------------------------|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| <b>Series SCB</b><br>Discrete Industrial Timer                                                                                                                                                                                          |    | <b>Operating Mode</b><br>01 = On-Delay<br>02 = Off-Delay<br>03 = Interval |                                   |                                                                                                                                                                               | <b>Timing Range</b><br>A = 0.1 to 3 sec.<br>B = 0.5 to 15 sec.<br>C = 1 to 30 sec.<br>D = 2 to 60 sec.<br>E = 4 to 120 sec.<br>F = 6 to 180 sec.<br>G = 10 to 300 sec.<br>I = 2 to 60 min.<br>K = 3 to 180 cycles<br>L = 0.33 to 10 min.<br>M = 0.5 to 15 min.<br>N = 1 to 30 min.<br>P = 0.1 to 10 min. |    |
| <b>Mounting Series SCB</b><br>RX = 8- or 11-pin socket (order separately)                                                                                                                                                               |    |                                                                           | <b>Output</b><br>2XX = DPDT Relay |                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                          |    |
| <b>Mounting Series SCC</b><br>LA = 8-pin socket p/n BCSA08SC for operating mode 01 or 03 with knob adjust or fixed time.<br>LC = 11-pin socket p/n BCSA11SC for operating mode 02; or 01 or 03 with external potentiometer or resistor. |    |                                                                           |                                   | <b>Operating Voltage (+10%, -15%)</b><br>A = 120VAC, 50/60 Hz. / 120VDC<br>B = 240VAC, 50/60 Hz.<br>E = 24VAC, 50/60 Hz. / 24VDC<br>F = 48VAC, 50/60 Hz. / 48VDC<br>Q = 12VDC | <b>Timing Adjustment</b><br>XA = Knob Adjust<br>XB = External Potentiometer or resistor (Operating modes 1 and 3 only).<br>XF = Fixed Times —Specify time delay in seconds per the following examples:<br>XF9.000 = 9 sec.<br>XF99.00 = 99 sec.<br>XF999.0 = 999 sec.<br>XF1000 = 1000 sec.              |    |

### Authorized distributors are likely to stock the following:

None at present.

BELDEN is a trademark of Belden Technologies, Inc.