



120W Level VI Desktop Type Power Supply

ENP-120 series



■ Features

- Universal AC input / Full range
- Built-in active PFC function
- Energy efficiency Level VI
- No load power consumption <0.15W
- Comply with EISA 2007/DoE, NRCan and EU ErP
- 125% peak load capability
- Fanless design, cooling by free air convection
- Protection: Short circuit / Overload / Over voltage / Over temperature
- 3 years warranty

■ Applications

- Land mobile radio system
- Surveillance system
- TV antenna facility

■ Description

ENP-120 series is a 120W desktop type power supply working perfectly for communication related applications. Observing the standard 7" width size in the land mobile radio field, it provides the most frequently used voltage in the communication field. With the rugged mechanical design along with the high efficiency circuitry, it operates for the ambient temperature range -30°C ~ +70°C under free air convection.

■ Model Encoding


ENP - 120 - 24

Nominal voltage
Rated wattage
Series name


SPECIFICATION

MODEL		ENP-120-12		ENP-120-24	ENP-120-48	
OUTPUT	DC VOLTAGE		13.8V		27.6V	55.2V
	RATED CURRENT		8.7A		4.3A	2.2A
	CURRENT	RATED	0 ~ 8.7A		0 ~ 4.3A	0 ~ 2.2A
		PEAK Note.2	10.9A		5.38A	2.75A
	WATTAGE	RATED	120W		119W	121W
		PEAK Note.2	150.4W		148.5W	151.8W
	RIPPLE & NOISE (max.) Note.3		150mVp-p		150mVp-p	350mVp-p
	VOLTAGE ADJ. RANGE		11.5 ~ 15V		23.5 ~ 30V	47.5 ~ 58.8V
	VOLTAGE TOLERANCE Note.4		± 1.0%		± 1.0%	± 1.0%
	LINE REGULATION Note.5		± 0.5%		± 0.5%	± 0.5%
	LOAD REGULATION Note.6		± 2.0%		± 1.0%	± 0.5%
SETUP, RISE TIME Note.7		1000ms, 100ms at full load				
HOLD UP TIME (Typ.)		20ms at full load				
INPUT	VOLTAGE RANGE Note.8		90 ~ 264VAC 127 ~ 370VDC			
	FREQUENCY RANGE		47 ~ 63Hz			
	POWER FACTOR (Typ.)		PF>0.98/115VAC, PF>0.95/230VAC at full load			
	EFFICIENCY (Typ.)		89.5%		91%	91.5%
	AC CURRENT (Typ.)		1.25A/115VAC 0.63A/230VAC			
	INRUSH CURRENT (Typ.)		COLD START 65A at 230VAC			
	LEAKAGE CURRENT		<3.5mA / 240VAC			
NO LOAD POWER CONSUMPTION		<0.15W				
PROTECTION	SHORT CIRCUIT		Protection type : Constant current limiting, recovers automatically after fault condition is removed			
	OVERLOAD		Normally works within 110 ~ 125% rated output power for more than 3 seconds and switches to constant current limiting, with auto-recovery after the peak load condition is removed			
			Constant current limiting, if >125% rated power, with auto-recovery after the overload condition is removed			
	OVER VOLTAGE		15.5 ~ 18.2V		31 ~ 36.5V	62.1 ~ 72.9V
			Protection type : Shut down o/p voltage, re-power on to recover			
OVER TEMPERATURE		Shut down O/P voltage, recovers automatically after temperature goes down				
ENVIRONMENT	WORKING TEMP.		-30 ~ +70℃ (Refer to "Derating Curve")			
	WORKING HUMIDITY		20 ~ 95% RH non-condensing			
	STORAGE TEMP., HUMIDITY		-40 ~ +85℃, 10 ~ 95% RH non-condensing			
	TEMP. COEFFICIENT		±0.05%/℃ (0 ~ 50℃)			
VIBRATION		10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes				
SAFETY & EMC (Note 9)	SAFETY STANDARDS		IEC60950-1, UL60950-1, EAC TP TC 004 approved			
	WITHSTAND VOLTAGE		I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC			
	ISOLATION RESISTANCE		I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃ / 70% RH			
	EMC EMISSION		Parameter	Standard	Test Level / Note	
			Conducted	EN55032 (CISPR32) / FCC PART15 (CISPR22)	Class B	
			Radiated	EN55032 (CISPR32) / FCC PART15 (CISPR22)	Class B	
			Harmonic Current	EN61000-3-2	-----	
			Voltage Flicker	EN61000-3-3	-----	
	EMC IMMUNITY		EN55024			
			Parameter	Standard	Test Level / Note	
			ESD	EN61000-4-2	Level 3, 8KV air ; Level 2, 4KV contact	
			Radiated	EN61000-4-3	Level 2, 3V/m	
			EFT / Burst	EN61000-4-4	Level 2, 1KV	
			Surge	EN61000-4-5	Level 2, 1KV/Line-Line,Level 3, 2KV/Line-Earth	
			Conducted	EN61000-4-6	Level 2, 3Vrms	
Magnetic Field			EN61000-4-8	Level 1, 1A/m		
Voltage Dips and Interruptions			EN61000-4-11	>95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods		
OTHERS	MTBF		257K hrs min. MIL-HDBK-217F (25℃)			
	DIMENSION		192*178*45.5mm (L*W*H)			
	PACKING		0.98Kg; 10pcs/10.8Kg /1.38CUFT			
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature. 2. Peak current or peak power up to 3 seconds is provided. 3. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 4. Tolerance : includes set up tolerance, line regulation and load regulation. 5. Line regulation is measured from low line to high line at rated load. 6. Load regulation is measured from 0% to 100% rated load. 7. Length of set up time is measured at cold first start. Turning ON/OFF the power supply very quickly may lead to increase of the set up time. 8. Derating may be needed under low input voltages. Please check the derating curve for more details. 9. The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com) 10. The ambient temperature derating of 3.5℃/1000m with fanless models and of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft).					


■ Block Diagram

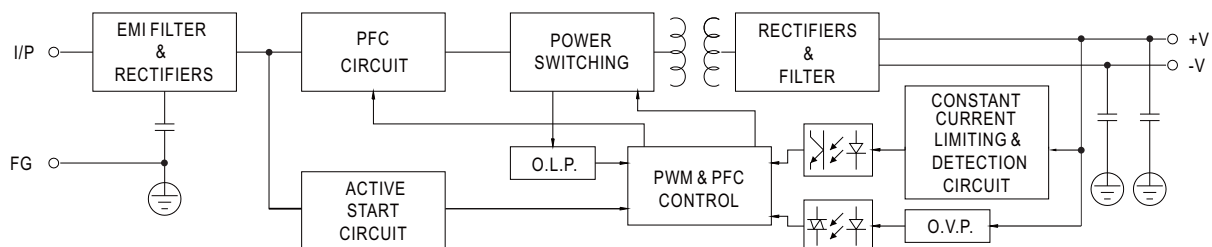

■ Derating Curve

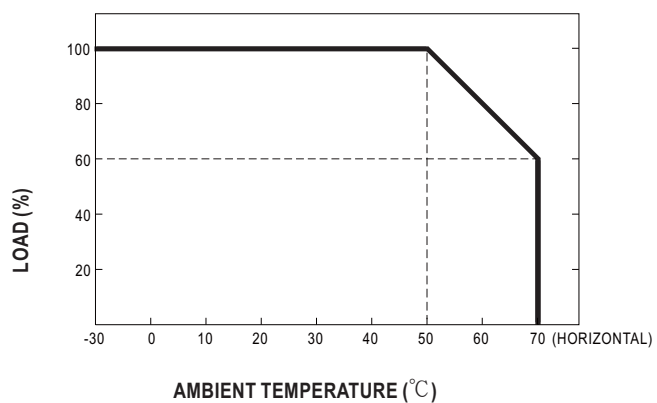


■ Static Characteristics

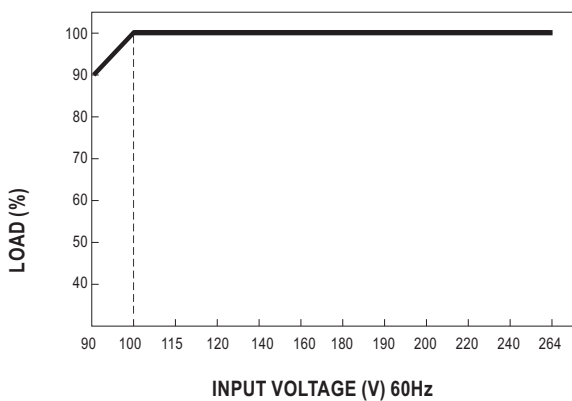

Mechanical Specification

Case No. 252A Unit:mm

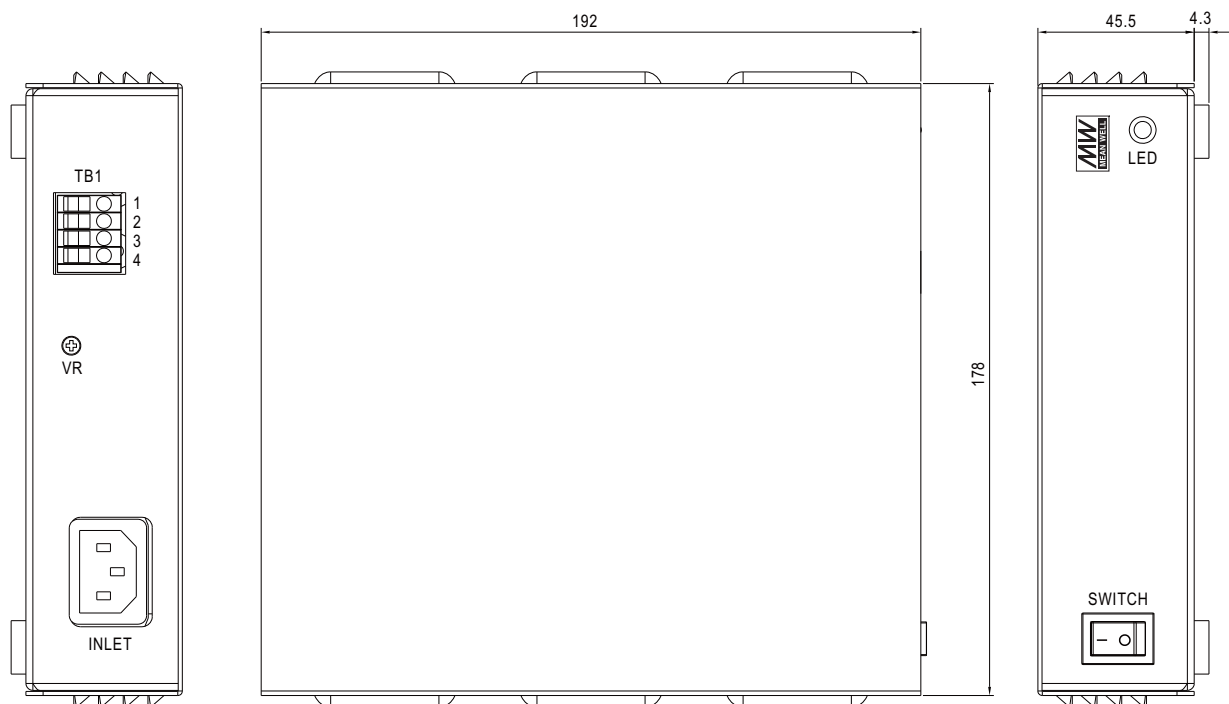

Terminal Pin No. Assignment (TB1):

Pin No.	Assignment
1,2	+V
3,4	-V

Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>