

High-Speed $\pm 100\text{V}$ 2.5A Two-or-Three-Level Ultrasound Pulsers

Features

- High-Density Integration AC-coupled Pulser
- 0V to $\pm 100\text{V}$ Output Voltage
- $\pm 2.5\text{A}$ Source and Sink Minimum Pulse Current
- Up to 35 MHz Operating Frequency
- 2 ns Matched Delay Times
- 2.5V, 3.3V or 5V CMOS Logic Interface
- Built-in Two-terminal Low-noise Interface for HV7361
- Low Power Consumption and No Floating Power Supply Rails or Decoupling Capacitors

Applications

- Medical Ultrasound Imaging
- Piezoelectric Transducer Drivers
- Ultrasound Industrial NDT
- Pulse Waveform Generator

General Description


The HV7360/HV7361 are high-voltage and high-speed pulse generators with built-in, fast return-to-zero damping Field-Effect Transistors (FETs). An added feature to HV7361 is an integrated two-terminal low-noise T/R switch. These integrated circuits are designed not only for portable medical ultrasound image devices but also for NDT and test equipment applications.

Both the HV7360/HV7361 are composed of controller logic interface circuits, level translators and AC-coupled Metal Oxide Semiconductor Field-Effect Transistor (MOSFET) gate drivers. They also have high-voltage and high-current P-channel and N-channel MOSFETs as output stages.

The peak output currents of each channel are guaranteed to be over $\pm 2.5\text{A}$ with up to $\pm 100\text{V}$ of pulse swing. The AC coupling topology for the gate drivers not only saves two floating voltage supplies but also makes the PCB layout easier.

Package Type

22-lead CABGA
(Top view)

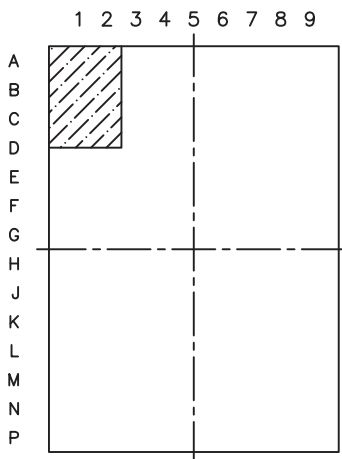

See [Table 2-1](#) for pad information.

1.0 ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings †

Chip Power Supply Voltage, $V_{DD}-V_{SS}$		-0.5 to +12.5V
Output High Supply Voltage, V_H		$V_L-0.5$ to $V_{DD}+0.5V$
Output Low Supply Voltage, V_L		$V_{SS}-0.5V$ to $V_H+0.5V$
Low-side Supply Voltage, V_{SS}		-6V to +0.5V
Differential High Voltage, $V_{SP1}-V_{SN1}$, $V_{SP2}-V_{SN2}$		+220V
Positive High Voltage, $V_{SP1,2}$		-0.5V to +110V
Negative High Voltage, $V_{SN1,2}$		+0.5V to -110V
All Logic Input Voltages		$V_{SS}-0.5V$ to GND +5.5V
Rx to XDCR Differential Drop		±140V
Coupling Capacitor Breakdown Voltage		±110V
Maximum Junction Temperature, T_J		125°C
Operating Ambient Temperature, T_A		-40°C to +85°C

† **Notice:** Stresses above those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only, and functional operation of the device at those or any other conditions above those indicated in the operational sections of this specification is not intended. Exposure to maximum rating conditions for extended periods may affect device reliability.

OPERATING SUPPLY VOLTAGES AND CURRENT

Electrical Specifications: GND = 0V, $V_H = V_{DD} = +10V$, $V_L = V_{SS} = 0V$, $V_{PE} = 3.3V$, $V_{PP} = +100V$, $V_{NN} = -100V$, $T_A = 25^\circ C$ unless otherwise specified.

Parameter	Sym.	Min.	Typ.	Max.	Unit	Conditions
Logic Supply Voltage Range	V_{LL}	2.25	—	3.63	V	
Supply Voltage	$V_{DD}-V_{SS}$	4.75	—	11.5	V	$4V \leq V_{DD} \leq 11.5V$
Low Side Supply Voltage	V_{SS}	-5.5	—	0	V	
Gate Drive High-side Voltage	V_H	$V_{SS}+4$	—	V_{DD}	V	$V_H-V_L \geq 4V$
Gate Drive Low-side Voltage	V_L	V_{SS}	—	$V_{DD}-4$	V	
Output Positive High Voltage	$V_{SP1,2}$	0	—	100	V	
Output Negative High Voltage	$V_{SN1,2}$	-100	—	0	V	
V_{DD} Quiescent Current	I_{DDQ}	—	50	—	μA	No input transitions, PE = 0
V_H Quiescent Current	I_{HQ}	—	2	—	μA	
V_{DD} Quiescent Current	I_{DDQ}	—	1	—	mA	No input transitions, PE = 1
V_H Quiescent Current	I_{HQ}	—	2	—	μA	
V_{DD} Average Current	I_{DD}	—	4	—	mA	One channel on at 5 MHz, no load
V_H Average Current	I_H	—	10	—	mA	
Input Logic Voltage High	V_{IH}	$V_{PE}-0.3$	—	V_{PE}	V	For logic inputs INA, INB, INC and IND
Input Logic Voltage Low	V_{IL}	0	—	0.3	V	
Input Logic Current High	I_{IH}	—	—	1	μA	
Input Logic Current Low	I_{IL}	—	—	1	μA	
PE Input Logic Voltage High	V_{PEH}	1.7	3.3	5.25	V	For logic input PE
PE Input Logic Voltage Low	V_{PEL}	0	—	0.3	V	
PE Input Impedance to GND	R_{INPE}	100	—	—	kΩ	

HV7360/HV7361

AC ELECTRICAL CHARACTERISTICS

Electrical Specifications: GND = 0V, $V_H = V_{DD} = +10V$, $V_L = V_{SS} = 0V$, $V_{PE} = 3.3V$, $V_{PP} = +100V$, $V_{NN} = -100V$, $T_A = 25^\circ C$ unless otherwise specified.						
Parameter	Sym.	Min.	Typ.	Max.	Unit	Conditions
Input or PE Rise and Fall Time	t_{irf}	—	—	10	ns	Logic input edge speed requirement
Input to Output Delay	t_{d1-4}	—	7.5	—	ns	$R_{LOAD} = 1\Omega$
Output Rise and Fall Time	$t_{r/f1-2}$	—	9.5	—	ns	$C_{LOAD} = 330\text{ pF}$, $R_{LOAD} = 2.5\text{ k}\Omega$
Rise and Fall Time Matching	Δt_{rf}	—	2	—	ns	Channel to channel
Propagation Matching	Δt_{dC2C}	—	1	—	ns	
Propagation Delay Matching	Δt_{dD2D}	—	± 2	—	ns	Device to device delay match
PE On-time	t_{PE-ON}	—	—	5	μs	$V_{PE} = 1.7 \sim 5.25V$, $V_{DD} = 7.5 \sim 11.5V$, $-20 \sim 85^\circ C$
PE Off-time	t_{PE-OFF}	—	—	4		
Output to MOSFET Gate Cap	C_{OG}	—	10	—	nF	100V X7S
V_H to V_{L3} Decoupling Cap	C_{VH}	—	0.22	—	μF	16V X7R

ELECTRICAL CHARACTERISTICS

Electrical Specifications: GND = 0V, V _H = V _{DD} = +10V, V _L = V _{SS} = 0V, V _{PE} = 3.3V, V _{PP} = +100V, V _{NN} = −100V, T _A = 25°C unless otherwise specified.						
Parameter	Sym.	Min.	Typ.	Max.	Unit	Conditions
PULSER AND DAMPING P-CHANNEL MOSFET						
DC PARAMETER						
Drain-to-source Breakdown Voltage	BV _{DSS}	−200	—	—	V	V _{GS} = 0V, I _D = −2 mA
Gate Threshold Voltage	V _{GS(th)}	−1	—	−2.4	V	V _{GS} = V _{DS} , I _D = −1 mA
Change in V _{GS(th)} with Temperature	ΔV _{GS(th)}	—	—	4.5	mV/°C	V _{GS} = V _{DS} , I _D = −1 mA
Gate-to-source Shunt Resistor	R _{GS}	10	—	50	kΩ	I _{GS} = 100 μA, if applied
Gate-to-source Zener Voltage	V _{ZGS}	13.2	—	25	V	I _{GS} = −2 mA, if applied
Zero-gate Voltage Drain Current	I _{DSS}	—	—	−10	μA	V _{DS} = Maximum rating, V _{GS} = 0V
		—	—	−1	mA	V _{DS} = 0.8 maximum rating, V _{GS} = 0V, T _A = 125°C
ON-state Drain Current	I _{D(ON)}	−1.2	—	—	A	V _{GS} = −5V, V _{DS} = −25V
		−2.3	−2.5	—		V _{GS} = −10V, V _{DS} = −50V
Static Drain-to-source ON-state Resistance	R _{DS(ON)}	—	—	8.5	Ω	V _{GS} = −5V, I _D = −150 mA
		—	—	7		V _{GS} = −10V, I _D = −1A
Change in R _{DS(ON)} with Temperature	ΔR _{DS(ON)}	—	—	1	%/°C	V _{GS} = −10V, I _D = −1 mA
AC PARAMETER						
Forward Transconductance	G _{FS}	400	—	—	mmho	V _{DS} = −25V, I _D = −500 mA
Input Capacitance	C _{ISS}	—	75	—	pF	V _{GS} = 0V, V _{DS} = −25V, f = 1 MHz
Common Source Output Capacitance	C _{OSS}	—	21	—		
Reverse Transfer Capacitance	C _{RSS}	—	6.5	—		
DIODE PARAMETER						
Diode Forward Voltage Drop	V _{SBD}	—	—	1.8	V	V _{GS} = 0V, I _{SD} = 500 mA
Reverse Recovery Time of Body Diode	t _{rrBD}	—	300	—	ns	
PULSER AND DAMPING N-CHANNEL MOSFET						
DC PARAMETER						
Drain-to-source Breakdown Voltage	BV _{DSS}	200	—	—	V	V _{GS} = 0V, I _D = 2 mA
Gate Threshold Voltage	V _{GS(th)}	1	—	2.4	V	V _{GS} = V _{DS} , I _D = 1 mA

ELECTRICAL CHARACTERISTICS (CONTINUED)

Electrical Specifications: GND = 0V, $V_H = V_{DD} = +10V$, $V_L = V_{SS} = 0V$, $V_{PE} = 3.3V$, $V_{PP} = +100V$, $V_{NN} = -100V$, $T_A = 25^\circ C$ unless otherwise specified.

Parameter	Sym.	Min.	Typ.	Max.	Unit	Conditions
Change in $V_{GS(th)}$ with Temperature	$\Delta V_{GS(th)}$	—	—	−4.5	mV/°C	$V_{GS} = V_{DS}$, $I_D = 1\text{ mA}$
Gate-to-source Shunt Resistor	R_{GS}	10	—	50	k Ω	$I_{GS} = 100\text{ }\mu\text{A}$
Gate-to-source Zener Voltage	V_{ZGS}	13.2	—	25	V	$I_{GS} = 2\text{ mA}$
Zero Gate Voltage Drain Current	I_{DSS}	—	—	10	μA	$V_{DS} = \text{Maximum rating}$, $V_{GS} = 0\text{V}$
		—	—	1	mA	$V_{DS} = 0.8\text{ maximum rating}$, $V_{GS} = 0\text{V}$, $T_A = 125^\circ\text{C}$
ON-state Drain Current	$I_{D(ON)}$	1.3	—	—	A	$V_{GS} = 5\text{V}$, $V_{DS} = 25\text{V}$
		2.3	2.5	—		$V_{GS} = 10\text{V}$, $V_{DS} = 50\text{V}$
Static Drain-to-source ON-state Resistance	$R_{DS(ON)}$	—	—	6.5	Ω	$V_{GS} = 5\text{V}$, $I_D = 150\text{ mA}$
		—	—	6		$V_{GS} = 10\text{V}$, $I_D = 1\text{A}$
Change in $R_{DS(ON)}$ with Temperature	$\Delta R_{DS(ON)}$	—	—	1	%/°C	$V_{GS} = 10\text{V}$, $I_D = 1\text{A}$
AC PARAMETER						
Forward Transconductance	G_{FS}	400	—	—	mmho	$V_{DS} = 25\text{V}$, $I_D = 500\text{ mA}$
Input Capacitance	C_{ISS}	—	56	—	pF	$V_{GS} = 0\text{V}$, $V_{DS} = 25\text{V}$, $f = 1\text{ MHz}$
Common Source Output Capacitance	C_{OSS}	—	13	—		
Reverse Transfer Capacitance	C_{RSS}	—	2	—		
DIODE PARAMETER						
Diode Forward Voltage Drop	V_{SBD}	—	—	1.8	V	$V_{GS} = 0\text{V}$, $I_{SD} = 500\text{ mA}$
Reverse Recovery Time of Body Diode	t_{rrBD}	—	300	—	ns	

HV7361 T/R SWITCH CHARACTERISTICS

Parameter	Sym.	Min.	Typ.	Max.	Unit	Conditions
Breakdown Voltage from XDCR to Rx	B_{VA-B}	± 130	—	—	V	$I_{A-B} = \pm 1\text{ mA}$
Switch-on Resistance from XDCR to Rx	R_{SW}	—	15	—	Ω	$I_{A-B} = \pm 5\text{ mA}$
V_{A-B} Trip Point to Turn Off	V_{TRIP}	—	± 1	± 2	V	
Switch Turn-off Voltage	V_{OFF}	—	± 2	—	V	$I_{A-B} = \pm 1\text{ mA}$
Switch-off Current	$I_{A-B(OFF)}$	—	± 200	± 300	μA	$V_{A-B} = \pm 130V$
Peak Switching Current	I_{PEAK}	—	± 60	—	mA	
Turn-off Time	T_{OFF}	—	—	20	ns	
Turn-on Time	T_{ON}	—	—	20	ns	
Switch-on Capacitance from A to B or B to A	$C_{SW(ON)}$	—	21	—	pF	SW = On
Switch-off Capacitance from A to B or B to A	$C_{SW(OFF)}$	—	15	—	pF	$V_{SW} = 25V$
Small Signal Bandwidth	BW	—	100	—	MHz	$R_{LOAD} = 50\Omega$

HV7360/HV7361

TEMPERATURE SPECIFICATIONS

Electrical Characteristics: Unless otherwise noted, for all specifications $T_A = T_J = +25^{\circ}\text{C}$.						
Parameter	Sym.	Min.	Typ.	Max.	Unit	Conditions
TEMPERATURE RANGE						
Maximum Junction Temperature	T_J	—	—	125	$^{\circ}\text{C}$	
Operating Temperature	T_A	-40	—	+85	$^{\circ}\text{C}$	
PACKAGE THERMAL RESISTANCE						
22-Lead CABGA	θ_{JA}	—	106	—	$^{\circ}\text{C/W}$	

POWER-UP AND POWER-DOWN SEQUENCE 1

Power-up		Power-down	
Step	Description	Step	Description
1	V_{LL}	1	PE inactive
2	V_{DD} , V_H , V_{SS} and V_L with signal logic low	2	V_{PP} and V_{NN} off
3	V_{PP} and V_{NN}	3	V_{DD} , V_H , V_{SS} and V_L off
4	PE active	4	V_{LL} off

Note 1: Powering up or down in any arbitrary sequence will not cause any damage to the device. The power-up sequence and power-down sequence are only recommended to minimize possible inrush current.

LOGIC CONTROL TABLE

PE	Input Pulse				Output MOSFETs			
	INA	INB	INC	IND	SP1 to DP1	DN1 to SN1	SP2 to DP2	DN2 to SN2
1	1	X	X	X	ON	X	X	X
	X	1	X	X	X	ON	X	X
	X	X	1	X	X	X	ON	X
	X	X	X	1	X	X	X	ON
	0	X	X	X	OFF	X	X	X
	X	0	X	X	X	OFF	X	X
	X	X	0	X	X	X	OFF	X
	X	X	X	0	X	X	X	OFF
0	X	X	X	X	OFF	OFF	OFF	OFF

2.0 PAD DESCRIPTION

Table 2-1 details the description of pads in HV7360/HV7361. Refer to [Package Type](#) for the location of pads.

TABLE 2-1: PAD FUNCTION TABLE

Pad Location	HV7360 Symbol	HV7361 Symbol	Description
A1	GND	GND	Driver and level translator circuit ground return (0V)
A2	IND	IND	Damping N-FET control signal logic input, controlling N-FET2
A3	INC	INC	Damping P-FET control signal logic input, controlling P-FET2
A4	V _{SS}	V _{SS}	Negative voltage power supply (0V)
A6	V _{DD}	V _{DD}	Positive voltage supply (+10V), should connect to an external decoupling cap to V _{SS} (0V)
A7	INB	INB	Pulsing N-FET control signal logic input, controlling N-FET1
A8	INA	INA	Pulsing P-FET control signal logic input, controlling P-FET1
A9	PE	PE	Drive power enable Hi = On, Low = Off, logic '1' voltage reference input (+2.5V to +3.3V)
B2	V _{L2}	V _{L2}	Gate-drive negative voltage power supply (0V)
B8	V _{L1}	V _{L1}	Gate-drive negative voltage power supply (0V)
F4	V _H	V _H	Gate-drive positive voltage power supply (+10V)
F7	V _{L3}	V _{L3}	V _H to V _L decoupling cap. The trace connecting V _{L1} , V _{L2} , and V _{L3} (0V) to ground plane should be as short as possible.
G4	NC	—	No connection for HV7360
	—	RX	T/R switch output for HV7361
P1	SP2	SP2	Source of P-FET2, positive high voltage power supply (0V to +100V) or GND
P2	DP2	DP2	Drain of P-FET2, transmit pulser output
P3	DN2	DN2	Drain of N-FET2, transmit pulser output
P4	SN2	SN2	Source of N-FET2, negative high voltage power supply (0V to –100V) or GND
P5	NC	—	No connection for HV7360
	—	XDCR	T/R switch input for HV7361
P6	SP1	SP1	Source of P-FET1, positive high voltage power supply (0V to +100V)
P7	DP1	DP1	Drain of P-FET1, transmit pulser output
P8	DN1	DN1	Drain of N-FET1, transmit pulser output
P9	SN1	SN1	Source of N-FET1, negative high voltage power supply (0V to –100V)

HV7360/HV7361

3.0 FUNCTIONAL DESCRIPTION

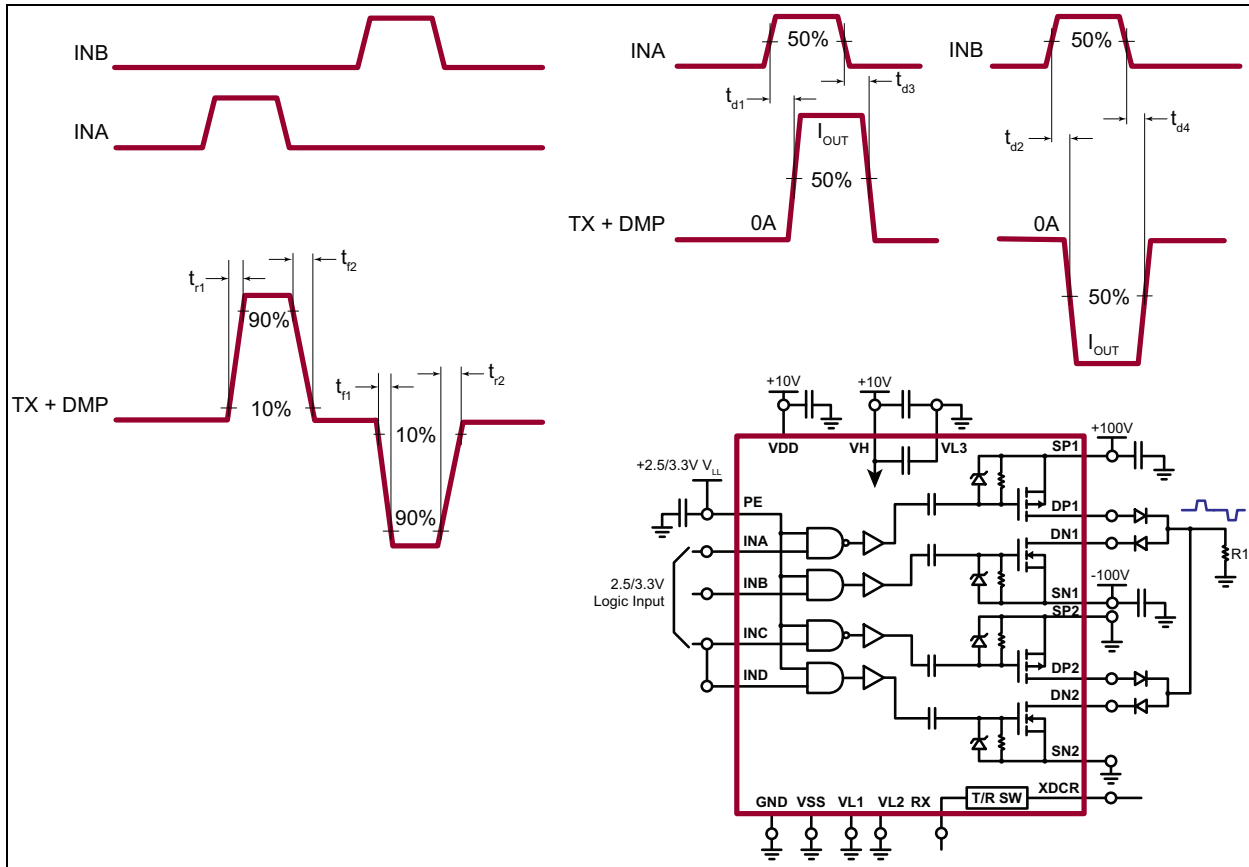


FIGURE 3-1: Pulser Timing Test for HV7360/HV7361.

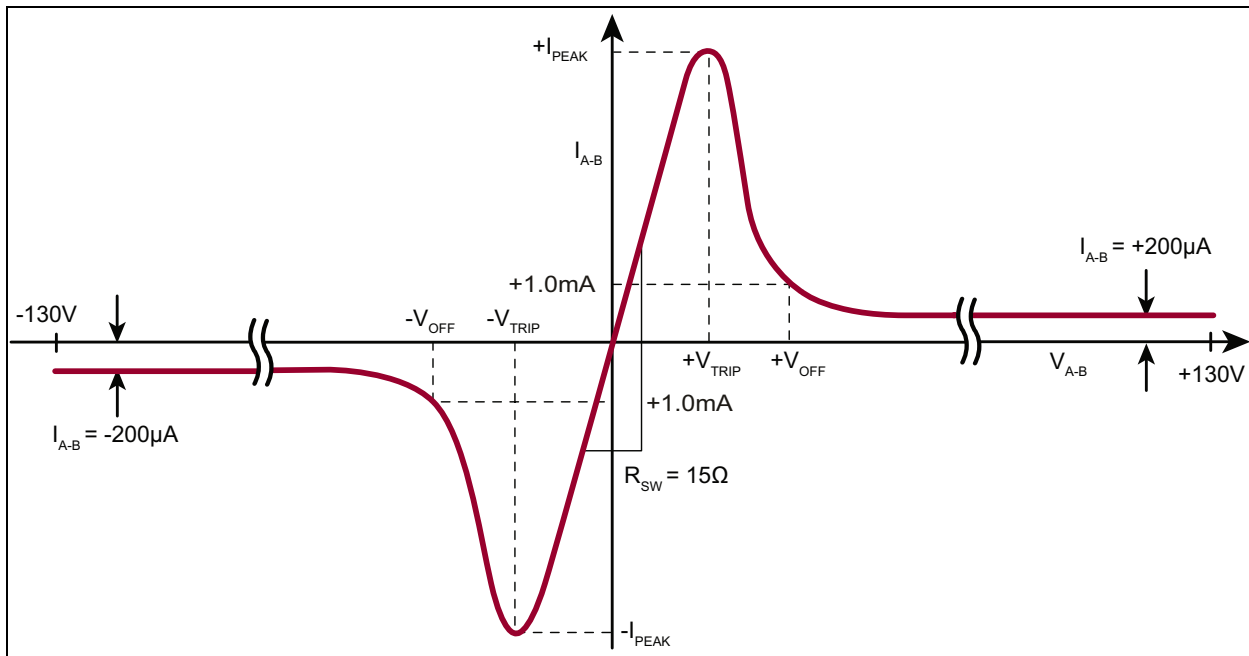


FIGURE 3-2: T/R Switch I-V curve for HV7361.

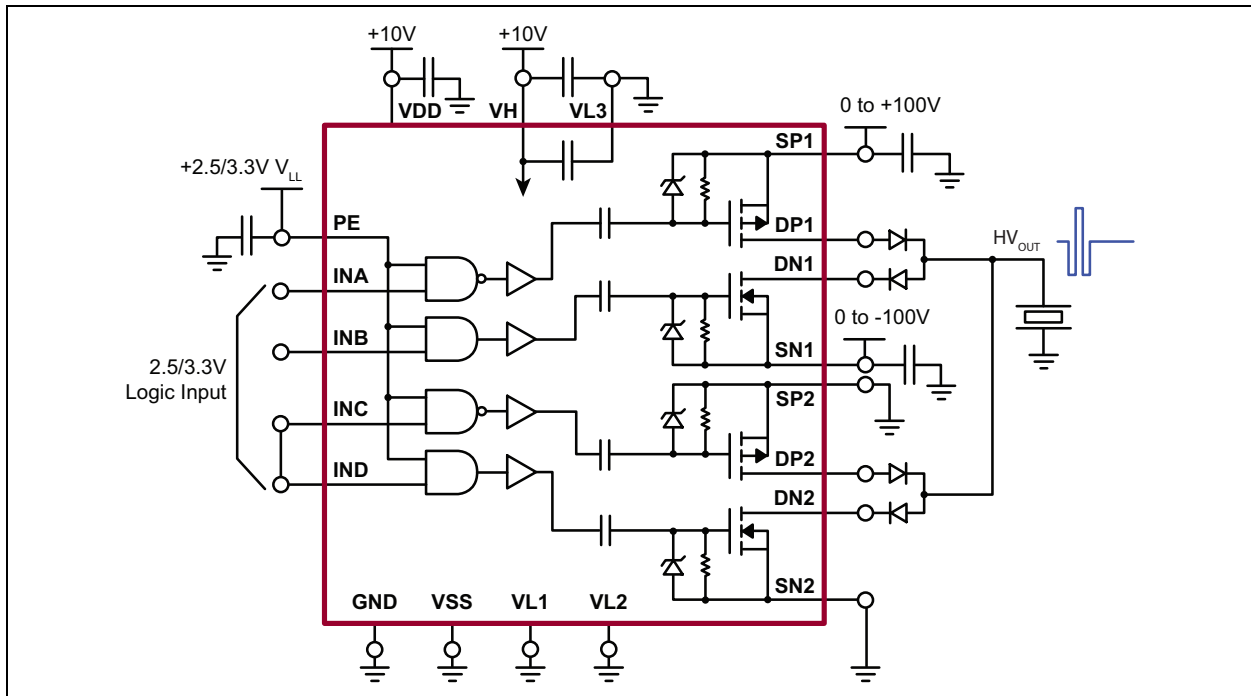


FIGURE 3-3: Typical Bipolar One-channel Three-level Ultrasound Transmitter Application Circuit for HV7360/HV7361.

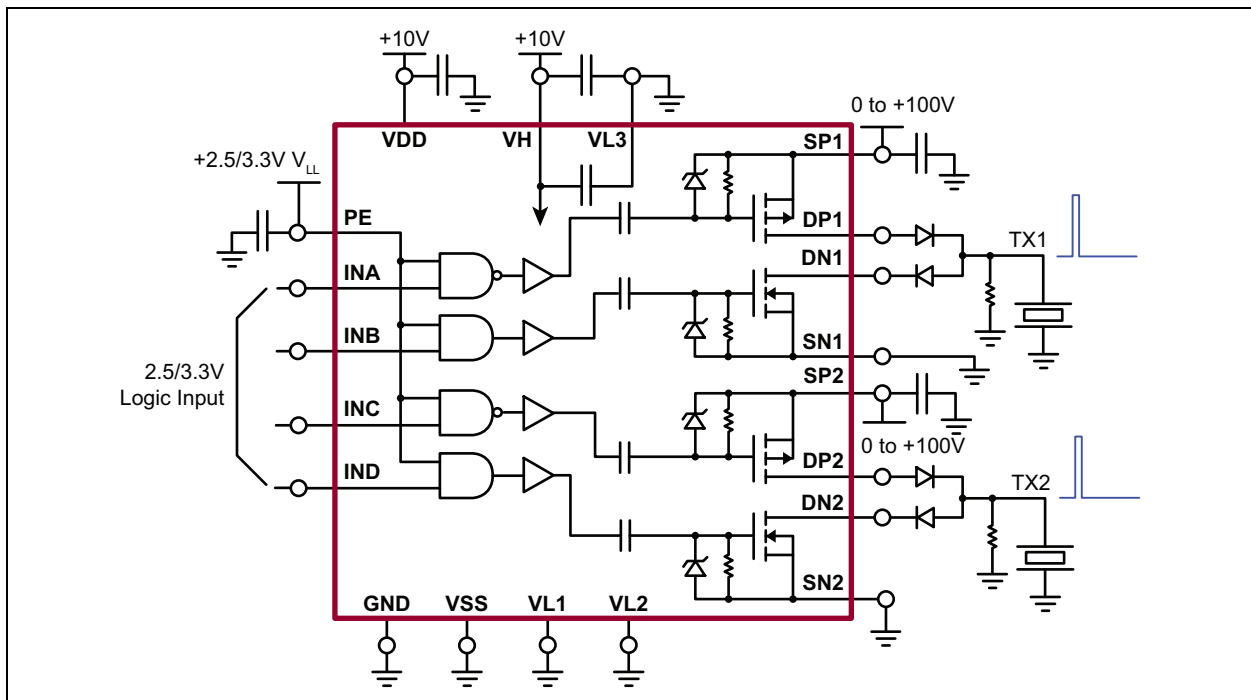


FIGURE 3-4: Typical Unipolar Two-channel Two-level Ultrasound Transmitter Application Circuit for HV7360/HV7361.

HV7360/HV7361

4.0 PACKAGING INFORMATION


4.1 Package Marking Information



Legend:	XX...X	Product Code or Customer-specific information
	Y	Year code (last digit of calendar year)
	YY	Year code (last 2 digits of calendar year)
	WW	Week code (week of January 1 is week '01')
	NNN	Alphanumeric traceability code
	^{e3}	Pb-free JEDEC [®] designator for Matte Tin (Sn)
	*	This package is Pb-free. The Pb-free JEDEC designator (^{e3}) can be found on the outer packaging for this package.
Note: In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for product code or customer-specific information. Package may or not include the corporate logo.		

22-Ball Chip Array Ball Grid Array (JY) - 5x7 mm Body [CABGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

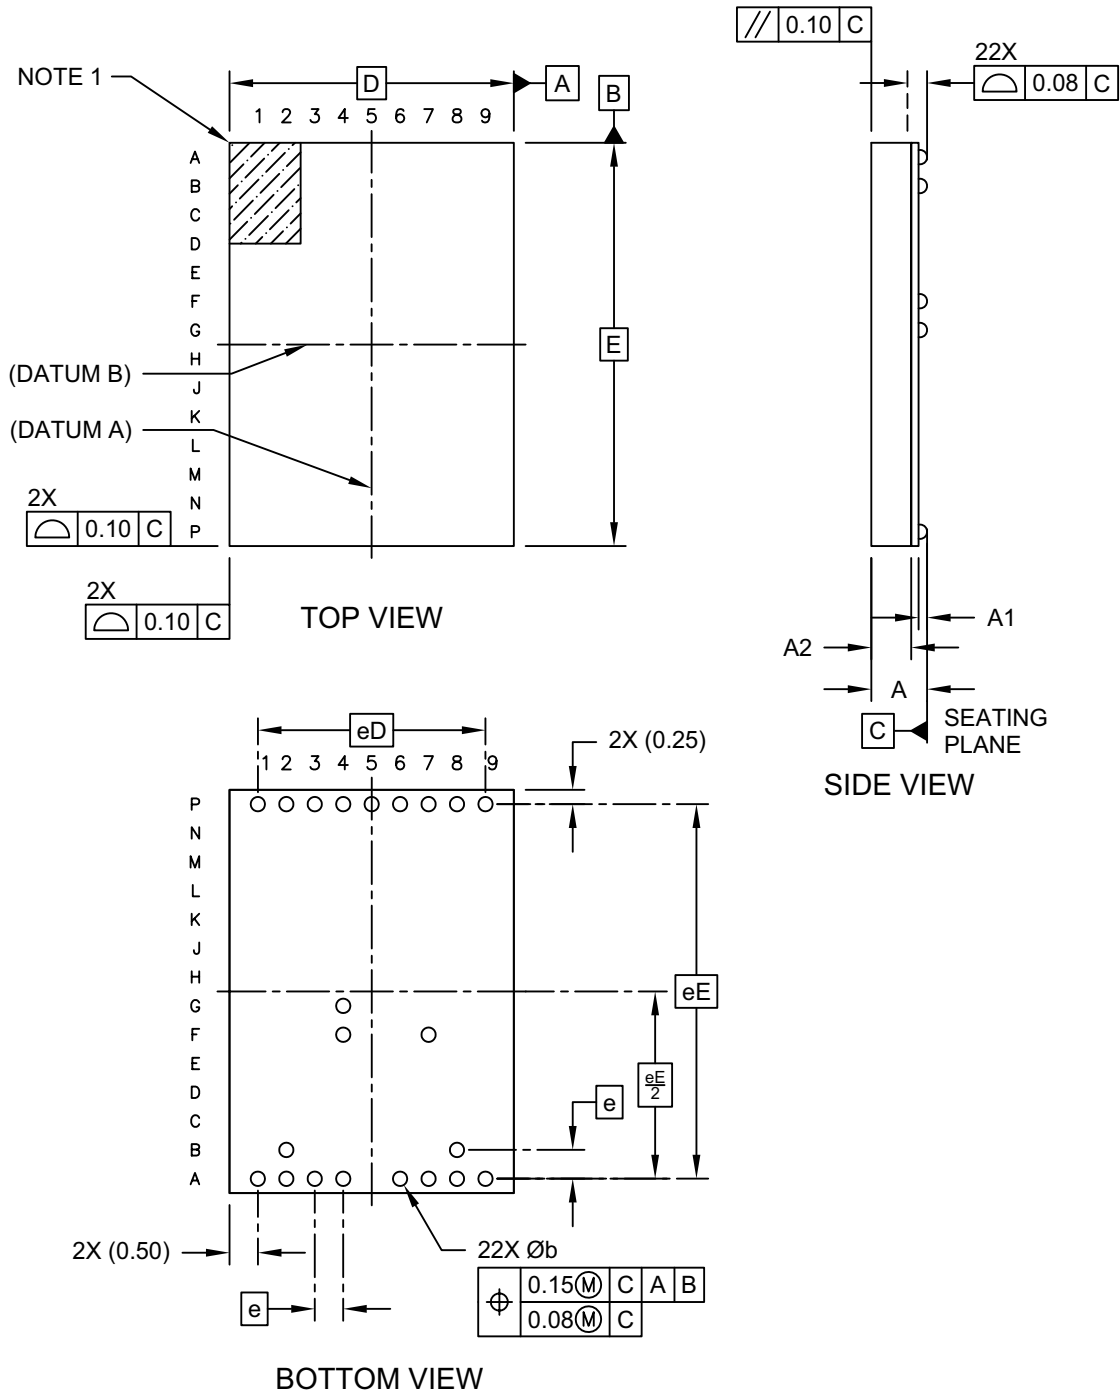


Microchip Technology Drawing C04-414A Sheet 1 of 2

HV7360/HV7361

22-Ball Chip Array Ball Grid Array (JY) - 5x7 mm Body [CABGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

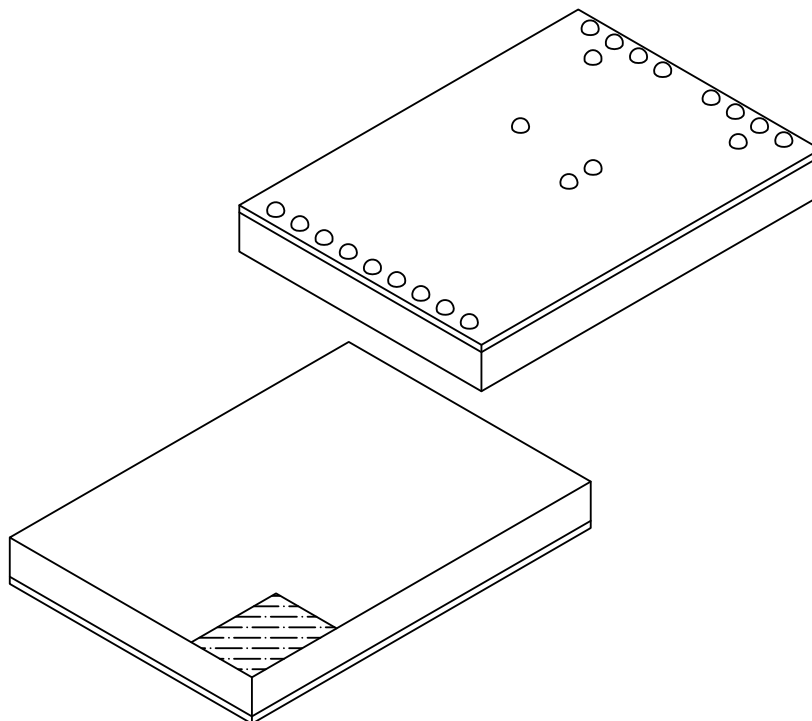

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	-	22		
Pitch	e	0.50 BSC		
Overall Height	A	0.91	0.98	1.05
Ball Height	A1	0.12	0.15	-
Package Thickness	A2	0.66	0.70	0.74
Overall Length	D	5.00 BSC		
Overall Terminal Pitch	eD	4.00 BSC		
Overall Width	E	7.00 BSC		
Overall Terminal Pitch	eE	6.50 BSC		
Ball Diameter	b	0.20	0.25	0.30

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-414A Sheet 2 of 2

HV7360/HV7361

NOTES:

APPENDIX A: REVISION HISTORY

Revision C (June 2017)

The following is the list of modifications:

- Updated the operating ambient temperature in Absolute Maximum Ratings † and in the Temperature Specifications table
- Made minor text changes throughout the document

Revision B (April 2017)

- Removed the INC to IND connection line and changed the typical high voltage supply from +200V to +100V in [Figure 3-4](#)
- Removed “HVCMOS® Technology for High Performance” from the Features Section
- Made minor text changes throughout the document

Revision A (June 2016)

- Converted Supertex Doc# DSFP-HV7360 and Supertex Doc# DSFP-HV7361 to Microchip DS20005570C
- Merged HV7360 and HV7361 into one document
- Replaced the 22-lead LFGA “LA” package with 22-lead CABGA “GA” package
- Made minor text changes throughout the document

HV7360/HV7361

PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, contact your local Microchip representative or sales office.

<u>PART NO.</u>					
Device			Package Options		
			Environmental		
			Media Type		
Devices:	HV7360	=	High-Voltage High-Speed Pulse Generator with Built-in Fast RTZ Damping FETs		
	HV7361	=	High-Voltage High-Speed Pulse Generator with Built-in Fast RTZ Damping FETs and an Integrated Two-Terminal Low-Noise T/R Switch		
Package:	GA	=	22-lead CABGA		
Environmental:	G	=	Lead (Pb)-free/RoHS-compliant Package		
Media Type:	(blank)	=	364/Tray for GA Package		

Examples:

a) HV7360GA-G: High-Voltage High-Speed Pulse Generator with Built-in Fast RTZ Damping FET, 22-lead CABGA Package, 364/Tray

b) HV7361GA-G: High-Voltage High-Speed Pulse Generator with Built-in Fast RTZ Damping FET and an Integrated Two-Terminal Low-Noise T/R Switch, 22-lead CABGA Package, 364/Tray

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.

QUALITY MANAGEMENT SYSTEM
CERTIFIED BY DNV
== ISO/TS 16949 ==

Trademarks

The Microchip name and logo, the Microchip logo, AnyRate, AVR, AVR logo, AVR Freaks, BeaconThings, BitCloud, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, Helder, JukeBlox, KEELOQ, KEELOQ logo, Klear, LANCheck, LINK MD, maxStylus, maxTouch, MediaLB, megaAVR, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, Prochip Designer, QTouch, RightTouch, SAM-BA, SpyNIC, SST, SST Logo, SuperFlash, tinyAVR, UNI/O, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

ClockWorks, The Embedded Control Solutions Company, EtherSynch, Hyper Speed Control, HyperLight Load, IntelliMOS, mTouch, Precision Edge, and Quiet-Wire are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, BodyCom, chipKIT, chipKIT logo, CodeGuard, CryptoAuthentication, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, EtherGREEN, In-Circuit Serial Programming, ICSP, Inter-Chip Connectivity, JitterBlocker, KlearNet, KlearNet logo, Mindi, MiWi, motorBench, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICKit, PICtail, PureSilicon, QMatrix, RightTouch logo, REAL ICE, Ripple Blocker, SAM-ICE, Serial Quad I/O, SMART-I.S., SQI, SuperSwitcher, SuperSwitcher II, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2017, Microchip Technology Incorporated, All Rights Reserved.
ISBN: 978-1-5224-1804-7

Worldwide Sales and Service

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
<http://www.microchip.com/support>
Web Address:
www.microchip.com

Atlanta
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Austin, TX
Tel: 512-257-3370

Boston
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Dallas
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit
Novi, MI
Tel: 248-848-4000

Houston, TX
Tel: 281-894-5983

Indianapolis
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453
Tel: 317-536-2380

Los Angeles
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608
Tel: 951-273-7800

Raleigh, NC
Tel: 919-844-7510

New York, NY
Tel: 631-435-6000

San Jose, CA
Tel: 408-735-9110
Tel: 408-436-4270

Canada - Toronto
Tel: 905-695-1980
Fax: 905-695-2078

ASIA/PACIFIC

Asia Pacific Office
Suites 3707-14, 37th Floor
Tower 6, The Gateway
Harbour City, Kowloon

Hong Kong
Tel: 852-2943-5100
Fax: 852-2401-3431

Australia - Sydney
Tel: 61-2-9868-6733
Fax: 61-2-9868-6755

China - Beijing
Tel: 86-10-8569-7000
Fax: 86-10-8528-2104

China - Chengdu
Tel: 86-28-8665-5511
Fax: 86-28-8665-7889

China - Chongqing
Tel: 86-23-8980-9588
Fax: 86-23-8980-9500

China - Dongguan
Tel: 86-769-8702-9880

China - Guangzhou
Tel: 86-20-8755-8029

China - Hangzhou
Tel: 86-571-8792-8115
Fax: 86-571-8792-8116

China - Hong Kong SAR
Tel: 852-2943-5100
Fax: 852-2401-3431

China - Nanjing
Tel: 86-25-8473-2460
Fax: 86-25-8473-2470

China - Qingdao
Tel: 86-532-8502-7355
Fax: 86-532-8502-7205

China - Shanghai
Tel: 86-21-3326-8000
Fax: 86-21-3326-8021

China - Shenyang
Tel: 86-24-2334-2829
Fax: 86-24-2334-2393

China - Shenzhen
Tel: 86-755-8864-2200
Fax: 86-755-8203-1760

China - Wuhan
Tel: 86-27-5980-5300
Fax: 86-27-5980-5118

China - Xian
Tel: 86-29-8833-7252
Fax: 86-29-8833-7256

ASIA/PACIFIC

China - Xiamen
Tel: 86-592-2388138
Fax: 86-592-2388130

China - Zhuhai
Tel: 86-756-3210040
Fax: 86-756-3210049

India - Bangalore
Tel: 91-80-3090-4444
Fax: 91-80-3090-4123

India - New Delhi
Tel: 91-11-4160-8631
Fax: 91-11-4160-8632

India - Pune
Tel: 91-20-3019-1500

Japan - Osaka
Tel: 81-6-6152-7160
Fax: 81-6-6152-9310

Japan - Tokyo
Tel: 81-3-6880-3770
Fax: 81-3-6880-3771

Korea - Daegu
Tel: 82-53-744-4301
Fax: 82-53-744-4302

Korea - Seoul
Tel: 82-2-554-7200
Fax: 82-2-558-5932 or
82-2-558-5934

Malaysia - Kuala Lumpur
Tel: 60-3-6201-9857
Fax: 60-3-6201-9859

Malaysia - Penang
Tel: 60-4-227-8870
Fax: 60-4-227-4068

Philippines - Manila
Tel: 63-2-634-9065
Fax: 63-2-634-9069

Singapore
Tel: 65-6334-8870
Fax: 65-6334-8850

Taiwan - Hsin Chu
Tel: 886-3-5778-366
Fax: 886-3-5770-955

Taiwan - Kaohsiung
Tel: 886-7-213-7830

Taiwan - Taipei
Tel: 886-2-2508-8600
Fax: 886-2-2508-0102

Thailand - Bangkok
Tel: 66-2-694-1351
Fax: 66-2-694-1350

EUROPE

Austria - Wels
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4450-2828
Fax: 45-4485-2829

Finland - Espoo
Tel: 358-9-4520-820

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

France - Saint Cloud
Tel: 33-1-30-60-70-00

Germany - Garching
Tel: 49-8931-9700

Germany - Haan
Tel: 49-2129-3766400

Germany - Heilbronn
Tel: 49-7131-67-3636

Germany - Karlsruhe
Tel: 49-721-625370

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Germany - Rosenheim
Tel: 49-8031-354-560

Israel - Ra'anana
Tel: 972-9-744-7705

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Italy - Padova
Tel: 39-049-7625286

Netherlands - Drunen
Tel: 31-416-690399
Fax: 31-416-690340

Norway - Trondheim
Tel: 47-7289-7561

Poland - Warsaw
Tel: 48-22-3325737

Romania - Bucharest
Tel: 40-21-407-87-50

Spain - Madrid
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

Sweden - Gothenberg
Tel: 46-31-704-60-40

Sweden - Stockholm
Tel: 46-8-5090-4654

UK - Wokingham
Tel: 44-118-921-5800
Fax: 44-118-921-5820