

DATA SHEET

RM12/I


**RM, RM/I, RM/ILP cores and
accessories**

Supersedes data of September 2004

2008 Sep 01

CORE SETS**Effective core parameters**

SYMBOL	PARAMETER	VALUE	UNIT
$\Sigma(l/A)$	core factor (C1)	0.388	mm^{-1}
V_e	effective volume	8340	mm^3
l_e	effective length	56.6	mm
A_e	effective area	146	mm^2
$A_{\min}$	minimum area	125	mm^2
m	mass of set	≈ 46	g

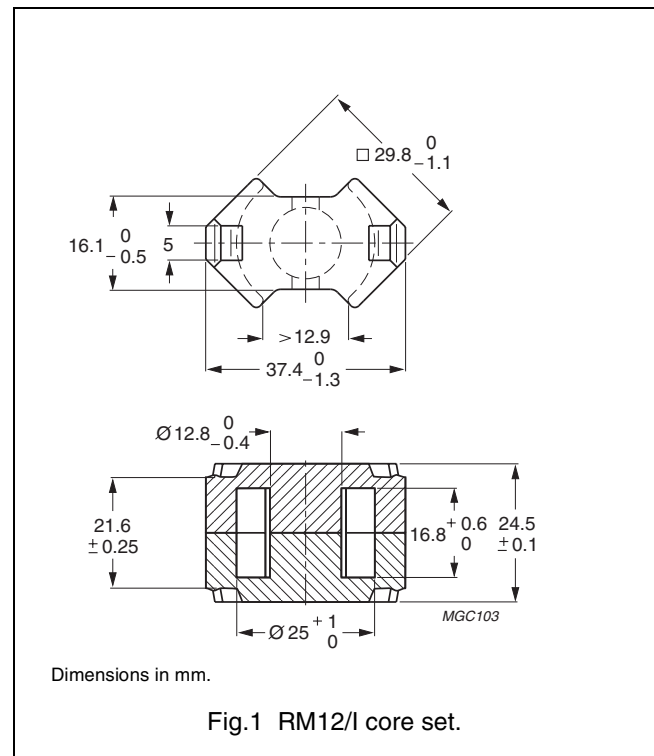**Core sets for general purpose transformers and power applications**Clamping force for A_L measurements, 70 ± 20 N.

GRADE	A_L (nH)	μ_e	AIR GAP (μm)	TYPE NUMBER
3C90	160 $\pm 3\%$	≈ 49	≈ 1570	RM12/I-3C90-A160
	250 $\pm 3\%$	≈ 77	≈ 900	RM12/I-3C90-A250
	315 $\pm 5\%$	≈ 97	≈ 680	RM12/I-3C90-A315
	400 $\pm 5\%$	≈ 123	≈ 510	RM12/I-3C90-A400
	630 $\pm 5\%$	≈ 194	≈ 300	RM12/I-3C90-A630
	5600 $\pm 25\%$	≈ 1730	≈ 0	RM12/I-3C90
3C94	160 $\pm 3\%$	≈ 49	≈ 1570	RM12/I-3C94-A160
	250 $\pm 3\%$	≈ 77	≈ 900	RM12/I-3C94-A250
	315 $\pm 5\%$	≈ 97	≈ 680	RM12/I-3C94-A315
	400 $\pm 5\%$	≈ 123	≈ 510	RM12/I-3C94-A400
	630 $\pm 5\%$	≈ 194	≈ 300	RM12/I-3C94-A630
	5600 $\pm 25\%$	≈ 1730	≈ 0	RM12/I-3C94
3C95 des	6790 $\pm 25\%$	≈ 2095	≈ 0	RM12/I-3C95
3C96 des	5050 $\pm 25\%$	≈ 1560	≈ 0	RM12/I-3C96

RM, RM/I, RM/ILP cores and accessories

RM12/I

GRADE	A_L (nH)	μ_e	AIR GAP (μm)	TYPE NUMBER
3F3	160 $\pm 3\%$	≈ 49	≈ 1570	RM12/I-3F3-A160
	250 $\pm 3\%$	≈ 77	≈ 900	RM12/I-3F3-A250
	315 $\pm 5\%$	≈ 97	≈ 680	RM12/I-3F3-A315
	400 $\pm 5\%$	≈ 123	≈ 510	RM12/I-3F3-A400
	630 $\pm 5\%$	≈ 194	≈ 300	RM12/I-3F3-A630
	5050 $\pm 25\%$	≈ 1560	≈ 0	RM12/I-3F3

Properties of core sets under power conditions

GRADE	B (mT) at	CORE LOSS (W) at					
	H = 250 A/m; f = 25 kHz; T = 100 °C	f = 25 kHz; B = 200 mT; T = 100 °C	f = 100 kHz; B = 100 mT; T = 100 °C	f = 100 kHz; B = 200 mT; T = 25 °C	f = 100 kHz; B = 200 mT; T = 100 °C	f = 400 kHz; B = 50 mT; T = 100 °C	f = 500 kHz; B = 50 mT; T = 100 °C
3C90	≥ 315	≤ 1.0	≤ 1.1	—	—	—	—
3C94	≥ 315	—	≤ 0.8	—	≤ 4.5	—	—
3C95	≥ 315	—	—	≤ 4.92	≤ 4.67	—	—
3C96	≥ 340	—	≤ 0.6	—	≤ 3.6	≤ 1.5	≤ 3.0
3F3	≥ 315	—	≤ 0.92	—	—	≤ 1.6	—

RM, RM/I, RM/ILP cores and accessories

RM12/I

COIL FORMER

General data

PARAMETER	SPECIFICATION
Coil former material	polybutyleneterephthalate (PBT), glass-reinforced, flame retardant in accordance with UL 94V-0; UL file number E45329(R)
Pin material	copper-tin alloy (CuSn), tin (Sn) plated
Maximum operating temperature	155 °C, "IEC 60085", class F
Resistance to soldering heat	"IEC 60068-2-20", Part 2, Test Tb, method 1B, 350 °C, 3.5 s
Solderability	"IEC 60068-2-20", Part 2, Test Ta, method 1

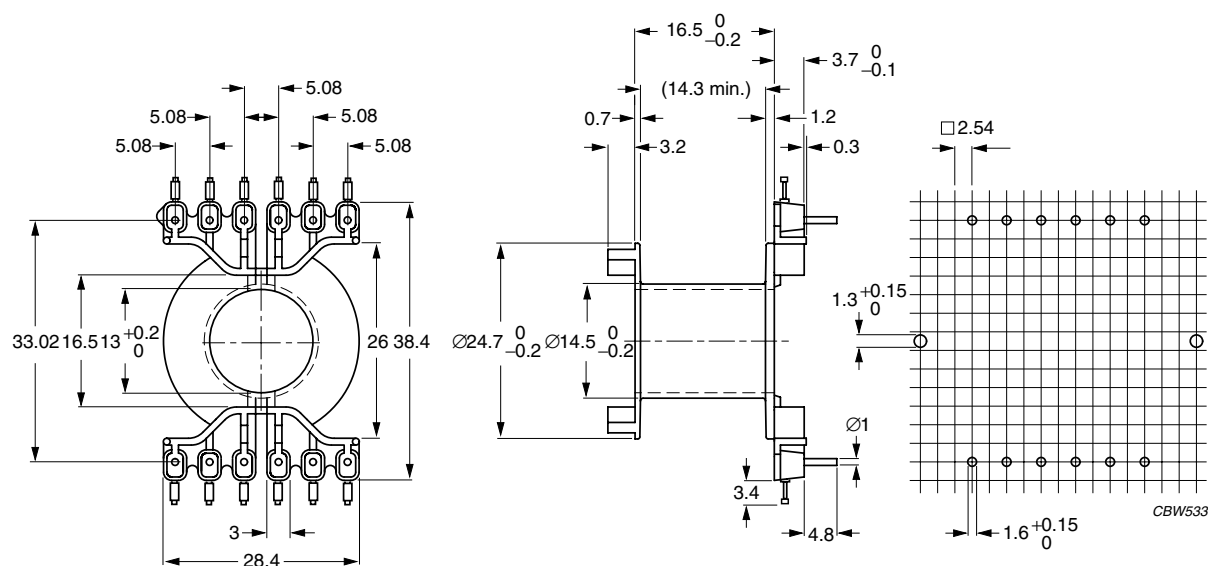



Fig.2 RM12/I coil former (DIL).

Winding data and area product for RM12/I coil former (DIL)

NUMBER OF SECTIONS	AVERAGE LENGTH OF TURN (mm)	WINDING AREA (mm ²)	WINDING WIDTH (mm)	AREA PRODUCT Ae x Aw (mm ⁴)	TYPE NUMBER
1	61	75.0	14.3	10950	CPV-RM12/I-1S-12PD

COIL FORMERS**General data**


PARAMETER	SPECIFICATION
Coil former material	phenolformaldehyde (PF), glass reinforced, flame retardant in accordance with "UL 94V-0"; UL file number E167521(M)
Pin material	copper-tin alloy (CuSn), tin (Sn) plated
Maximum operating temperature	180 °C, "IEC 60085", class H
Resistance to soldering heat	"IEC 60068-2-20", Part 2, Test Tb, method 1B, 350 °C, 3.5 s
Solderability	"IEC 60068-2-20", Part 2, Test Ta, method 1: 235 °C, 2 s

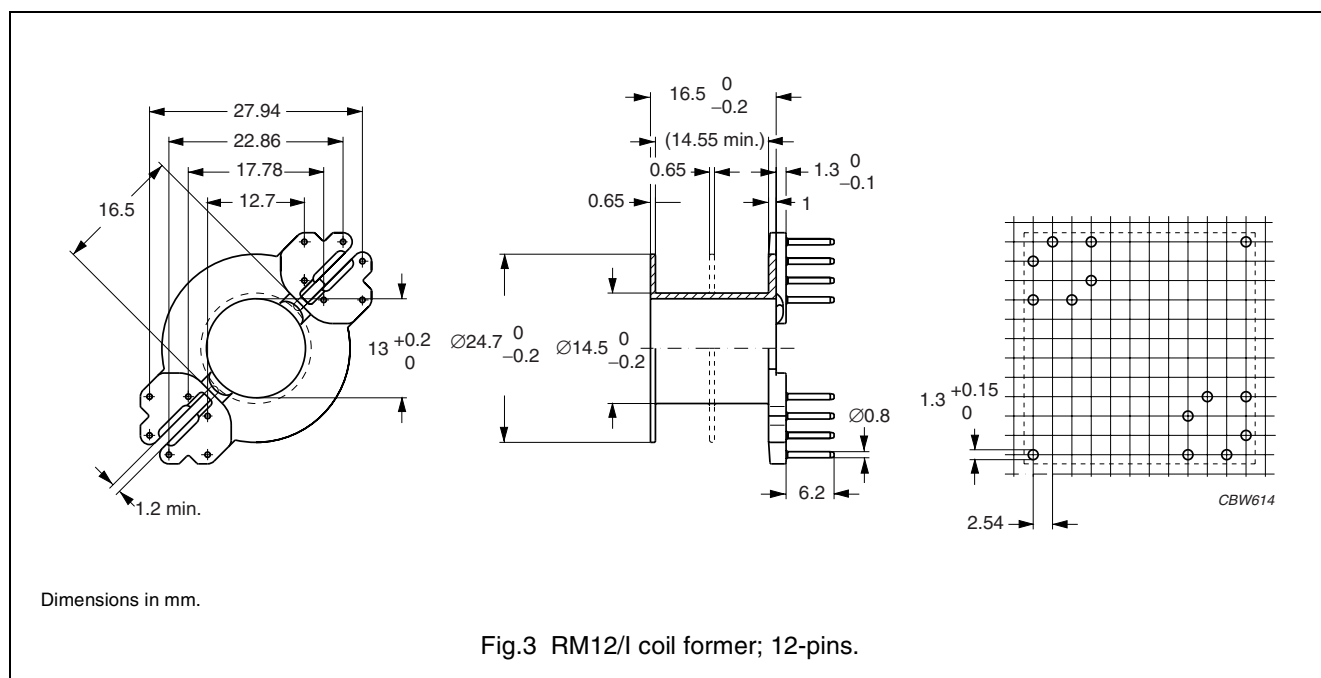**Winding data and area product for RM12/I coil former with 12-pins**

NUMBER OF SECTIONS	WINDING AREA (mm ²)	MINIMUM WINDING WIDTH (mm)	AVERAGE LENGTH OF TURN (mm)	AREA PRODUCT Ae x Aw (mm ⁴)	TYPE NUMBER
1	72.0	14.4	61	10500	CSV-RM12-1S-12P

MOUNTING PARTS**General data**

ITEM	SPECIFICATION
Clamping force	≈ 35 N
Clip material	stainless steel
Clip plating	tin (Sn)
Solderability	"IEC 60068-2-20", Part 2, Test Ta, method 1
Type number	CLI/P-RM12/I

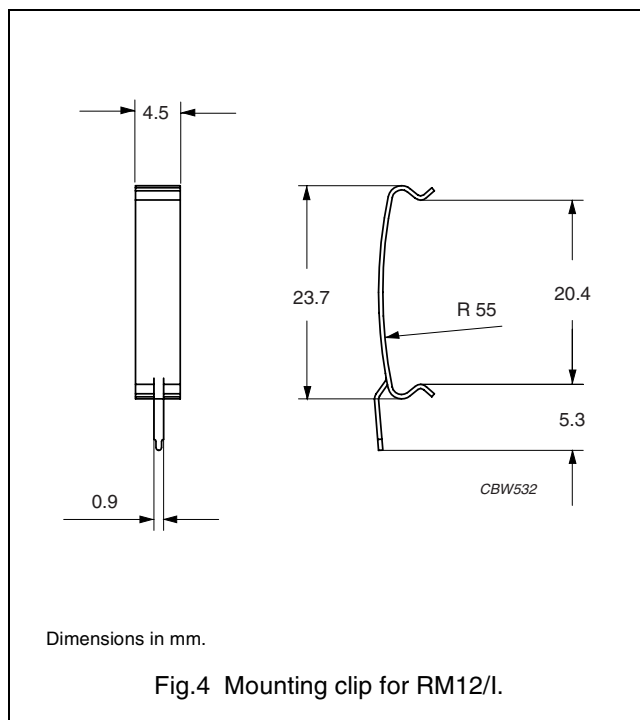

RM, RM/I, RM/ILP cores and accessories

RM12/I

DATA SHEET STATUS DEFINITIONS

DATA SHEET STATUS	PRODUCT STATUS	DEFINITIONS
Preliminary specification	Development	This data sheet contains preliminary data. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.
Product specification	Production	This data sheet contains final specifications. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.

DISCLAIMER

Life support applications — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Ferroxcube customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Ferroxcube for any damages resulting from such application.

PRODUCT STATUS DEFINITIONS

STATUS	INDICATION	DEFINITION
Prototype		These are products that have been made as development samples for the purposes of technical evaluation only. The data for these types is provisional and is subject to change.
Design-in		These products are recommended for new designs.
Preferred		These products are recommended for use in current designs and are available via our sales channels.
Support		These products are not recommended for new designs and may not be available through all of our sales channels. Customers are advised to check for availability.