
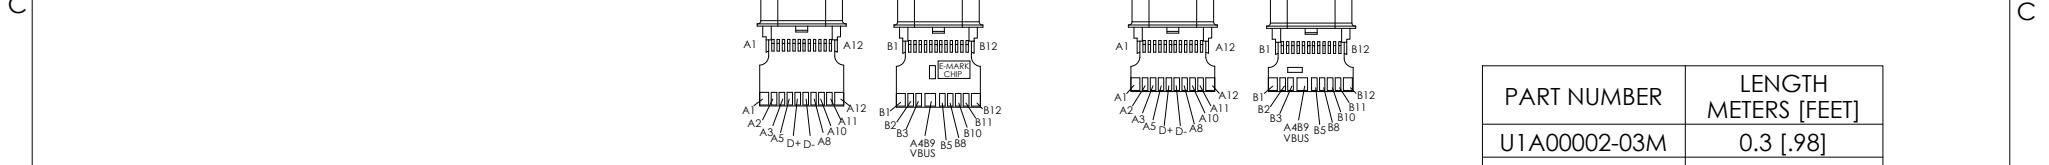



8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	05/18/18	S.LI

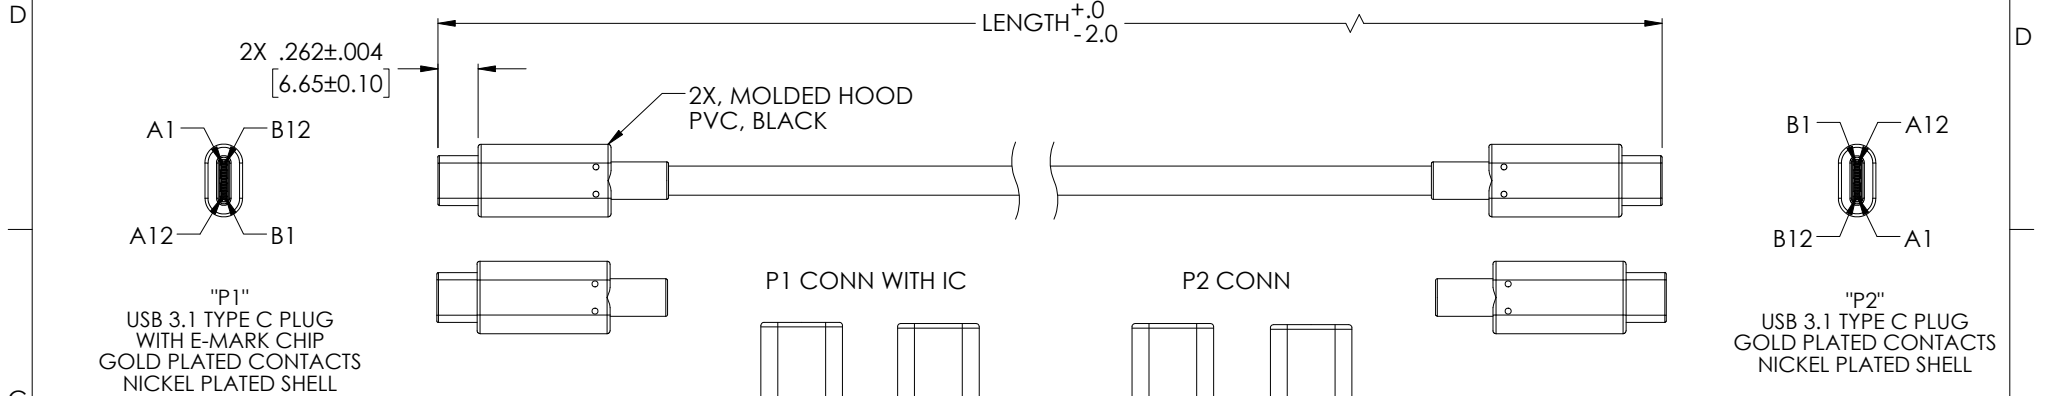

PART NUMBER	LENGTH METERS [FEET]
U1A00002-03M	0.3 [.98]
U1A00002-05M	0.5 [1.64]
U1A00002-1M	1.0 [3.28]

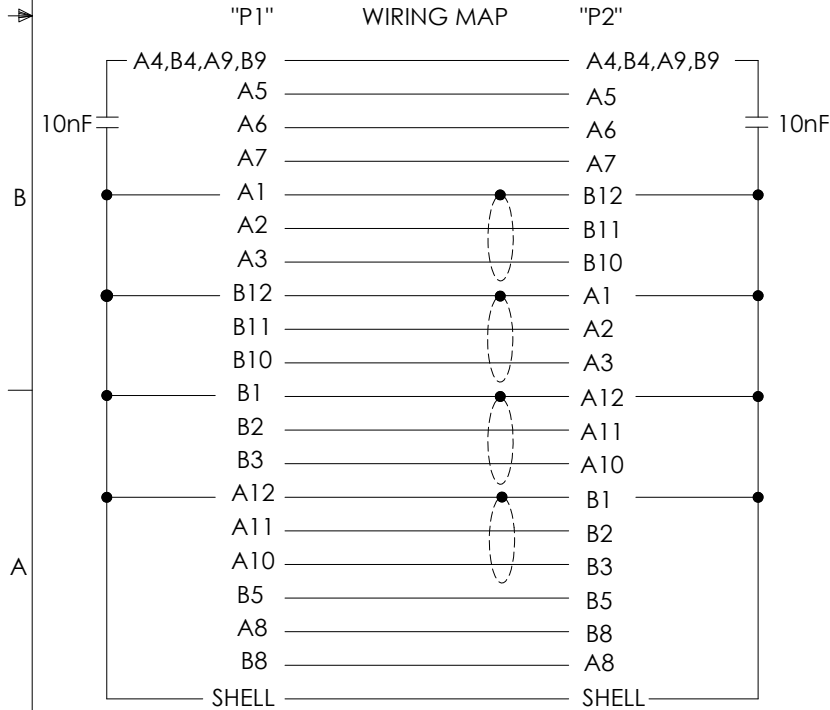


NOTES:

1. CABLE: [32AWG*1P+EAM]*4C+32AWG*1P+32AWG*4C+23AWG*1C]+2EAB,
OD: 4.8mm, BRAID:85%, JACKET: PVC, BLACK

2. ELECTRICAL TEST:
(1)- 100% OPEN SHORT & MISS WIRE TEST
(2)- HI-POT: 100V AC/0.1S
(2)- INSULATION: 10M OHM MIN. AT 100V DC
(3)- CONDUCTOR RESISTANCE: 3 OHM MAX.

PACKAGING:
CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE 2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [127]	APPROVALS	DATE	 50 HIGH STREET NORTH ANDOVER, MA 01845	
	DRAWN BY S.LI	05/18/18		
	CHECKED BY B.ZHANG	05/18/18	CATEGORY USB	
	APPROVED BY B.GATES	05/18/18	PRODUCT DESCRIPTION CA, USB 3.1 TYPE C GEN2 M/M 10Gbps	
PROJECTION 	COLOR VARIATIONS MAY OCCUR		SIZE A	FSCM NO. 43321
		SCALE: NONE	CAD FILE: U1A00002.SLDDRW	DWG. NO. U1A00002
		SHEET 1 OF 1		REV. A