



Features

- Used in DC-Link circuits as a replacement electrolytic capacitors
- Low ESR, High ripple current handling capabilities
- Self-healing.


Application

- Used in wind and solar power inverters
- EV or HEV Transportation
- Welders, Elevators, Motors Driver systems

Specifications

Reference Standard	: GB/T17702 (IEC 61071)
Climatic Category	: 40/85/56
Operating Temperature Range	: -40°C to +85°C
Capacitance Range	: 420μF
Capacitance Tolerance	: ±5%(J)
Test Voltage Between Terminals	: 1.5Un (10s, 20°C ±5°C)
Test Voltage Between Terminals and Case	: 1500V DC, 3000V AC (10s, 50Hz, 20°C ±5°C)
Rated Voltage	: 1100V DC
IR x CN	: 5000s (20°C, 500V DC, 1 min)
Max. Altitude	: 2000m
Install Bolts/Torque on the Bottom	: Aluminium Bolts (M12≤10N.m)
Leads to Electrical Extremes	: 2-M6×20 Bolt
Rated Frequency	: 50/60Hz
Life Expectancy	: 100,000hours at Un and θ _{hs} ≤ +70°C
Failure Rate	: 50FIT
Dielectric Material	: Metallized Polypropylene Film

Diagram

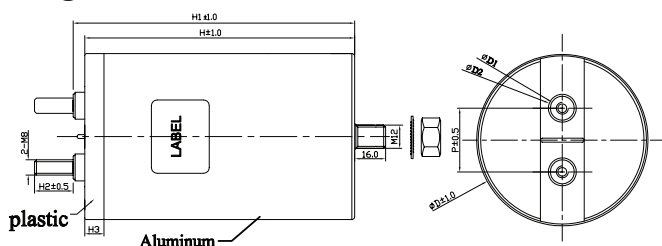

Additional Remark of Dimensions

D = 86mm	P=32mm; D1 =12mm; D2=14mm; H3=10mm or 45mm
----------	--

Dimension		
ØD	H	H1
86	155	161

Dimensions : Millimetres

Un (V DC)	Cn (μF)	ESR @1kHz (mΩ)	Ls (nH)	Rth (K/W)	Î (A)	Imax (A)		
						40°C	50°C	60°C
1100	420	1.7	40	4.4	3750	70	63	52

Part Number Table

Description	Part Number
DC-Link Film Capacitor, 420μF, 1100V DC, ±5%	MPDAT427K1K1VD86N6M

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/exclusive-brands
Farnell.com/exclusive-brands
Element14.com/exclusive-brands