

Net Weight	0.53 lb(US) (0.24 kg)
Maximum Width	3.99 in (101.3 mm)
Height	3.14 in (79.7 mm)
Depth	1.39 in (35.4 mm)
Device presentation	Complete product

Environment

Flame retardance	V0 UL 94
Ambient air temperature for operation	-40...176 °F (-40...80 °C)
Ambient air temperature for storage	-40...257 °F (-40...125 °C)
Pollution degree	2
Overvoltage category	III
Product certifications	CSA UL RoHS
Marking	CE
Standards	IEC 60950-1 IEC 62314 IEC 61000

Ordering and shipping details

Category	22375 - INTERFACE MODULE(ABA,R,S)
Discount Schedule	CP2
GTIN	00785901970941
Nbr. of units in pkg.	1
Package weight(Lbs)	0.91 lb(US) (0.41 kg)
Returnability	No
Country of origin	MX


Packing Units

Package 1 Height	0.400 dm
Package 1 width	0.850 dm
Package 1 Length	1.200 dm

Offer Sustainability


Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information

Dimensions

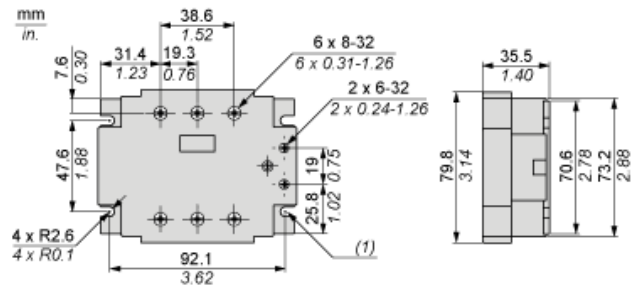

(1) 4 Mounting slots

Derating Curves

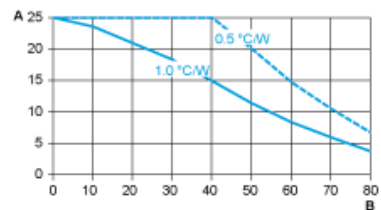

A : Load Current (Amperes)
B : Ambient Temperature (°C)