

ATS48D22Q

soft starter for asynchronous motor - ATS48 - 21 A - 230..415 V - 4..18.5 KW



Main

Range of product	Altistart 48
Product or component type	Soft starter
Product destination	Asynchronous motors
Product specific application	Heavy duty industry and pumps
Device short name	ATS48
[Us] rated supply voltage	230...415 V (- 15...10 %)
Motor power kW	7.5 kW at 230 V (connection to the motor delta terminals) for severe applications 7.5 kW at 400 V (connection in the motor supply line) for severe applications 9 kW at 230 V (connection to the motor delta terminals) for standard applications 11 kW at 400 V (connection in the motor supply line) for standard applications 15 kW at 400 V (connection to the motor delta terminals) for severe applications 18.5 kW at 400 V (connection to the motor delta terminals) for standard applications 4 kW at 230 V (connection in the motor supply line) for severe applications 5.5 kW at 230 V (connection in the motor supply line) for standard applications
Power dissipation in W	For severe applications 59 W For standard applications 74 W
Utilisation category	AC-53A
Type of start	Start with torque control (current limited to 5 In)
IcL starter rating	22 A (connection in the motor supply line) for severe applications 22 A (connection in the motor supply line) for standard applications 38 A (connection to the motor delta terminals) for severe applications 38 A (connection to the motor delta terminals) for standard applications
IP degree of protection	IP20

Complementary

Assembly style	With heat sink
Function available	External bypass (optional)
Supply voltage limits	195...456 V
Supply frequency	50...60 Hz (- 5...5 %)
Network frequency	47.5...63 Hz
Device connection	In the motor supply line To the motor delta terminals
Factory setting current	21 A
[Uc] control circuit voltage	220 - 15 % to 415 + 10 %, 50/60 Hz
Control circuit consumption	30 W
Discrete output number	2
Discrete output type	(LO1) logic output 0 V common configurable (LO2) logic output 0 V common configurable (R1) relay outputs fault relay NO (R2) relay outputs end of starting relay NO (R3) relay outputs motor powered NO
Output absolute accuracy precision	+/- 5 %
Minimum switching current	Relay outputs 10 mA at 6 V DC
Maximum switching current	Logic output 0.2 A at 30 V DC

Relay outputs 1.8 A at 230 V AC inductive load, $\cos \phi = 0.5$, $L/R = 20$ ms
 Relay outputs 1.8 A at 30 V DC inductive load, $\cos \phi = 0.5$, $L/R = 20$ ms

Discrete input number	5
Discrete input type	PTC, 750 Ohm at 25 °C (Stop, Run, LI3, LI4) logic, ≤ 8 mA 4300 Ohm
Discrete input voltage	24 V (≤ 30 V)
Discrete input logic	Positive logic (Stop, Run, LI3, LI4) state 0 < 5 V and ≤ 2 mA, state 1 > 11 V and ≥ 5 mA
Supply inrush current	Adjustable 0.4...1.3 Icl
Analogue output type	(AO) current output 0-20 mA or 4-20 mA ≤ 500 Ohm
Communication port protocol	Modbus
Connector type	1 RJ45
Communication data link	Serial
Physical interface	RS485 multidrop
Transmission rate	4800, 9600 or 19200 bps
Installed device	31
Protection type	Phase failure (line) Thermal protection (motor) Thermal protection (starter)
Marking	CE
Type of cooling	Natural convection
Operating position	Vertical ± 10 degree
Height	275 mm
Width	160 mm
Depth	190 mm
Product weight	4.9 kg
Power range	7...11 kW at 380...440 V 3 phases 4...6 kW at 200...240 V 3 phases 7...11 kW at 200...240 V 3 phases 15...25 kW at 380...440 V 3 phases
Motor starter type	Soft starter


Environment

electromagnetic compatibility	Conducted and radiated emissions conforming to IEC 60947-4-2 level A Conducted and radiated emissions conforming to IEC 60947-4-2 level B Damped oscillating waves conforming to IEC 61000-4-12 level 3 Electrostatic discharge conforming to IEC 61000-4-2 level 3 Immunity to electrical transients conforming to IEC 61000-4-4 level 4 Immunity to radiated radio-electrical interference conforming to IEC 61000-4-3 level 3 Voltage/current impulse conforming to IEC 61000-4-5 level 3
standards	EN/IEC 60947-4-2
product certifications	CCC CSA C-Tick DNV GOST NOM 117 SEPRO TCF UL
vibration resistance	1 gn ($f = 13...200$ Hz) conforming to EN/IEC 60068-2-6 1.5 mm ($f = 2...13$ Hz) conforming to EN/IEC 60068-2-6
shock resistance	15 gn for 11 ms conforming to EN/IEC 60068-2-27
pollution degree	Level 3 conforming to IEC 60664-1
relative humidity	0...95 % without condensation or dripping water conforming to EN/IEC 60068-2-3
ambient air temperature for operation	-10...40 °C without derating -10...40 °C without derating 40...60 °C with current derating of 2 % per °C
ambient air temperature for storage	-25...70 °C
operating altitude	≤ 1000 m without derating $> 1000...2000$ m with current derating of 2.2 % per additional 100 m

Contractual warranty

Warranty period	18 months
-----------------	-----------

Dimensions

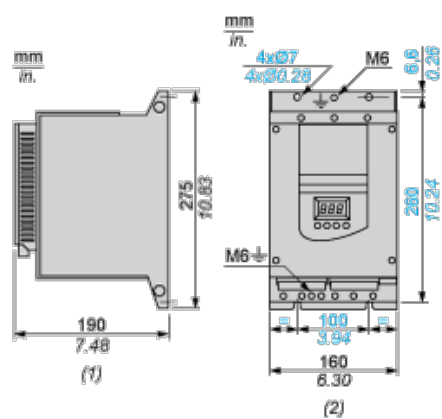

(1) Right View

(2) Front View

Clearance

