XUVK0252VS

photoelectric sensor - thru-beam - Sn 2 mm - NO or NC - M8 connector



Main

Range of product	OsiSense XU
Series name	Application packaging
Electronic sensor type	Photo-electric sensor
Sensor name	XUV
Sensor design	Fork
Detection system	Thru beam
Emission	Red or green
Type of setting	Without
Passage width	0.08 in (2 mm)
Passage depth	1.97 in (50 mm)
Material	Metal
Supply circuit type	DC
Wiring technique	3-wire
Discrete output type	PNP and NPN
Discrete output function	2 NO/NC programmable
Electrical connection	1 male connector M8 adjustable through 90°, 4 pins
Product specific application	Detection of labels
[Sn] nominal sensing distance	0.08 in (2 mm)

Complementary

Complementary	
Setting-up	Teach mode
Enclosure material	Zinc alloy
Lens material	Glass
Type of output signal	Discrete
Output type	Solid state
Status LED	Sensor ready 1 LED green) Read error 1 LED red) Output state 1 LED yellow)
[Us] rated supply voltage	1224 V DC with reverse polarity protection
Supply voltage limits	1030 V DC
Switching capacity in mA	<= 100 mA overload and short-circuit protection)
Switching frequency	<= 25 kHz
Maximum voltage drop	<1.5 V closed state)
Output clamping resistor	10 kOhm
Current consumption	<= 50 mA no-load
Maximum delay first up	30 ms
Maximum delay response	0.1 ms
Maximum delay recovery	0.1 ms
Depth	3.54 in (90 mm)
Height	0.79 in (20 mm)
Maximum Width	0.79 in (20 mm)
Net Weight	0.19 lb(US) (0.085 kg)

Environment

Product certifications	CE	
Ambient air temperature for operation	32131 °F (055 °C)	
Ambient air temperature for storage	-4158 °F (-2070 °C)	
Vibration resistance	7 gn +/- 1.5 mm 1055 Hz) IEC 60068-2-6	
Shock resistance	30 gn 11 ms) IEC 60068-2-27	
IP degree of protection	IP65 conforming to IEC 60529	

Ordering and shipping details

Category	22481 - SENSORS, PHOTOELECTRIC
Discount Schedule	DS2
GTIN	00785901654186
Nbr. of units in pkg.	1
Package weight(Lbs)	0.29 lb(US) (0.13 kg)
Returnability	No
Country of origin	HU

Packing Units

r doking office	
Unit Type of Package 1	PCE
Package 1 Height	1.42 in (3.6 cm)
Package 1 width	3.15 in (8 cm)
Package 1 Length	3.35 in (8.5 cm)
Unit Type of Package 2	S02
Number of Units in Package 2	45
Package 2 Weight	14.16 lb(US) (6.421 kg)
Package 2 Height	5.91 in (15 cm)
Package 2 width	11.81 in (30 cm)
Package 2 Length	15.75 in (40 cm)

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACh Regulation	☑ REACh Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	₹Yes


Contractual warranty

Warranty	18 months

XUVK0252VS

Dimensions

M8 Connector Adjustable Through 90°

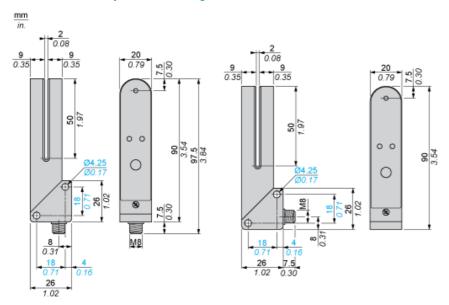


Product data sheet Connections and Schema

XUVK0252VS

Connector Scheme

3-wire, PNP and NPN

NO or NC Programmable Function



2: NPN Output

FNP Output