



### Main

|                           |                                                                               |
|---------------------------|-------------------------------------------------------------------------------|
| Range of product          | Harmony XVR                                                                   |
| Product or component type | Prewired rotating mirror beacon                                               |
| Sound signalling          | Without                                                                       |
| Device short name         | XVR                                                                           |
| Mounting diameter         | 106 mm                                                                        |
| IP degree of protection   | IP23 conforming to IEC 60529<br>IP55 (with accessory) conforming to IEC 60529 |
| [Us] rated supply voltage | 12 V AC/DC                                                                    |
| Light source              | High luminosity LED, orange                                                   |

### Complementary

|                                        |                                                                                             |
|----------------------------------------|---------------------------------------------------------------------------------------------|
| Material                               | ABS (acrylonitrile butadiene-styrene) (body part)<br>PMMA (polymethyl methacrylate) (globe) |
| CAD overall width                      | 106 mm                                                                                      |
| CAD overall depth                      | 106 mm                                                                                      |
| Product weight                         | 0.5 kg                                                                                      |
| Marking                                | CE                                                                                          |
| Product mounting                       | By 3 M4 screws                                                                              |
| Supply voltage limits                  | 10...15 V DC<br>10.8...13.2 V AC                                                            |
| [Uimp] rated impulse withstand voltage | 0.8 kV                                                                                      |
| Current consumption                    | 250 mA                                                                                      |
| Flashing frequency                     | 2.3 Hz                                                                                      |
| Clamping connection capacity           | 0.83 mm <sup>2</sup>                                                                        |
| AWG gauge                              | AWG 18                                                                                      |
| Cable length                           | 400 mm                                                                                      |

### Environment

|                                       |                                  |
|---------------------------------------|----------------------------------|
| standards                             | EN 61000-6-2<br>EN 61000-6-4     |
| product certifications                | UL                               |
| protective treatment                  | TC                               |
| ambient air temperature for storage   | -35...70 °C                      |
| ambient air temperature for operation | -10...50 °C                      |
| electrical shock protection class     | Class II conforming to IEC 61140 |

### Offer Sustainability


|                                  |                                                                       |
|----------------------------------|-----------------------------------------------------------------------|
| Sustainable offer status         | Green Premium product                                                 |
| RoHS (date code: YYWW)           | Compliant - since 1611 - Schneider Electric declaration of conformity |
| REACH                            | Reference not containing SVHC above the threshold                     |
| Product environmental profile    | Available                                                             |
| Product end of life instructions | Available                                                             |

### Contractual warranty

|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

## Rotating Mirror Beacon

### Dimensions

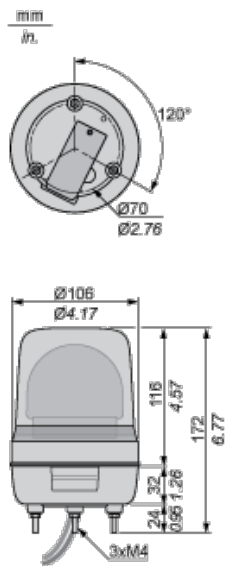

## Rotating Mirror Beacon

### Panel Cut-out

