

XVUC29P

Illuminated LED unit for modular tower lights, multi-color, Ø60, steady/blinking/flashing/rotating, pulse signal, IP65, 24 V AC/DC



Main

| | |
|------------------------------------|-------------------------------|
| Range of product | Harmony XVU |
| Product or component type | Modular tower light |
| Beacon or indicator bank unit type | LED unit |
| Mounting diameter | 2.36 in (60 mm) |
| Component name | XVU |
| Light source | LED, multi-colour |
| Light source colour | Green Blue Red Amber |
| Device application | Automotive |

Complementary

| | |
|--------------------------------|--|
| Signalling type | Rotating Blinking Flashing Steady |
| Assembly style | Customer assembly, up to 4 units |
| Material | PC (polycarbonate) V-2 conforming to UL 94 |
| [Us] rated supply voltage | 24 V DC |
| Maximum power dissipation in W | 1.7 W |
| Current consumption | <= 70 mA |
| Functionality | Pulse signal |
| Signalling type | Steady/blinking/flashing/rotating |
| Length | 1.97 in (50 mm) |
| Net Weight | 0.15 lb(US) (0.069 kg) |

Environment

| | |
|---------------------------------------|----------------------------|
| Product certifications | CSA UL RoHS CE |
| Ambient air temperature for storage | -40...158 °F (-40...70 °C) |
| IP degree of protection | IP65 |
| Ambient air temperature for operation | -13...122 °F (-25...50 °C) |
| Vibration resistance | 2 gn |

Ordering and shipping details

| | |
|-----------------------|--------------------------|
| Category | 22618 - XVU TOWER LIGHTS |
| Discount Schedule | XV |
| GTIN | 00785901317074 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 0.3 lb(US) (0.14 kg) |
| Returnability | No |
| Country of origin | ID |

Packing Units

| | |
|------------------|----------|
| Package 1 Height | 0.930 dm |
| Package 1 width | 0.920 dm |
| Package 1 Length | 1.300 dm |


Offer Sustainability

| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS Declaration |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End Of Life Information |


Illuminated LED Unit

Dimensions

$\frac{\text{mm}}{\text{in.}}$




Modular Tower Lights Mounting

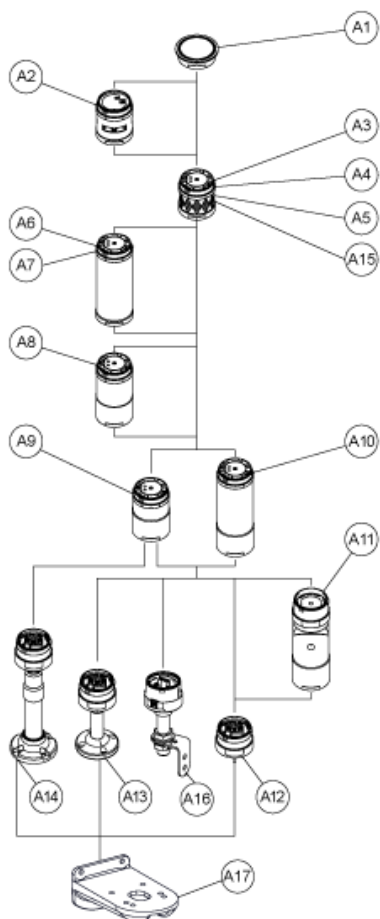

| Drawing | Part number | Part name |
|----------|----------------------|------------------------------|
| A1 | - | Top cover |
| - | Top cover (Silver) | |
| A2 | XVUC9S | Buzzer unit |
| XVUC9SQ | Buzzer unit (Silver) | |
| A3 | XVUC23 | Green LED unit |
| XVUC24 | Red LED unit | |
| XVUC25 | Orange LED unit | |
| XVUC26 | Blue LED unit | |
| XVUC27 | White LED unit | |
| XVUC28 | Yellow LED unit | |
| A4 | XVUC29 | Multi-LED unit |
| A5 | XVUC29P | Multi-LED unit, Pulse signal |
| A6 | XVUC9V | Sound unit |
| A7 | XVUC9VP | Sound unit, Pulse signal |
| A8 | XVUC020 | Extender |
| XVUC020Q | Extender (Silver) | |
| A9 | XVUC21B | DC body |

| Drawing | Part number | Part name |
|-----------|--|---|
| XVUC21BQ | DC body (Silver) | |
| A10 | XVUC21M | AC body NPN |
| XVUC21MP | AC body PNP | |
| XVUC21MQP | AC body PNP (Silver) | |
| A11 | XVUZ06 | Flexible option |
| A12 | XVUZ01 | Fixing Unit - Direct mounting (3 pins) |
| XVUZ01Q | Fixing Unit - Direct mounting (Silver,3 pins) | |
| XVUZ03 | Fixing Unit - Direct mounting (2 pins) | |
| XVUZ04 | Fixing Unit - Direct mounting (4 pins) | |
| A13 | XVUZ02 | Fixing Unit - Plate with Pole (100 mm) |
| XVUZ02Q | Fixing Unit - Plate with Pole (100 mm, Silver) | |
| XVUZ400 | Fixing Unit - Plate with Pole (400 mm) | |
| XVUZ800 | Fixing Unit - Plate with Pole (800 mm) | |
| A14 | XVUZ05 | Fixing Unit - Plate with adjustment pole (100-385 mm) |
| A15 | XVUC43 | Green LED unit, Flash |
| XVUC44 | Red LED unit, Flash | |
| XVUC45 | Orange LED unit, Flash | |
| XVUC46 | Blue LED unit, Flash | |
| XVUC47 | White LED unit, Flash | |
| XVUC48 | Yellow LED unit, Flash | |
| A16 | XVUZ100T | Fixing Unit - Metal bracket with pole (100 mm) |
| XVUZ250T | Fixing Unit - Metal bracket with pole(250 mm) | |
| XVUZ400T | Fixing Unit - Metal bracket with pole (400 mm) | |
| A17 | XVUZ12 | Fixing plate for use on vertical support - black |

Illuminated Units, Multi-LED and Audible Units Wiring

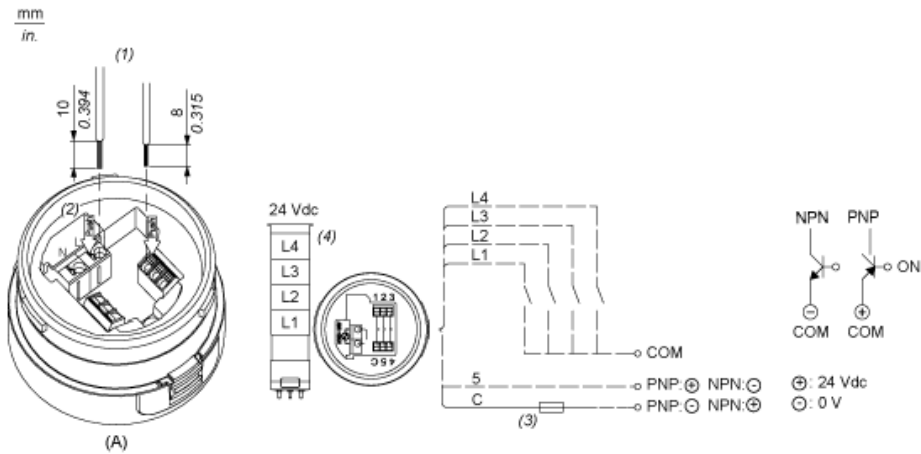

- (A) Fixing Unit
- (1) Dimensions of Wiring size
- (2) Push-in Wire Connectors
- (3) Fuse : 0.5A , 125V
- (4) Modular Tower Lights 24 VDC
- (5) 5: Power supply, 24VDC (PNP application) or GND (NPN application)
- (6) C: Power supply, 24VDC (NPN application) or GND (PNP application)
- L1 to Illuminated LED Units
- L4 :