XVUZ01Q

Fixing unit for modular tower lights, silver, Ø60, 3 pins direct mounting





Main

Range of product	Harmony XVU
Product or component type	Modular tower light
Accessory / separate part type	Mounting plate
Accessory / separate part category	Mounting and fixing accessory
Component name	XVU
Mounting diameter	2.36 in (60 mm)

Complementary

3	
Direct mounting	
Top AC body Top DC body Top swivel mounting support	
PBT (polybutylene terephthalate) V-0 UL 94 ABS (acrylonitrile butadiene-styrene) PC (polycarbonate)	
Silver	
Push-in	
24 V AC/DC 110240 V AC	
0.67 in (17 mm)	
0.14 lb(US) (0.063 kg)	
	Direct mounting Top AC body Top DC body Top swivel mounting support PBT (polybutylene terephthalate) V-0 UL 94 ABS (acrylonitrile butadiene-styrene) PC (polycarbonate) Silver Push-in 24 V AC/DC 110240 V AC 0.67 in (17 mm)

Environment

Ambient air temperature for storage	-40158 °F (-4070 °C)
Ambient air temperature for operation	-13122 °F (-2550 °C)
IP degree of protection	IP65
Product certifications	UL CSA CE

Ordering and shipping details

Discount Schedule XV GTIN 00785901158943 Nbr. of units in pkg. 1 Package weight(Lbs) 0.33 lb(US) (0.15 kg) Returnability No Country of origin ID	Category	22618 - XVU TOWER LIGHTS	
Nbr. of units in pkg. 1 Package weight(Lbs) 0.33 lb(US) (0.15 kg) Returnability No	Discount Schedule	XV	
Package weight(Lbs) 0.33 lb(US) (0.15 kg) Returnability No	GTIN	00785901158943	
Returnability No	Nbr. of units in pkg.	1	
	Package weight(Lbs)	0.33 lb(US) (0.15 kg)	
Country of origin ID	Returnability	No	
Country of origin	Country of origin	ID	

Packing Units

3	
Unit Type of Package 1	PCE
Package 1 Height	3.54 in (9 cm)
Package 1 width	3.58 in (9.1 cm)
Package 1 Length	5.24 in (13.3 cm)
Unit Type of Package 2	S03
Number of Units in Package 2	24
Package 2 Weight	9.61 lb(US) (4.359 kg)
Package 2 Height	11.81 in (30 cm)
Package 2 width	11.81 in (30 cm)
Package 2 Length	15.75 in (40 cm)

Offer Sustainability


Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACh Regulation	REACh Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
RoHS exemption information	₫Yes
China RoHS Regulation	☐ China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information

Product data sheet Dimensions Drawings

XVUZ01Q


Fixing Unit

Dimensions



XVUZ01Q


Modular Tower Lights Mounting

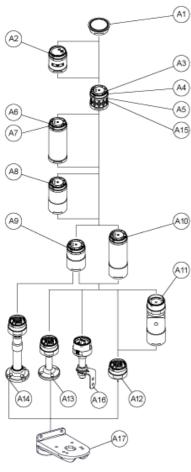

Drawing	Part number	Part name
A1	-	Top cover
-	Top cover (Silver)	
A2	XVUC9S	Buzzer unit
XVUC9SQ	Buzzer unit (Silver)	
A3	XVUC23	Green LED unit
XVUC24	Red LED unit	
XVUC25	Orange LED unit	
XVUC26	Blue LED unit	
XVUC27	White LED unit	
XVUC28	Yellow LED unit	
A4	XVUC29	Multi-LED unit
A5	XVUC29P	Multi-LED unit, Pulse signal
A6	XVUC9V	Sound unit
A7	XVUC9VP	Sound unit, Pulse signal
A8	XVUC020	Extender
XVUC020Q	Extender (Silver)	
A9	XVUC21B	DC body

Drawing	Part number	Part name
XVUC21BQ	DC body (Silver)	
A10	XVUC21M	AC body NPN
XVUC21MP	AC body PNP	
XVUC21MQP	AC body PNP (Silver)	
A11	XVUZ06	Flexible option
A12	XVUZ01	Fixing Unit - Direct mounting (3 pins)
XVUZ01Q	Fixing Unit - Direct mounting (Silver,3 pins)	
XVUZ03	Fixing Unit - Direct mounting (2 pins)	
XVUZ04	Fixing Unit - Direct mounting (4 pins)	
A13	XVUZ02	Fixing Unit - Plate with Pole (100 mm)
XVUZ02Q	Fixing Unit - Plate with Pole (100 mm, Silver)	
XVUZ400	Fixing Unit - Plate with Pole (400 mm)	
XVUZ800	Fixing Unit - Plate with Pole (800 mm)	
A14	XVUZ05	Fixing Unit - Plate with adjustment pole (100-385 mm)
A15	XVUC43	Green LED unit, Flash
XVUC44	Red LED unit, Flash	
XVUC45	Orange LED unit, Flash	
XVUC46	Blue LED unit, Flash	
XVUC47	White LED unit, Flash	
XVUC48	Yellow LED unit, Flash	
A16	XVUZ100T	Fixing Unit - Metal bracket with pole (100 mm)
XVUZ250T	Fixing Unit - Metal bracket with pole(250 mm)	
XVUZ400T	Fixing Unit - Metal bracket with pole (400 mm)	
A17	XVUZ12	Fixing plate for use on vertical support - black


Modular Tower Lights Mounting




(1) M4 Nut x 3 (attached)

Flexible Option Mounting

Recommended Mounting




No Recommended Mounting



XVUZ01Q

Illuminated Units, Multi-LED and Audible Units Wiring

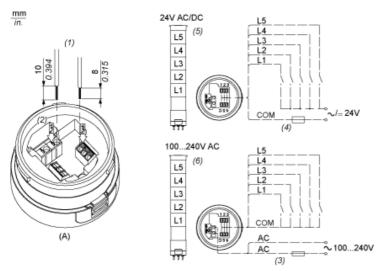

- (A) Fixing Unit
- (1) Dimensions of Wiring size
- (2) Push-in Wire Connectors
- (3) Fuse : 2A ,250V
- (4) Fuse: 0.5A,125V
- (5) Modular Tower Lights 24V AC/DC
- (6) Modular Tower Lights 100...240V AC

L1 to Illuminated LED Units

_ . . I 5 ·