


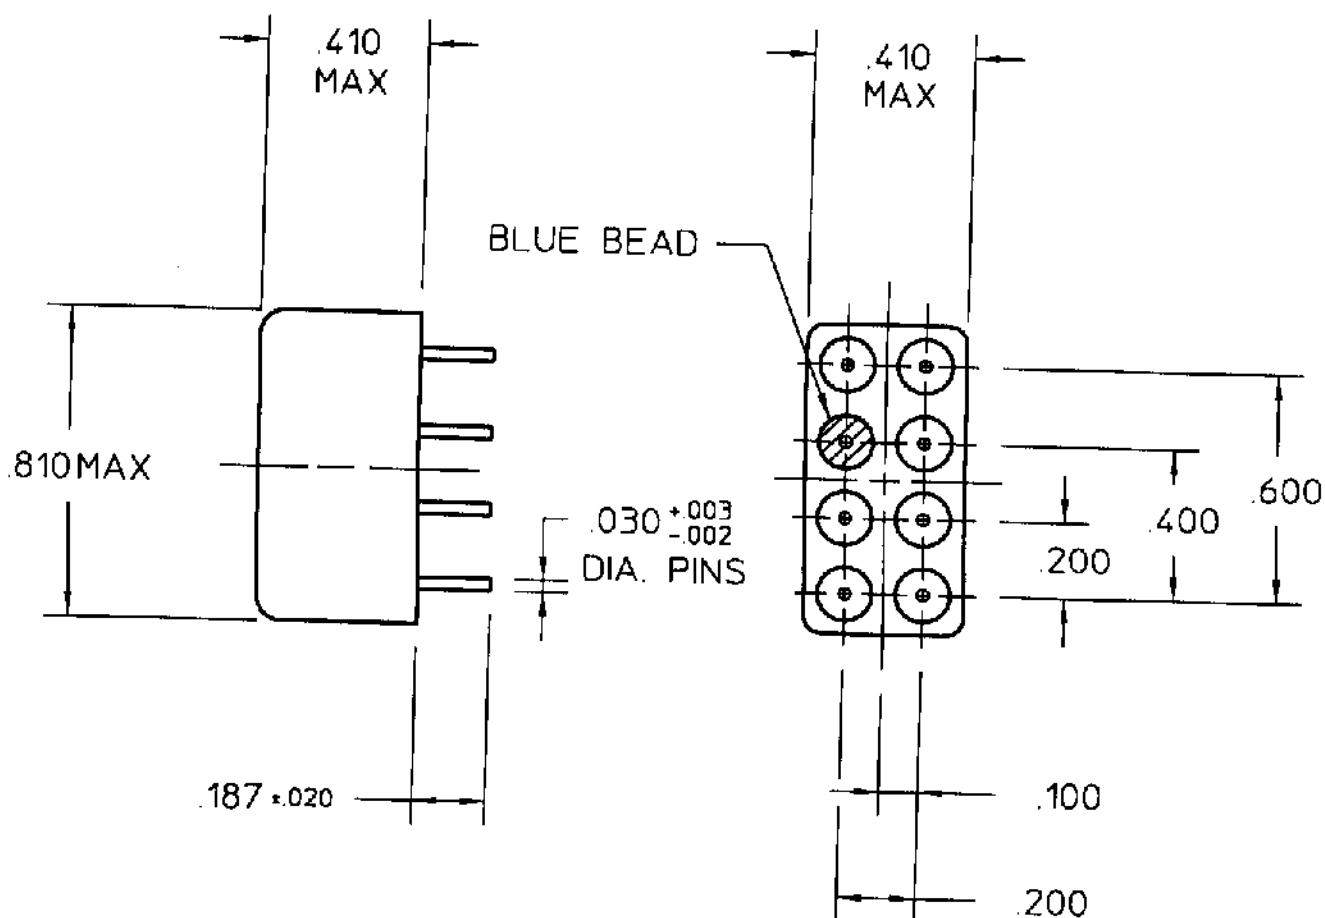

REV. 1 5/28/98

COIL: @ +25 °C

RESISTANCE 700 OHMS $\pm$ 10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 13.5 VDC

MUST RELEASE 8.0 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 100 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 4 MS MAX

RELEASE 4 MS MAX

CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

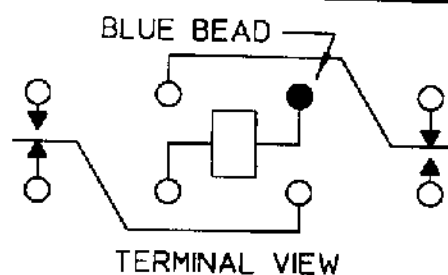

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE 100,000
OPERATIONS

DR. R.B. 10/28/96 CK. 5/28/98

**COMMUNICATIONS
INSTRUMENTS, INC.**

CUST. OPL
CUST. NO. M39016/6-109L

TYPE "HFW" RELAY

HFW1201K45