


Rail-Mounted Quadruple Deck Terminal Blocks or Rail-Mounted Terminal Blocks for Wiring of Electric Motors

CAGE CLAMP®



1
85


Front-entry

0.08 – 4 mm²
400 V/6 kV/3 ①
20 A (2.5 mm²) 25 A (4 mm²)
Terminal block width 6 mm / 0.236 in
8 – 9 mm / 0.33 in


AWG 28 – 12

* CAGE CLAMP®


- ① 400 V = rated voltage
6 kV = rated surge voltage
3 = pollution degree
(see also section 10)
② See application notes on pages 1.197–1.198

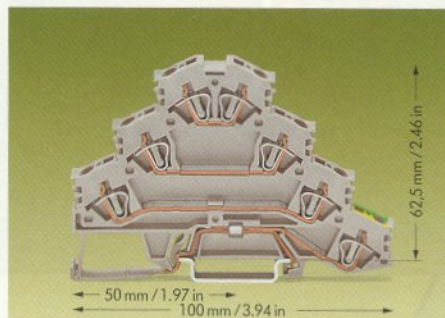

Description	Item-No.	Pack.-unit pcs
Rail-mounted terminal block for wiring of electric motors or rail-mounted quadruple deck terminal block, for DIN 35 rail	Rail-mounted terminal block for wiring of electric motors, L1 – L2 – L3 – PE grey 281-530	50
Accessories (see also section 8)	Appropriate marking system WMB/WSB	
 End and intermediate plate	1 mm / 0.039 in thick grey 281-365 orange 281-366	100 (4 x 25) 100 (4 x 25)
 Screwless end stop	6 mm / 0.236 in wide 249-116 10 mm / 0.394 in wide 249-117	100 (4 x 25) 50 (2 x 25)
 Comb type jumper bar ②, insulated, I _N = I _N of terminal block	2-way 281-482 3-way 281-483 5-way 281-485	100 (4 x 25) 100 (4 x 25) 50 (2 x 25)
 Operating tool, insulated, for comb jumpers	2-way 280-432 3-way 280-433 5-way 281-440	1 1 1
 Insulation stop ②, 5 pcs / strip	white 0.08 – 0.2 mm ² 281-470 light grey 0.25 – 0.5 mm ² 281-471 dark grey 0.75 – 1.5 mm ² 281-472	200 strips 200 strips 200 strips
 Test plug, w. cable 500 mm / 17.7"	2 mm / 0.079 in Ø red 210-136 2.3 mm / 0.091 in Ø yellow 210-137	50 (5 x 10) 50 (5 x 10)
 WMB multi-marking system, 10 strips with 10 markers each, white with black printing	see section 8	
 Marker strips, transparent, for central marking – group marking –	1 m / 3'33" long, 7.5 mm / 0.295 in wide plain 709-196	1

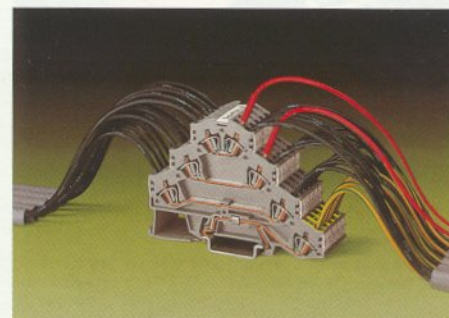


3 phases and ground (earth) conductor in one terminal block
Compact design

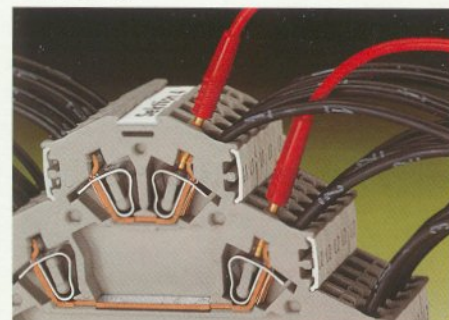

Testing with test plug 2 mm / 0.079 in Ø



Marking clamping units with WAGO quick marking system.
Group marking with marking strips
Item-No. 709-196.

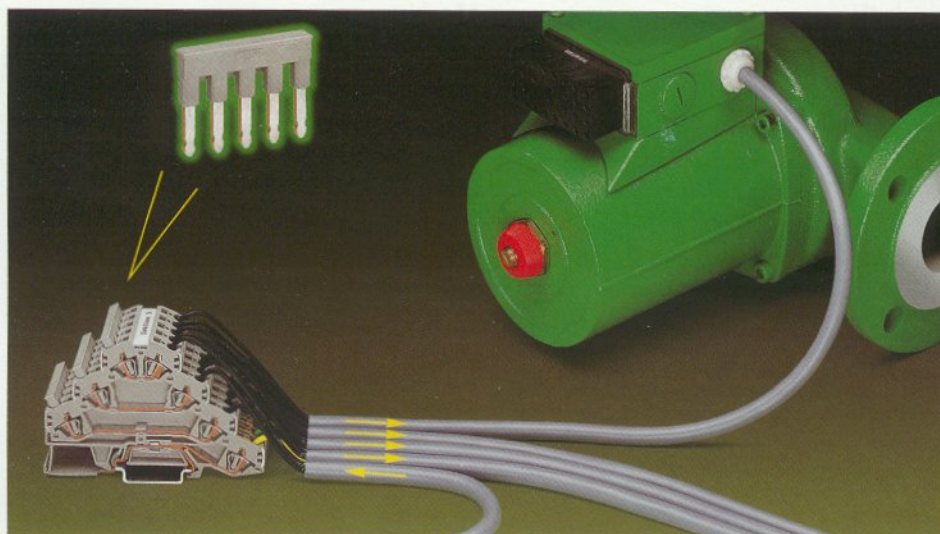

* For further approvals with corresponding ratings see pages 10.3ff.

WAGO®