

# XS612B3DBL2

inductive sensor XS6 M12 - L37mm - brass -  
Sn4mm - 12..24VDC - cable 2m



## Main

|                                    |                                                     |
|------------------------------------|-----------------------------------------------------|
| Range of product                   | OsiSense XS                                         |
| Series name                        | General purpose                                     |
| Sensor type                        | Inductive proximity sensor                          |
| Sensor name                        | XS6                                                 |
| Sensor design                      | Cylindrical M12                                     |
| Size                               | 37 mm                                               |
| Body type                          | Fixed                                               |
| Detector flush mounting acceptance | Flush mountable                                     |
| Material                           | Metal                                               |
| Type of output signal              | Discrete                                            |
| Wiring technique                   | 2-wire                                              |
| [Sn] nominal sensing distance      | 0.16 in (4 mm)                                      |
| Discrete output function           | 1 NC                                                |
| Output circuit type                | DC                                                  |
| Electrical connection              | Cable                                               |
| Cable length                       | 6.56 ft (2 m)                                       |
| [Us] rated supply voltage          | 12...24 V DC reverse polarity protection            |
| Switching capacity in mA           | <= 100 mA DC overload and short-circuit protection  |
| IP degree of protection            | IP68 double insulation IEC 60529<br>IP69K DIN 40050 |

## Complementary

|                          |                                |
|--------------------------|--------------------------------|
| Thread type              | M12 x 1                        |
| Detection face           | Frontal                        |
| Front material           | PPS                            |
| Enclosure material       | Nickel Plated Brass            |
| Sensing range            | > 0.1...0.16 in (> 2.5...4 mm) |
| Operating zone           | 0.00...0.13 in (0...3.2 mm)    |
| Differential travel      | 1...15% of Sr                  |
| Cable composition        | 2 x 0.34 mm <sup>2</sup>       |
| Wire insulation material | PvR                            |
| Status LED               | Output state 1 LED yellow)     |
| Supply voltage limits    | 10...36 V DC                   |
| Switching frequency      | <= 2000 Hz DC                  |
| Maximum voltage drop     | <4 V closed)                   |
| Maximum delay first up   | 10 ms                          |
| Maximum delay response   | 0.3 ms                         |
| Maximum delay recovery   | 0.3 ms                         |
| Marking                  | CE                             |
| Threaded length          | 0.98 in (25 mm)                |
| Length                   | 1.46 in (37 mm)                |
| Net Weight               | 0.20 lb(US) (0.09 kg)          |

## Environment

|                                       |                                         |
|---------------------------------------|-----------------------------------------|
| Product certifications                | CSA<br>UL                               |
| Ambient air temperature for operation | -13...158 °F (-25...70 °C)              |
| Ambient air temperature for storage   | -40...185 °F (-40...85 °C)              |
| Vibration resistance                  | 25 gn +/- 2 mm 10...55 Hz)IEC 60068-2-6 |
| Shock resistance                      | 50 gn 11 ms IEC 60068-2-27              |

## Ordering and shipping details

|                       |                            |
|-----------------------|----------------------------|
| Category              | 22486 - SENSORS, PROXIMITY |
| Discount Schedule     | DS2                        |
| GTIN                  | 00785901841630             |
| Nbr. of units in pkg. | 1                          |
| Package weight(Lbs)   | 1 lb(US) (0.45 kg)         |
| Returnability         | No                         |
| Country of origin     | FR                         |

## Packing Units

|                        |                  |
|------------------------|------------------|
| Unit Type of Package 1 | PCE              |
| Package 1 Height       | 5.12 in (13 cm)  |
| Package 1 width        | 1.61 in (4.1 cm) |
| Package 1 Length       | 3.70 in (9.4 cm) |


## Offer Sustainability

|                            |                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                                                                                                                                                                                                                                                                             |
| California proposition 65  | WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
| REACH Regulation           | <a href="#">REACH Declaration</a>                                                                                                                                                                                                                                                                                                                                                 |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>                                                                                                                                                                                                                                                                                    |
| Mercury free               | Yes                                                                                                                                                                                                                                                                                                                                                                               |
| RoHS exemption information | <a href="#">Yes</a>                                                                                                                                                                                                                                                                                                                                                               |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                                                                                                                                                                                                                                                                                                     |
| Circularity Profile        | <a href="#">End Of Life Information</a>                                                                                                                                                                                                                                                                                                                                           |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

## Dimensions

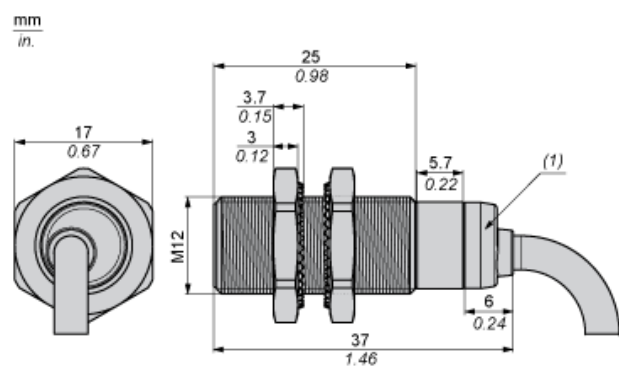

(1) LED

## Minimum Mounting Distances

Side by side



e (1) 8 mm/0.31 in.

≥

Face to face



e (2) 48 mm/1.89 in.

≥

Facing a metal object



e (3) 12 mm/0.47 in.

≥

## Mounting



(1) Bending cable: 4 x external cable diameter


---

## Wiring Schemes

---

### 2-Wire Non-polarised

NC output



BU : Blue  
BN : Brown