
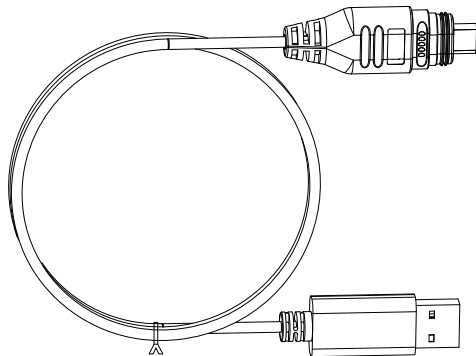


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	12/06/2017	DCUI
B	ECN 9326: PER NEW SPEC ADD DIMS&WINDING DIAGRAM VIEW.REM -2M PN.	08/13/2018	BGATES

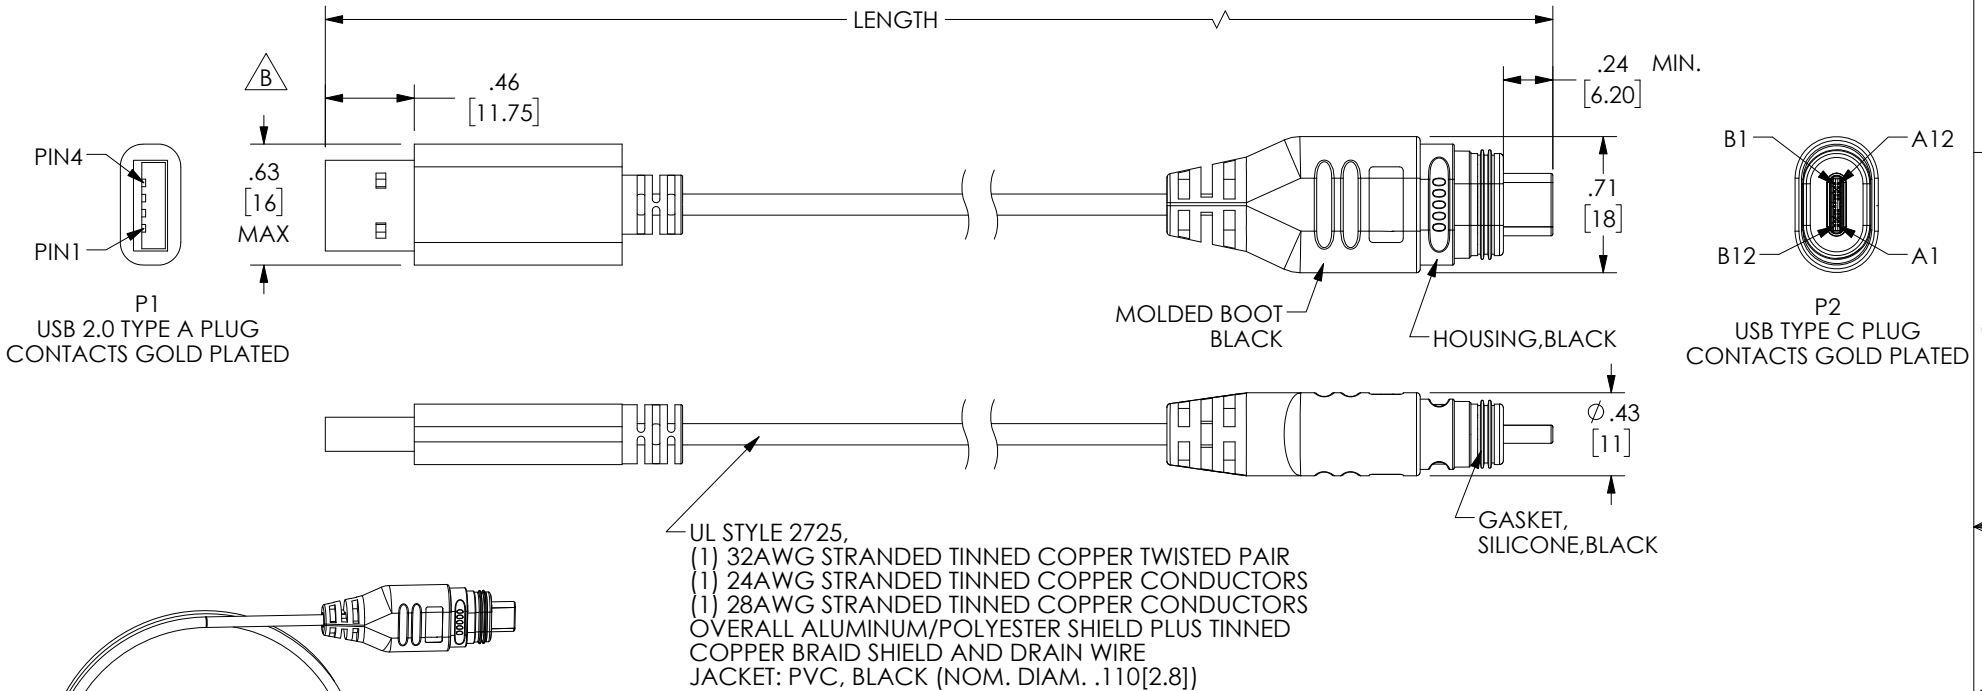

WINDING DIAGRAM

WIRE MAP					
P1	SIGNAL NAME	CONDUCTOR	SIGNAL NAME	P2	COLOR
1	VBUS	INDV.	VBUS	A4,A9,B4,B9	RED
2	D-	TWIST PAIR	Dn1	A7	WHITE
3	D+		Dp1	A6	GREEN
4	GND	INDV.	GND	A1,A12,B1,B12	BLACK
SHELL	SHIELD	BRAID	SHIELD	SHELL	N/A

PART NUMBER	LENGTH	
	METERS	FEET
U3A00064-1M	1.0	3.28
U3A00064-3M	3.0	9.84

NOTES

- 1.INGRESS PROTECTION RATING IS IP68 (P2 ONLY,MATED,1 METER,24H)
- 2.CABLE ASSEMBLIES TO BE TESTED FOR CONTINUITY
- 3.CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [13]	APPROVALS	DATE	 50 HIGH STREET NORTH ANDOVER, MA 01845	
	DRAWN BY CN_Derek_Cui	12/01/2017		
	CHECKED BY CN_Bill_Zhang	12/01/2017	CATEGORY USB 2.0	
	APPROVED BY CN_Shawn_Pan	12/01/2017	PRODUCT DESCRIPTION CBLWTR PRF USB C-M/A-M	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A	FSCM NO. 43321
COLOR VARIATIONS MAY OCCUR		DWG. NO. U3A00064	REV. B	SCALE: NONE
REF		CAD FILE: U3A00064.SLDDRW	SHEET 1 OF 1	