
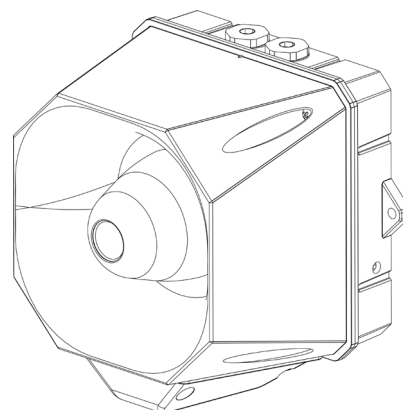



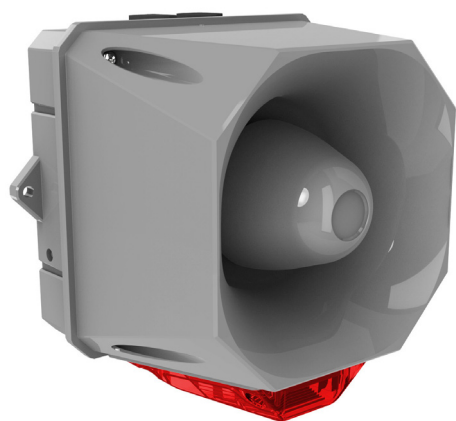


## X10 Maxi Sounder Beacon

The X10 Maxi sounder beacon is an industrial signaling alarm, available in 4 fade resistant body colours, 6 LED beacon colours, and high and low voltage variants. It is certified to IP66 and IP69K, and verified to operate at extreme temperatures -30°C to 70°C, and is therefore suitable for use in harsh conditions where a robust industrial sounder beacon is required. The X10 Maxi sounder beacon comes with an Eaton 10 year Extended Warranty and offers up to 120 dB(A) with 102 tones, and a versatile 4 stage alarm to allow you to retrofit to an existing installation.

### Technical specifications

| X10 Maxi Sounder Beacon             |                                                                                                                                            |               |                             |         |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|---------|
|                                     | Low voltage DC / AC product                                                                                                                |               | AC Mains product            |         |
| Rated voltage                       | 10V - 60V DC                                                                                                                               | 10V - 30V AC  | 115V AC                     | 230V AC |
| Sounder only* (DIN Tone, High Vol)  | 235 - 1600 mA                                                                                                                              | 650 - 2720 mA | 160 mA                      | 83 mA   |
| AV* (DIN Tone, High Vol, 1Hz Flash) | 250 - 1725 mA                                                                                                                              | 705 - 2920 mA | 168 mA                      | 87 mA   |
| Sound output                        | 120dB                                                                                                                                      |               |                             |         |
| Alarm tones                         | 102                                                                                                                                        |               |                             |         |
| Alarm stages                        | 4                                                                                                                                          |               |                             |         |
| Stage control options               | +ve low voltage trigger<br>-ve low voltage trigger<br>+ve supply voltage trigger<br>-ve supply voltage trigger<br>Reverse polarity trigger |               | Dry /0 volt contact trigger |         |
| Flash rate                          | 0.5Hz (30FPM) / 1Hz (60FPM) / Continuous / Off                                                                                             |               |                             |         |
| Operating temperature               | -30°C to +70°C                                                                                                                             |               |                             |         |
| Ingress Protection (IP) rating      | IP66 (dust ingress/powerful jets of water)<br>IP69K (dust ingress/steam jet cleaning)                                                      |               |                             |         |
| Warranty                            | 10 years**                                                                                                                                 |               |                             |         |
| Material                            | UV stabilised polycarbonate ASA                                                                                                            |               |                             |         |
| Colour - housing                    | Red (RAL 3001)<br>White (RAL9003)<br>Dark grey (RAL7012)<br>Light grey (RAL7035)                                                           |               |                             |         |
| Colour - beacon                     | Red<br>Magenta<br>Amber<br>Clear<br>Blue<br>Green                                                                                          |               |                             |         |
| Cable entry                         | Top: 2 x M20 threaded cable entries<br>Bottom: 1 x M20 threaded cable entry                                                                |               |                             |         |
| Connecting terminals                | up to 2.5mm²                                                                                                                               |               |                             |         |
| Weight                              | 2.490kg (AC Mains); 1.925kg (Low voltage DC / AC)                                                                                          |               |                             |         |



\* Supply current range is based on variation of the supply voltage. A change in Tone, Volume or Beacon settings will also impact the supply current.

\*\* Terms and Conditions apply

## Key features

- Powerful up to 120dB(A) output
- IK08 Impact resist and IP Rated to IP66 and IP69K
- 10 year warranty\*\*
- 102 tones facilitates install and retrofits accommodating a wide range of Industry requirements
- 6 lens colours available, secured by salt resistant stainless steel screws
- 4 fade resistant housing colours available
- Up to 4 stage alarm, with multiple alert and control possibilities for both AC and DC variants
- Modular LED beacon capable of multiple functionality on / off; 1/2Hz (30FPM) / 1Hz (60FPM)
- Temperature range -30°C to +70°C
- Captive salt water resistant stainless steel fasteners
- M20 pre drilled threaded cable entries fitted with IP69K blanking plugs as standard
- UV stabilised polycarbonate ASA
- Low Inrush current with a range of dB(A) outputs

## X10 Housing colours

### Housing colours

|                                                                                  |                           |
|----------------------------------------------------------------------------------|---------------------------|
|  | R1 = Red (RAL3001)        |
|  | G1 = Dark grey (RAL7012)  |
|  | G2 = Light grey (RAL7035) |
|  | W1 = White (RAL9003)      |

## X10 Modular lenses

### Lens colours

|                                                                                   |                   |
|-----------------------------------------------------------------------------------|-------------------|
|  | RL = Red lens     |
|  | AL = Amber lens   |
|  | BL = Blue lens    |
|  | GL = Green lens   |
|  | CL = Clear lens   |
|  | ML = Magenta lens |

## Catalogue numbers

| Catalogue no.   | Reference                  | Description                                |
|-----------------|----------------------------|--------------------------------------------|
| 7092315FUL-0351 | X10/CE/MAH/R1/10-60 VAC-DC | X10 maxi, red housing, 10-60 VAC-DC        |
| 7092316FUL-0352 | X10/CE/MAH/R1/115/230 VAC  | X10 maxi, red housing, 115/230 VAC         |
| 7092317FUL-0353 | X10/CE/MAH/W1/10-60 VAC-DC | X10 maxi, white housing, 10-60 VAC-DC      |
| 7092318FUL-0354 | X10/CE/MAH/W1/115/230 VAC  | X10 maxi, white housing, 115/230 VAC       |
| 7092319FUL-0355 | X10/CE/MAH/G1/10-60 VAC-DC | X10 maxi, dark grey housing, 10-60 VAC-DC  |
| 7092320FUL-0356 | X10/CE/MAH/G1/115/230 VAC  | X10 maxi, dark grey housing, 115/230 VAC   |
| 7092321FUL-0357 | X10/CE/MAH/G2/10-60 VAC-DC | X10 maxi, light grey housing, 10-60 VAC-DC |
| 7092322FUL-0358 | X10/CE/MAH/G2/115/230 VAC  | X10 maxi, light grey housing, 115/230 VAC  |
| 7092368FUL-0576 | X10/CE/M3B/RL              | X10 maxi beacon, red lens                  |
| 7092369FUL-0577 | X10/CE/M3B/AL              | X10 maxi beacon, amber lens                |
| 7092370FUL-0578 | X10/CE/M3B/BL              | X10 maxi beacon, blue lens                 |
| 7092371FUL-0579 | X10/CE/M3B/GL              | X10 maxi beacon, green lens                |
| 7092372FUL-0580 | X10/CE/M3B/CL              | X10 maxi beacon, clear lens                |
| 7092373FUL-0581 | X10/CE/M3B/ML              | X10 maxi beacon, magenta lens              |

**Eaton**  
EMEA Headquarters  
Route de la Longeraie 7  
1110 Morges, Switzerland  
Eaton.eu

© 2018 Eaton  
All Rights Reserved  
Printed in EMEA  
Version 2, November 2018