

Super Fast Recovery Rectifier Diodes

V_{RRM} - 50 Volts & 150 Volts, 6A

multicompPRO

**RoHS
Compliant**



Features


- Glass Passivated (GPP)
- Super fast switching for high efficiency
- Low leakage current
- High forward surge capability
- Solder dip 260°C, 40s
- Component in accordance to WEEE 2002/96/EC
- Lead free
- Case style: R-6 molded plastic

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

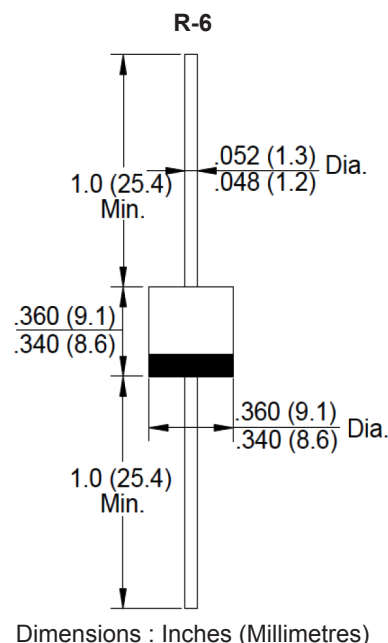

Characteristics	Symbol	SF61G	SF63G	Unit
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	150	V
Maximum RMS Voltage	V _{RMS}	35	105	
Maximum DC Blocking Voltage	V _{DC}	50	150	
Maximum Average Forward Rectified Current 0.375" (9.5mm) lead length @ T _A = 55°C	I _(AV)	6		A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method)	I _{FSM}	150		A
Maximum Instantaneous Forward Voltage at 6A	V _F	0.95		V
Max. DC Reverse Current @ T _J = 25°C	I _R	5		μA
Rated DC Blocking Voltage @ T _J = 100°C		50		
Maximum Reverse Recovery Time (Note 1)	T _{RR}	35		nS
Typical Junction Capacitance (Note 2)	C _J	120		pF
Typical Thermal Resistance (Note 3)	R _{θJA}	30		°C/W
Operating Junction Temperature Range	T _J	-65 to +150		°C
Storage Temperature Range	T _{STG}			

Notes:

1. Reverse recovery condition $I_F = 0.5\text{A}$, $I_R = 1\text{A}$, $I_{RR} = 0.25\text{A}$
2. Measured at 1 MHz and applied reverse voltage of 4V DC
3. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted
4. The typical data above is for reference only

Newark.com/exclusive-brands
Farnell.com/exclusive-brands
Element14.com/exclusive-brands

multicompPRO

Super Fast Recovery Rectifier Diodes

V_{RRM} - 50 Volts & 150 Volts, 6A

multicompPRO

Rating and Characteristic Curves

FIG.1-FORWARD CURRENT DERATING CURVE

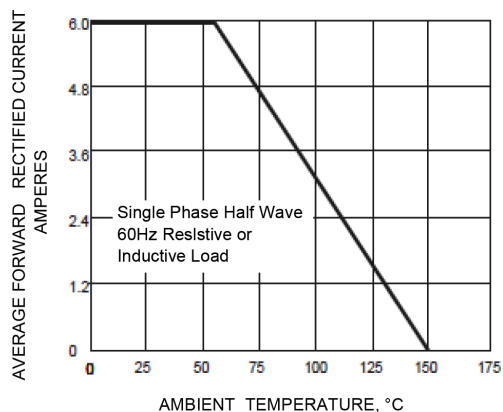


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

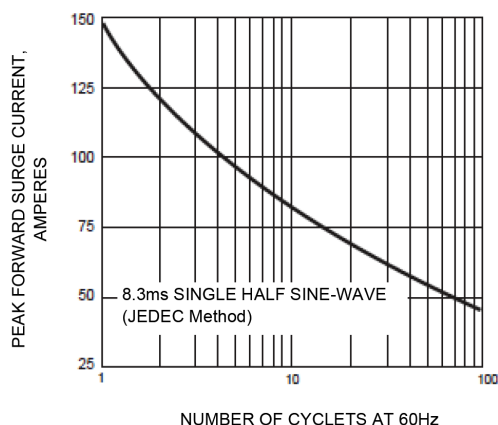


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS


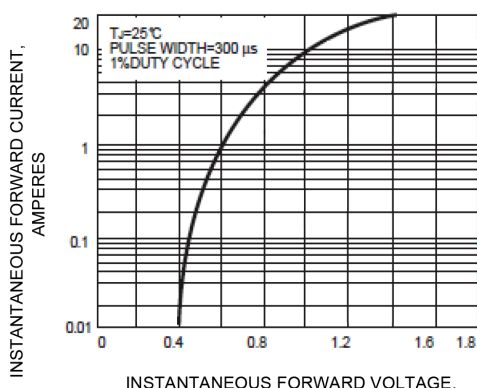


FIG.4-TYPICAL REVERSE CHARACTERISTICS

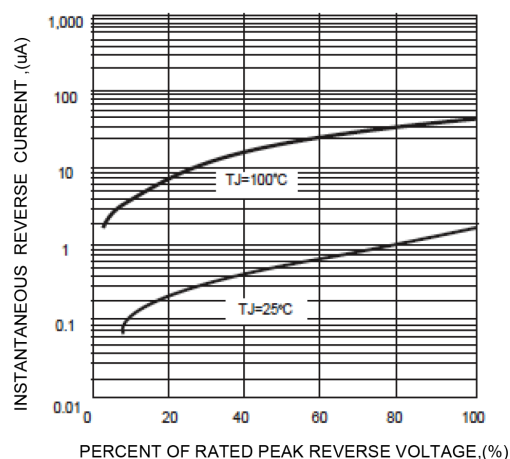

Part Number Table

Description	Part Number
Rectifier Diode, Super Fast, 50V, 6A, R-6	SF61G
Rectifier Diode, Super Fast, 150V, 6A, R-6	SF63G

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/exclusive-brands
Farnell.com/exclusive-brands
Element14.com/exclusive-brands

multicompPRO