

Data sheet | Item number: 2059-323/998-403

SMD PCB terminal block; 0.5 mm²; Pin spacing 3 mm; 3-pole; PUSH WIRE®; in tape-and-reel packaging; 0,50 mm²; black



www.wago.com/2059-323/998-403



RoHS Compliant

[BOMcheck.net](https://www.bomcheck.net)

Color:

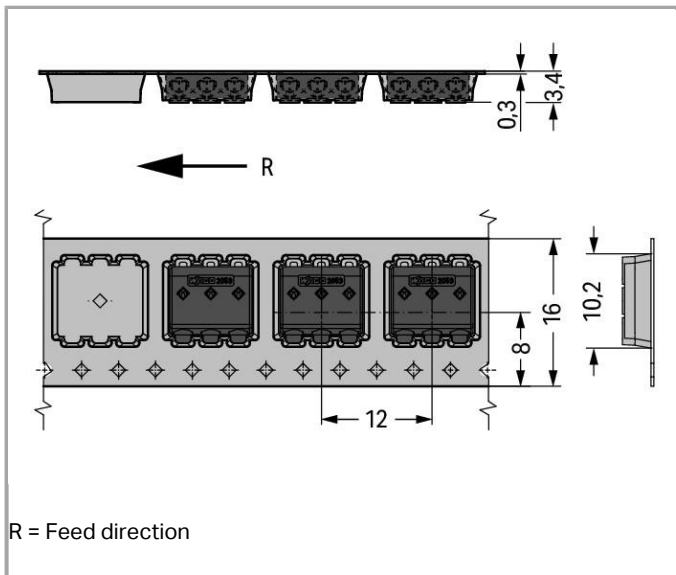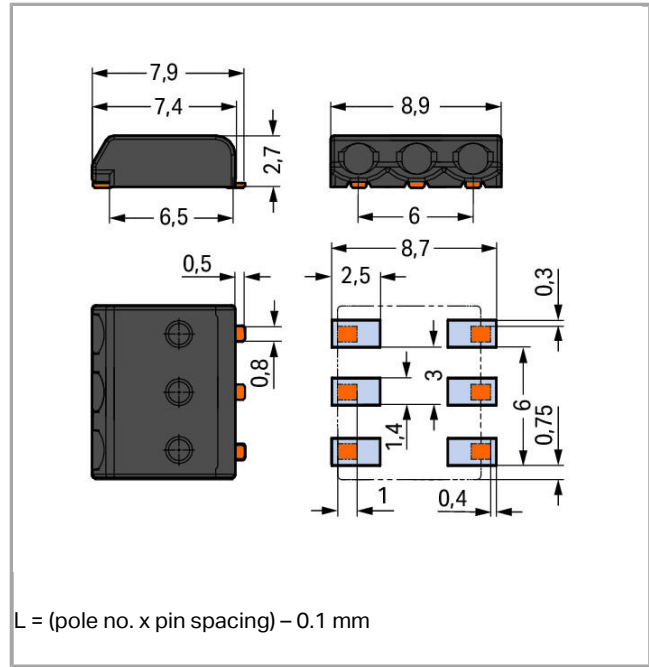

R = Feed direction



Item description

- SMD PCB terminal blocks with PUSH WIRE® connection technology
- Push-in termination of solid conductors
- Easy conductor removal, e.g., via operating tool
- Just 2.7 mm tall



- Assemble terminal blocks without pole loss
- Available in tape-and-reel packaging for automated assembly

Note:

Application note:

Suitable for lead-free, reflow-soldering profiles per DIN EN 61760-1 and IEC 60068-2-58 up to max.

260 °C peak temperature. Due to customer-specific variables (e.g., component configuration and orientation, type of soldering machine, solder paste), trial runs are recommended to ensure product and process compatibility under actual manufacturing conditions.

Recommendation:

Recommendation for SMD stencil:

Material thickness, 150 µm. Pattern layout identical to solder pad layout.

Data**Electrical data****Ratings per IEC/EN 60664-1**

Rated voltage (III / 3)	63 V
Rated impulse voltage (III / 3)	2.5 kV
Rated voltage (III / 2)	160 V
Rated impulse voltage (III / 2)	2.5 kV
Rated voltage (II / 2)	320 V
Rated impulse voltage (II / 2)	2.5 kV
Rated current	3 A

Approvals per UL 1977

Rated voltage per UL 1977 (factory wiring only)	250 V
Rated current per UL 1977 (factory wiring only)	3 A

Connection data

Connection technology	PUSH WIRE®
Actuation type	Operating tool
Solid conductor	0.14 ... 0.34 mm² / 26 ... 22 AWG
Strip length	4 ... 5.5 mm / 0.16 ... 0.22 inch
Conductor entry angle to the PCB	0°
Solid conductor (2)	0.5 mm² / 20 AWG



Note (conductor cross-section)	For conductors that are not rigid enough (26 AWG), the clamping unit must be opened using an operating tool.
Note (conductor cross-section) 2	No reconnection of smaller conductor cross-sections (0.5 mm ² / 20 AWG)
Strip length (2)	6 ... 7.5 mm / 0.24 ... 0.3 inch
Total number of connection points	3
Total number of potentials	3
Number of connection types	1
Number of levels	1
No. of poles	3

Geometrical Data

Pin spacing	3 mm / 0.118 inch
Width	8.9 mm / 0.35 inch
Height	2.7 mm / 0.106 inch
Depth	7.9 mm / 0.311 inch
Reel diameter of tape-and-reel packaging	330 mm
Tape width	16 mm

PCB contact

PCB contact	SMD
-------------	-----

Material Data

Color	black
Material group	I
Insulating material	Polyphthalamide (PPA GF)
Flammability class per UL94	V0
Clamping spring material	Chrome nickel spring steel (CrNi)
Contact material	Copper alloy
Contact plating	tin-plated
Weight	0.247 g

Environmental Requirements

Limit temperature range	-60 ... +105 °C
-------------------------	-----------------

Commercial data

Country of origin	CH
GTIN	4055143476515
Customs Tariff No.	85369010000

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CCA DEKRA Certification B.V.	EN 60947-7-4	NTR NL-7680
	CCA DEKRA Certification B.V.	EN 60838	NTR NL-7720
	KEMA/KEUR DEKRA Certification B.V.	EN 60947-7-4	71-103560
	KEMA/KEUR DEKRA Certification B.V.	EN 60838	71-106226

Compatible products

tools

	Item no.: 2059-189 Operating tool; made of insulating material; for 2059 Series	www.wago.com/2059-189
	Item no.: 206-859 Operating tool; for 2059 Series	www.wago.com/206-859

General accessories

	Item no.: 2059-903 Board-to-Board Link; Pin spacing 3 mm; 3-pole; Length: 15.3 mm; white	www.wago.com/2059-903
	Item no.: 2059-903/018-000 Board-to-Board Link; Pin spacing 3 mm; 3-pole; Length: 17.5 mm; white	www.wago.com/2059-903/018-000
	Item no.: 2059-903/021-000 Board-to-Board Link; Pin spacing 3 mm; 3-pole; Length: 20.5 mm; white	www.wago.com/2059-903/021-000

Downloads

Documentation

Additional Information

Technical explanations	Apr 3, 2019	pdf	Download
------------------------	-------------	-----	----------



Subject to changes.

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.