


Printed-circuit board connector - MSTBT 2,5/ 2-ST BU BDPA,XT2 SO - 1713219

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Plug component, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 2, Pitch: 5 mm, Connection method: Screw connection with tension sleeve, Color: blue, Contact surface: Tin

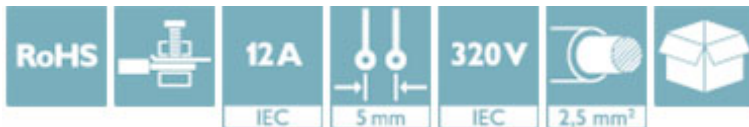

Key Commercial Data

Packing unit	100 STK
GTIN	 4 055626 309668
GTIN	4055626309668
Weight per Piece (excluding packing)	3.639 g
Custom tariff number	85366990
Country of origin	Germany
Note	Made to Order (non-returnable)

Technical data

Dimensions

Width	10 mm
Pitch	5 mm
Dimension a	5 mm

General

Number of positions	2
Connection method	Screw connection with tension sleeve
Insulating material group	I
Rated voltage (III/2)	320 V
Nominal current I_N	12 A
Nominal cross section	2.5 mm ²
Flammability rating according to UL 94	V0
Screw thread	M3

Standards and Regulations

Flammability rating according to UL 94	V0
--	----

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
------------	--

Printed-circuit board connector - MSTBT 2,5/ 2-ST BU BDPA,XT2 SO - 1713219

Technical data

Environmental Product Compliance

	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"
--	--