

Printed-circuit board connector - PC 16/ 4-STF-10,16 BK - 1710352

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


PCB connector, nominal current: 125 A, rated voltage (III/2): 1000 V, number of positions: 4, pitch: 10.16 mm, connection method: Screw connection with tension sleeve, color: black, contact surface: Tin



The figure shows a 5-pos. version of the product

Your advantages

- ✓ Well-known connection principle allows worldwide use
- ✓ Low temperature rise, thanks to maximum contact force
- ✓ Allows connection of two conductors
- ✓ Integrated double steel spring provides additional safety in the event of temperature and power fluctuations
- ✓ Screwable flange for superior mechanical stability
- ✓ Integrated protective guide prevents incorrect insertion of the conductor underneath the tension sleeve

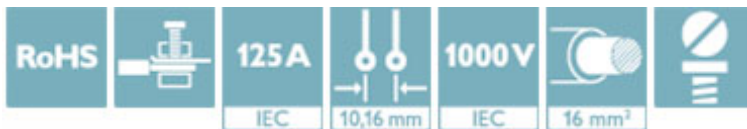

Key Commercial Data

Packing unit	1
GTIN	
GTIN	4055626149776
Custom tariff number	85366990

Technical data

Dimensions

Length [l]	41.5 mm
Width [w]	58.4 mm
Height [h]	27.8 mm
Pitch	10.16 mm
Dimension a	30.48 mm

General

Range of articles	PC 16/...-STF
Number of positions	4

Printed-circuit board connector - PC 16/ 4-STF-10,16 BK - 1710352

Technical data

General

Connection method	Screw connection with tension sleeve
Insulating material group	I
Rated voltage (III/2)	1000 V
Nominal current I_N	125 A
Nominal cross section	16 mm ²
Flammability rating according to UL 94	V0

Standards and Regulations

Flammability rating according to UL 94	V0
--	----

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Classifications

eCl@ss

eCl@ss 5.1	27260700
eCl@ss 6.0	27260700
eCl@ss 7.0	27440309
eCl@ss 8.0	27440309
eCl@ss 9.0	27440309

ETIM

ETIM 5.0	EC002638
ETIM 6.0	EC002638

UNSPSC

UNSPSC 13.2	39121409
-------------	----------

Approvals

Approvals

Approvals

IECEE CB Scheme / SEV / EAC / cULus Recognized

Ex Approvals

Printed-circuit board connector - PC 16/ 4-STF-10,16 BK - 1710352

Approvals

Approval details

IECEE CB Scheme		http://www.iecee.org/	CH-8077
Nominal voltage UN	1000 V		
Nominal current IN	76 A		

SEV		https://www.electrosuisse.ch/de/meta/shop/produktezertifikate.html	IK-3431
Nominal voltage UN	1000 V		
Nominal current IN	76 A		
mm²/AWG/kcmil	16		

EAC		B.01742
-----	---	---------

cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E60425-20040202
	D	B	C
Nominal voltage UN	600 V	300 V	300 V
Nominal current IN	5 A	66 A	66 A