


Printed-circuit board connector - SPC 16/ 3-ST-10,16 BK - 1702479

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Plug component, Nominal current: 76 A, Number of positions: 3, Pitch: 10.16 mm, Connection method: Push-in spring connection, Color: black, Contact surface: Silver

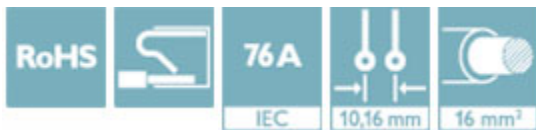

Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 588386
GTIN	4046356588386
Weight per Piece (excluding packing)	24.800 g
Custom tariff number	85366990
Country of origin	Bulgaria

Technical data

Dimensions

Pitch	10.16 mm
Dimension a	20.32 mm

General

Range of articles	SPC 16/..-ST
Type of contact	Female connector
Number of positions	3
Connection method	Push-in spring connection
Rated voltage (III/3)	1000 V 1000 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	76 A
Nominal cross section	16 mm²

Connection data

Conductor cross section solid min.	0.75 mm²
Conductor cross section solid max.	16 mm²
Conductor cross section flexible min.	0.75 mm²

Printed-circuit board connector - SPC 16/ 3-ST-10,16 BK - 1702479

Technical data

Connection data

Conductor cross section flexible max.	16 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve min.	0.75 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve max.	16 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve min.	0.75 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve max.	10 mm ²
Conductor cross section AWG min.	18
Conductor cross section AWG max.	4
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min.	0.75 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max.	4 mm ²
Minimum AWG according to UL/CUL	20
Maximum AWG according to UL/CUL	4

Standards and Regulations

Connection in acc. with standard	EN-VDE
	CUL

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals

Approval details

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 60425
---------------	---	---	--------------

Printed-circuit board connector - SPC 16/ 3-ST-10,16 BK - 1702479

Approvals

cUL Recognized



<http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm>

FILE E 60425

EAC



B.01742

cULus Recognized



<http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm>