

IPC 5/ 8-STGCL-7,62

Order No.: 1718326

The figure shows a 5-pos. version of the product

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1718326>

Plug component, Nominal current: 41 A, Nom. voltage: 1000 V, Pitch:
7.62 mm, Number of positions: 8, Connection type: Screw connection,
Color: green

Commercial data

EAN	4046356175333
Pack	50 pcs.
Customs tariff	85366990
Weight/Piece	0.035354 KG
Catalog page information	Page 337 (CC-2007)

Product notes

WEEE/RoHS-compliant since:
11/23/2006



[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Certificates / Approvals



Certification

CUL, UL

CUL


Nominal voltage U_N	600 V
Nominal current I_N	41 A
AWG/kcmil	24-8

UL

Nominal voltage U_N	600 V
Nominal current I_N	41 A
AWG/kcmil	24-8



Drawings

Diagram

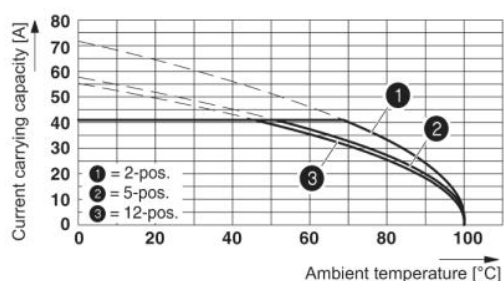

Derating curve for: IPC 5/...-ST-7.62 with PC 5/...-ST-7.62

Conductor cross section = 10 mm²

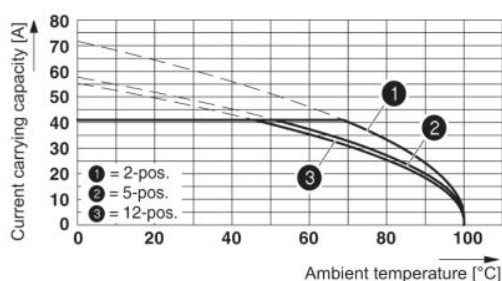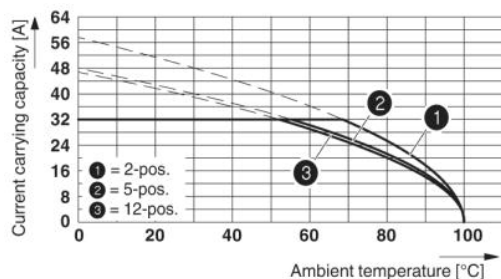


Derating curve for: IPC 5/...-ST-7.62 with IPC 5/...-G-7.62

Conductor cross section = 10 mm²

Derating curve for: IPC 5/...-ST-7,62 with IPC 5/...-G-7,62
 Conductor cross section 6 mm²

Dimensioned drawing

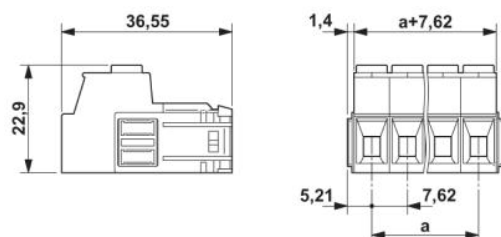

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact
Technical modifications reserved;