

CC 2,5/ 5-GF-5,08-LR P26THR

Order No.: 1792656



<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1792656>

Header, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 5, Pitch: 5.08 mm, Color: black, Contact surface: Tin, Assembly: SMD/THT/THR

Commercial data

EAN	 4 046356 615662
Note	Made-to-order
sales group	E172
Pack	50 Pcs.
Customs tariff	85366990
Gross weight in pieces	0.003394 KG
Net weight per piece	0.00222 KG
Catalog page information	Page 299 (C-1-2013)

Product notes

WEEE/RoHS-compliant since:
08/18/2010



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions

Length	12 mm
Height	11.2 mm
Pitch	5.08 mm
Dimension a	20.32 mm
Pin dimensions	1 x 1 mm
Hole diameter	1.6 mm

General

Range of articles	CC 2,5/...-GF-LR
Insulating material group	IIIa
Rated surge voltage (III/3)	4 kV
Rated surge voltage (III/2)	4 kV
Rated surge voltage (II/2)	4 kV
Rated voltage (III/3)	250 V
Rated voltage (III/2)	320 V
Rated voltage (II/2)	400 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	12 A
Insulating material	LCP
Inflammability class according to UL 94	V0
Color	black
Number of positions	5

Certificates / Approvals



Certification


cULus Recognized, GOST

Certifications applied for:


Certification Ex:

Drawings

Drilling plan/solder pad geometry

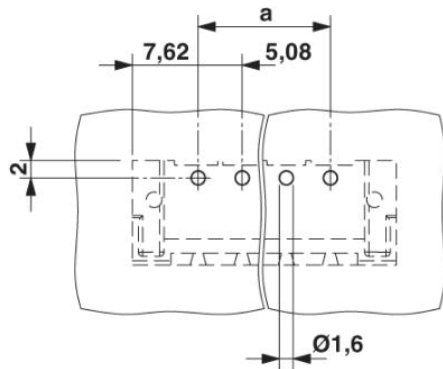


Dimensioned drawing

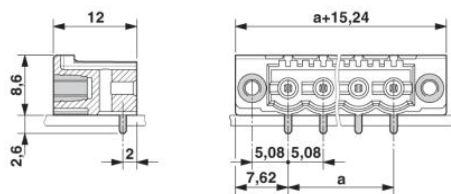

Schematic diagram

Panel cutout

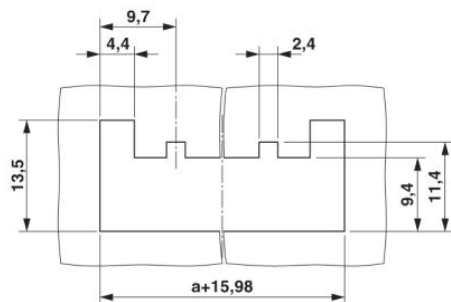

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;