

# Printed-circuit board connector - CC 2,5/17-GF-5,08-LR P26THR - 1827566

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


PCB headers, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 17, pitch: 5.08 mm, color: black, contact surface: Tin, mounting: THR soldering



The figure shows a 16-position version

## Your advantages

- ✓ Designed for integration into the SMT soldering process
- ✓ Maximum flexibility when it comes to device design – one header for connectors with different connection technologies
- ✓ Screwable flange for superior mechanical stability
- ✓ Automatic locking and intuitive release through Lock and Release operating lever in contrasting color

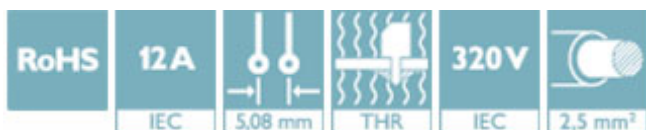

## Key Commercial Data

|                                      |                                                                                                         |
|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit                         | 50 pc                                                                                                   |
| Minimum order quantity               | 50 pc                                                                                                   |
| GTIN                                 | <br>4 046356 953191 |
| GTIN                                 | 4046356953191                                                                                           |
| Weight per Piece (excluding packing) | 2.220 g                                                                                                 |
| Custom tariff number                 | 85366930                                                                                                |
| Country of origin                    | Germany                                                                                                 |

## Technical data

### Dimensions

|              |          |
|--------------|----------|
| Length [ l ] | 12 mm    |
| Width        | 96.47 mm |
| Pitch        | 5.08 mm  |
| Dimension a  | 81.28 mm |
| Width [ w ]  | 96.47 mm |
| Height [ h ] | 11.17 mm |

# Printed-circuit board connector - CC 2,5/17-GF-5,08-LR P26THR - 1827566

## Technical data

### Dimensions

|                          |          |
|--------------------------|----------|
| Height                   | 8.57 mm  |
| Length of the solder pin | 2.6 mm   |
| Pin dimensions           | 1 x 1 mm |
| Length                   | 12 mm    |

### General

|                                        |                  |
|----------------------------------------|------------------|
| Range of articles                      | CC 2,5/...-GF-LR |
| Insulating material group              | IIIa             |
| Rated surge voltage (III/3)            | 4 kV             |
| Rated surge voltage (III/2)            | 4 kV             |
| Rated surge voltage (II/2)             | 4 kV             |
| Rated voltage (III/3)                  | 250 V            |
| Rated voltage (III/2)                  | 320 V            |
| Rated voltage (II/2)                   | 400 V            |
| Connection in acc. with standard       | EN-VDE           |
| Nominal current $I_N$                  | 12 A             |
| Insulating material                    | LCP              |
| Flammability rating according to UL 94 | V0               |
| Color                                  | black            |
| Number of positions                    | 17               |

### Standards and Regulations

|                                        |        |
|----------------------------------------|--------|
| Connection in acc. with standard       | EN-VDE |
| Flammability rating according to UL 94 | V0     |

### Environmental Product Compliance

|            |                                                                                                     |
|------------|-----------------------------------------------------------------------------------------------------|
| REACH SVHC | Lead 7439-92-1                                                                                      |
| China RoHS | Environmentally Friendly Use Period = 50                                                            |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 5.1 | 27260700 |
| eCl@ss 6.0 | 27260700 |
| eCl@ss 7.0 | 27440402 |
| eCl@ss 8.0 | 27440402 |
| eCl@ss 9.0 | 27440402 |

## Printed-circuit board connector - CC 2,5/17-GF-5,08-LR P26THR - 1827566

### Classifications

#### ETIM

|          |          |
|----------|----------|
| ETIM 4.0 | EC002637 |
| ETIM 5.0 | EC002637 |
| ETIM 6.0 | EC002637 |

#### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 13.2 | 39121409 |
|-------------|----------|

### Approvals

#### Approvals

#### Approvals

EAC / cULus Recognized

#### Ex Approvals

#### Approval details

|     |                                                                                     |         |
|-----|-------------------------------------------------------------------------------------|---------|
| EAC |  | B.01742 |
|-----|-------------------------------------------------------------------------------------|---------|

|                    |                                                                                     |                                                                                                                                                       |                 |
|--------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| cULus Recognized   |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | E60425-19931011 |
|                    | D                                                                                   | B                                                                                                                                                     |                 |
| Nominal voltage UN | 300 V                                                                               | 300 V                                                                                                                                                 |                 |
| Nominal current IN | 10 A                                                                                | 16 A                                                                                                                                                  |                 |

### Accessories

#### Accessories

#### Coding element

Coding star - CR-MSTB - 1734401



Coding section, inserted into the recess in the header or the inverted plug, red insulating material

## Printed-circuit board connector - CC 2,5/17-GF-5,08-LR P26THR - 1827566

### Accessories

---

Coding section - CR-MSTB NAT HT - 1954362



HT coding section, prior to the reflow soldering process it is inserted into the recess on the header, made from high-temperature-resistant beige insulation material

---

---

Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>