

CCDN 2,5/ 5-G1 P26 THR

Order No.: 1734300

The figure shows a 10-position version of the product

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1734300>

Header, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5 mm,
Number of positions: 5, Color: black, Assembly: Taped SMD/THT/THR
components

Commercial data

EAN	4046356177177
Pack	50 pcs.
Customs tariff	85366990
Weight/Piece	0.007066 KG
Catalog page information	Page 242 (CC-2009)

Product notes

WEEE/RoHS-compliant since:
11/29/2006



[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data

Dimensions / positions

Pitch	5 mm
Dimension a	20 mm
Number of positions	5
Pin dimensions	1 x 1


Pin spacing	5 mm
Hole diameter	1.6 mm

Technical data


Insulating material group	IIIa
Rated surge voltage (III/3)	4 kV
Rated surge voltage (III/2)	4 kV
Rated surge voltage (II/2)	4 kV
Rated voltage (III/2)	400 V
Rated voltage (II/2)	400 V
Nominal current I_N	12 A
Nominal voltage U_N	320 V
Maximum load current	12 A
Insulating material	LCP
Inflammability class acc. to UL 94	V0

Drawings

Drilling diagram

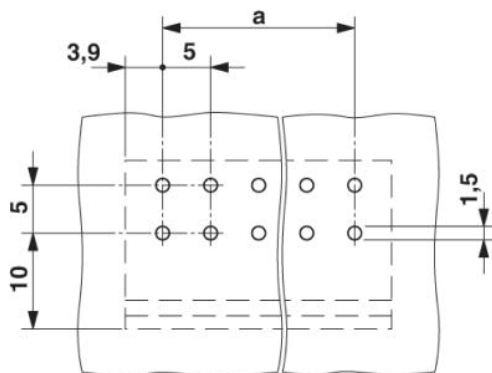

Dimensioned drawing

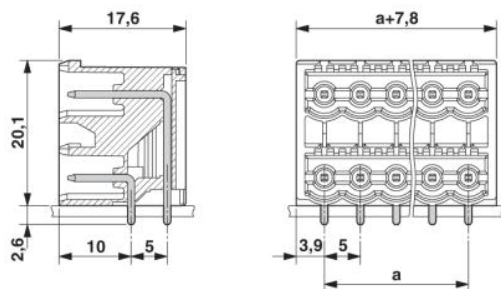

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact
Technical modifications reserved;