

## Feed-through header - EMC 1,5/ 4-G-3,81 - 1897827

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


PCB headers, nominal current: 8 A, rated voltage (III/2): 160 V, number of positions: 4, pitch: 3.81 mm, color: green, contact surface: Tin, mounting: Press-in technology



The figure shows a 10-position version of the product

### Your advantages

- ✓ Long-term stable press-in connection ensures high holding force without thermal load
- ✓ Maximum flexibility when it comes to device design – one header for connectors with different connection technologies

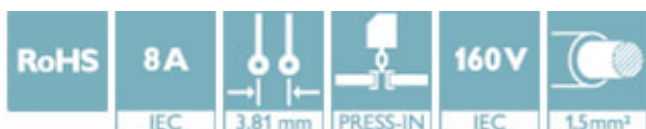

### Key Commercial Data

|              |                                                                                                         |
|--------------|---------------------------------------------------------------------------------------------------------|
| Packing unit | 50 pc                                                                                                   |
| GTIN         | <br>4 017918 166403 |
| GTIN         | 4017918166403                                                                                           |

### Technical data

#### Dimensions

|                          |              |
|--------------------------|--------------|
| Length [ l ]             | 10.7 mm      |
| Width                    | 16.63 mm     |
| Pitch                    | 3.81 mm      |
| Dimension a              | 11.43 mm     |
| Width [ w ]              | 16.63 mm     |
| Height [ h ]             | 10.5 mm      |
| Height                   | 7 mm         |
| Length of the solder pin | 3.5 mm       |
| Pin dimensions           | 0.8 x 0.8 mm |
| Length                   | 10.7 mm      |

#### General

|                   |               |
|-------------------|---------------|
| Range of articles | EMC 1,5/...-G |
|-------------------|---------------|

## Feed-through header - EMC 1,5/ 4-G-3,81 - 1897827

### Technical data

#### General

|                                        |        |
|----------------------------------------|--------|
| Insulating material group              | IIIa   |
| Rated surge voltage (III/3)            | 2.5 kV |
| Rated surge voltage (III/2)            | 2.5 kV |
| Rated surge voltage (II/2)             | 2.5 kV |
| Rated voltage (III/3)                  | 160 V  |
| Rated voltage (III/2)                  | 160 V  |
| Rated voltage (II/2)                   | 250 V  |
| Connection in acc. with standard       | EN-VDE |
| Nominal current $I_N$                  | 8 A    |
| Maximum load current                   | 8 A    |
| Insulating material                    | PBT    |
| Flammability rating according to UL 94 | V0     |
| Color                                  | green  |
| Number of positions                    | 4      |

#### Standards and Regulations

|                                        |        |
|----------------------------------------|--------|
| Connection in acc. with standard       | EN-VDE |
|                                        | CUL    |
| Flammability rating according to UL 94 | V0     |


#### Environmental Product Compliance

|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |


### Drawings

## Feed-through header - EMC 1,5/ 4-G-3,81 - 1897827

Drilling diagram

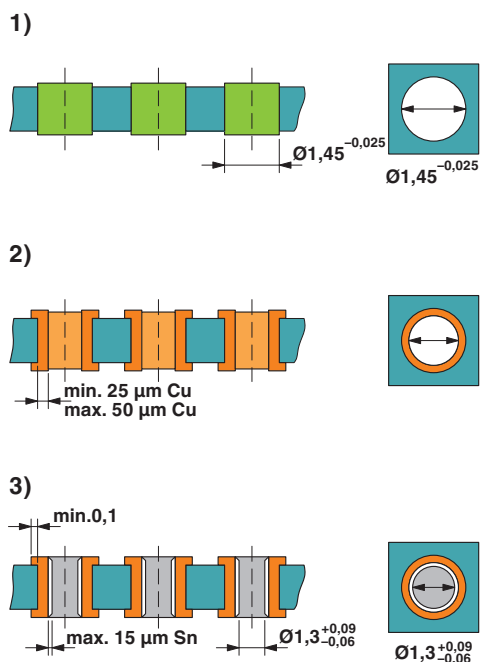


Drilling diagram



Drill hole layout in FR4 or EP-GC basic material

Dimensional drawing

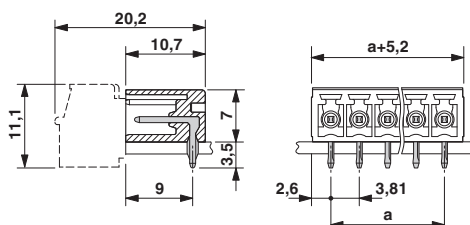

### Approvals

Approvals

Approvals

EAC / cULus Recognized

Ex Approvals

Approval details

## Feed-through header - EMC 1,5/ 4-G-3,81 - 1897827

### Approvals

|     |                                                                                   |         |
|-----|-----------------------------------------------------------------------------------|---------|
| EAC |  | B.01742 |
|-----|-----------------------------------------------------------------------------------|---------|

|                    |                                                                                   |                                                                                                                                                       |                 |
|--------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| cULus Recognized   |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | E60425-20110128 |
|                    | D                                                                                 | B                                                                                                                                                     |                 |
| Nominal voltage UN | 300 V                                                                             | 300 V                                                                                                                                                 |                 |
| Nominal current IN | 8 A                                                                               | 8 A                                                                                                                                                   |                 |

Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>