

MC 1,5/ 4-G-3,5 BK

Order No.: 1916397

<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1916397>

Header, Nominal current: 8 A, Number of positions: 4, Pitch: 3.5 mm,
Color: Black, Contact surface: Tin

Commercial data

EAN	 4 017918 464202
Note	Made-to-order
sales group	E100
Pack	50 Pcs.
Customs tariff	85366990
Gross weight in pieces	0.001199 KG
Net weight per piece	0.000989 KG

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions

Pitch	3.5 mm
Dimension a	10.5 mm

General

Range of articles	MC 1,5/...-G
Rated voltage (III/3)	160 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	8 A
Color	Black
Number of positions	4

Certificates / Approvals



Certification


CSA, cULus Recognized, GOST, VDE Gutachten mit
Fertigungsüberwachung, CCA, IEC CB Scheme

Certifications applied for:

Certification Ex:

Drawings

Diagram

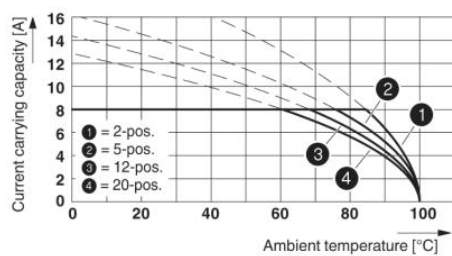

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2013 Phoenix Contact
Technical modifications reserved;