


MCV 1,5/ 8-G-3,5 P26 THR

Order No.: 1779488

The figure shows a 10-position version of the product

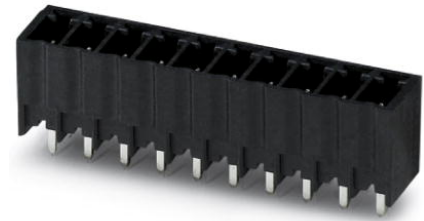

<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1779488>

Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 8, Pitch: 3.5 mm, Color: black, Contact surface: Tin, Assembly: SMD/THT/THR, User information and design recommendations for through hole reflow technology can be found under "Downloads"

Commercial data

EAN	4 046356 531801
sales group	E171
Pack	50 Pcs.
Customs tariff	85366990
Gross weight in pieces	0.002018 KG
Net weight per piece	0.002018 KG
Catalog page information	Page 217 (C-1-2013)

Product notes

WEEE/RoHS-compliant since:
09/28/2009



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions

Length	6.9 mm
Pitch	3.5 mm
Dimension a	24.5 mm

Pin dimensions	0,8 x 0,8 mm
Hole diameter	1.4 mm

General

Range of articles	MCV 1,5/...-G-THR
Insulating material group	IIIa
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/3)	160 V
Rated voltage (III/2)	160 V
Rated voltage (II/2)	320 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	8 A
Maximum load current	8 A
Insulating material	LCP
Inflammability class according to UL 94	V0
Color	black
Number of positions	8

Certificates / Approvals



Certification


cULus Recognized, GOST

Certifications applied for:


Certification Ex:

Drawings

Drilling plan/solder pad geometry

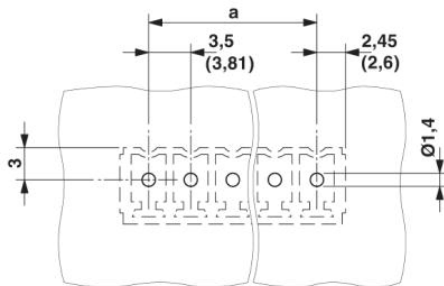


Diagram

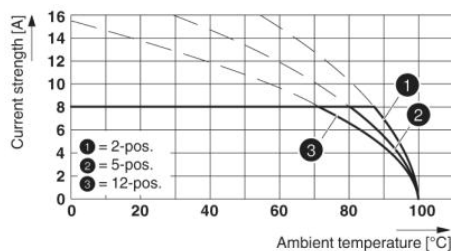

Type: MC 1,5/...-ST(F)-3,5 with MCV 1,5/...-G(F)-3,5 P... THR

Dimensioned drawing

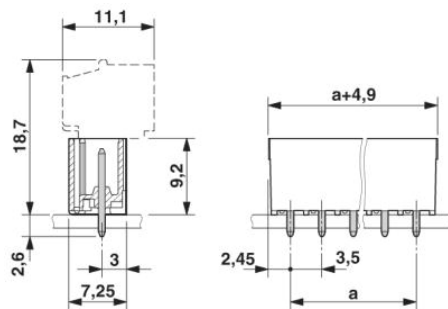

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;