

Base strip - MSTBV 2,5/ 2-GF-5,08 BK - 1800973

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Header, Nominal current: 12 A, Number of positions: 2, Pitch: 5.08 mm, Color: black, Contact surface: Tin, Mounting: Wave soldering



Key Commercial Data

Packing unit	1 STK
Minimum order quantity	50 STK
Weight per Piece (excluding packing)	2.560 g
Custom tariff number	85366990
Country of origin	Germany

Technical data

Environmental Product Compliance

China RoHS	Hazardous substances above threshold values;
	Environmentally Friendly Use Period = 50;
	For details go to tab "Downloads", Category "Manufacturer's declaration"

Dimensions

Pitch	5.08 mm
Dimension a	5.08 mm
Constructional height	12 mm
Length of the solder pin	3.9 mm

General

Range of articles	MSTBV 2,5/...-GF
Rated voltage (III/3)	250 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	12 A
Color	black
Number of positions	2

Standards and Regulations

Connection in acc. with standard	EN-VDE
----------------------------------	--------

Base strip - MSTBV 2,5/ 2-GF-5,08 BK - 1800973


Technical data

Standards and Regulations

	CSA
--	-----

Drawings

Diagram

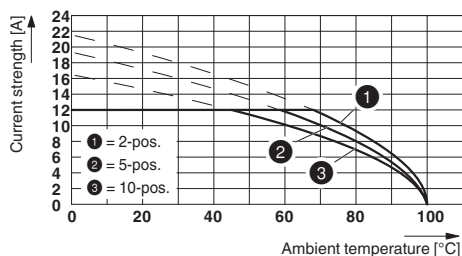

Type: TFKC 2,5/...-STF-5,08 with MSTBV 2,5/...-GF-5,08

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440402
eCl@ss 9.0	27440402

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002637
ETIM 5.0	EC002637

UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

Base strip - MSTBV 2,5/ 2-GF-5,08 BK - 1800973

Approvals

Approvals

Approvals

CSA / VDE Gutachten mit Fertigungsüberwachung / GL / IECCEB Scheme / cULus Recognized / EAC

Ex Approvals

Approval details

CSA  http://www.csagroup.org/us/en/services/testing-and-certification/certified-product-listing 13631		
	B	D
Nominal current I _N	12 A	10 A
Nominal voltage U _N	300 V	300 V

VDE Gutachten mit Fertigungsüberwachung  http://www.vde.de 40004701	
Nominal current I _N	12 A
Nominal voltage U _N	250 V

GL http://www.gl-group.com/newbuilding/approvals/index.html 5032089 HH

IECEE CB Scheme  http://www.iecee.org/ DE1-56062-B1B2	
Nominal current I _N	12 A
Nominal voltage U _N	250 V

cULus Recognized http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm E60425-19931011		
	B	D
Nominal current I _N	12 A	10 A
Nominal voltage U _N	300 V	300 V

Base strip - MSTBV 2,5/ 2-GF-5,08 BK - 1800973

Approvals

EAC B.01742
