

MSTBVA 2,5/ 7-G-5,08 BK

Order No.: 1746839

<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1746839>

Header, Nominal current: 12 A, Number of positions: 7, Pitch: 5.08 mm, Color: black, Contact surface: Tin

Commercial data

EAN	 4 017918 226374
Note	Made-to-order
sales group	E110
Pack	50 Pcs.
Customs tariff	85366990
Gross weight in pieces	0.002818 KG
Net weight per piece	0.00274 KG

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions

Pitch	5.08 mm
Dimension a	30.48 mm

General

Range of articles	MSTBVA 2,5/...-G
Rated voltage (III/3)	250 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	12 A
Color	black
Number of positions	7

Certificates / Approvals



Certification


CSA, cULus Recognized, VDE Gutachten mit
Fertigungsüberwachung, CCA, IEC CB Scheme

Certifications applied for:

Certification Ex:

Drawings

Diagram

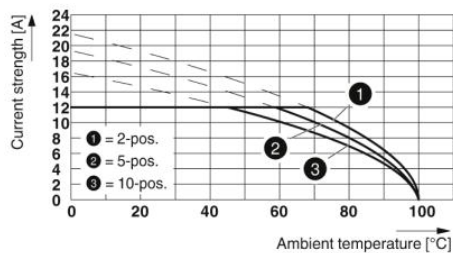

Type: TFKC 2,5/...-ST-5,08 with MSTBVA 2,5/...-G-5,08

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;