

PCVK 4-7,62

Order No.: 1849998

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1849998>

Plug component, Nominal current: 20 A, Nom. voltage: 500 V, Pitch:
7.62 mm, Number of positions: 1, Width: 7.62 mm, Connection type:
Screw connection, Color: green

Commercial data

EAN	4017918110260
Pack	50 pcs.
Customs tariff	85369010
Weight/Piece	0.00615 KG
Catalog page information	Page 375 (CC-2009)

Product notes

WEEE/RoHS-compliant since:
01/01/2003



[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data

General


Color	green
Insulating material	PA
Inflammability class acc. to UL 94	V0

Accessories


Item	Designation	Description
Assembly		
3022218	CLIPFIX 35	Snap-on end bracket, for 35 mm NS 35/7.5 or NS 35/15 DIN rail, can be fitted with Zack strip ZB 8 and ZB 8/27, terminal strip marker KLM 2 and KLM, width: 9.5 mm, color: gray
1401637	E/MBK	End bracket, width: 6.2 mm, color: gray
1401682	NS 15 PERF 2000MM	DIN rail, material: steel, perforated, height 5.5 mm, width 15 mm, length: 2 m
1401695	NS 15 UNPERF 2000MM	DIN rail, material: Steel, unperforated, height 5.5 mm, width 15 mm, length: 2 m
1201756	NS 35/15 AL UNPERF 2000MM	DIN rail, deep-drawn, high profile, unperforated, 1.5 mm thick, material: Aluminum, height 15 mm, width 35 mm, length 2 m
1201895	NS 35/15 CU UNPERF 2000MM	DIN rail, material: Copper, unperforated, 1.5 mm thick, height 15 mm, width 35 mm, length: 2 m
1201730	NS 35/15 PERF 2000MM	DIN rail, material: Steel, perforated, height 15 mm, width 35 mm, length: 2 m
1201798	NS 35/15-2,3 UNPERF 2000MM	DIN rail, material: Steel, unperforated, 2.3 mm thick, height 15 mm, width 35 mm, length: 2 m
General		
1850000	PCVK 4-7,62-F	Plug component, Nominal current: 20 A, Nom. voltage: 500 V, Pitch: 7.62 mm, Number of positions: 1, Width: 7.62 mm, Connection type: Screw connection, Color: green
Marking		
1054233	ZB 7,62,LGS:FORTL.ZAHLEN	Zack strip, 10-section, printed horizontally: with the numbers, 1-10, 11-20 etc. up to 991-1000, color: white
1050509	ZB 7,62:SO/CMS	Zack strip, 10-section, divisible, special printing, marking according to customer requirements
1054000	ZB 7,62:UNBEDRUCKT	Zack strip, unprinted: 10-section, for individual labeling with M-PEN, ZB-T or CMS system, sufficient for 100 terminal blocks, for a terminal width of 7.62 mm, color: White
Plug/Adapter		
1600027	CP-HCC 4	Keying profile for contact inserts, Color: red
Tools		
1205053	SZS 0,6X3,5	Screwdriver, bladed, matches all screw terminal blocks up to 4.0 mm ² connection cross section, blade: 0.6 x 3.5 mm, without VDE approval

Drawings

Diagram

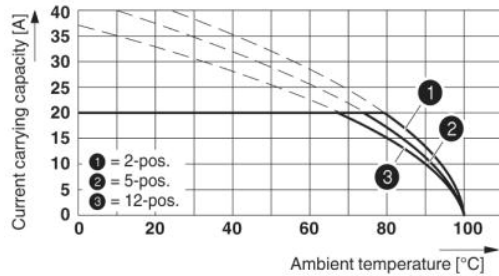

Dimensioned drawing

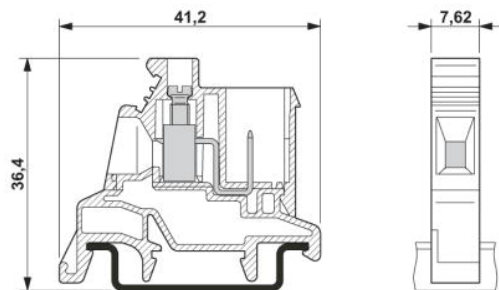

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact
Technical modifications reserved;