




Switchable Terminal Blocks URK-ND

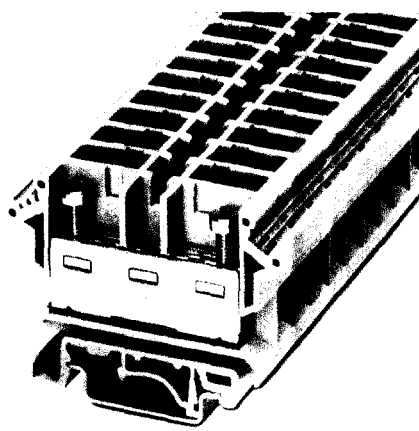


URK-ND

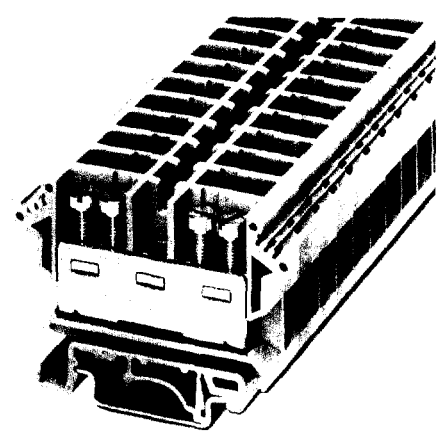

URK-ND 2

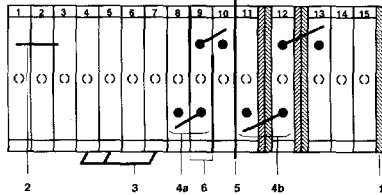

URK-ND

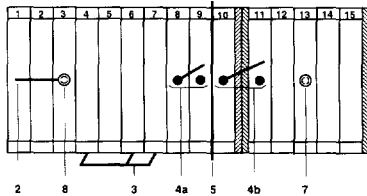

URK-ND 2

Terminal width 10.2

(IEC) [mm ²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
IEC 947-7-1	0.5-16	0.5-10	20-6	76	800


Terminal width 10.2

(IEC) [mm ²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
IEC 947-7-1	0.5-16	0.5-10	20-6	76	800

Description

Terminal block, with universal foot for mounting on  or 

(1) End cover




(2) **Fixed bridge**, for cross connections in the terminal center, screw heads with insulating collar, 10-position, divisible, with 10 screws



(3) **Insertion bridge**, fully insulated, 2-pos. fully insulated, 3-pos. divisible, insulated spine, 10-position



(4) **Switch bar for 2 terminal blocks**, complete, short link, long link: 2 end covers inbetween



(5) **Separating plate**, for visual and electrical separation of terminal groups, 0.8 mm thick



(6) **Partition plate**, with cut-out permits link to swing round with SB 2-10/15, reversible, 0.8 mm thick



(7) **Test plug socket**, for test connection with test plug PS or short-circuit plug KSS-10



(8) **Test plug socket**, insulated, only used with FBI, for test connection with test plug PS



(9) **Zack strip**, 10-section, white

(10) Screwdriver

Dimensions

Width / length / end cover width	[mm]	10.2 / 64 / 2.5
Height (NS 35:7.5 / NS 35:15 / NS 32)	[mm]	43.5 / 51 / 48.5

Technical data in accordance with IEC/ DIN VDE

Maximum load current / cross section	[A] / [mm ²]	76 / 16
Max. cross section with insertion bridge (solid / stranded)	[mm ²]	10 / 10
Rated surge voltage / contamination class	[kV] / -	8 / 3
Surge voltage category / insulation material group	- / -	III / I

Connection capacity

stranded with ferrule without / with plastic sleeve	[mm ²]	0.5 - 10 / 0.5 - 6
---	--------------------	--------------------

Multiple connection (2 conductors with same cross section)

solid / stranded	[mm ²]	0.5 - 4 / 0.5 - 4
stranded with ferrule without plastic sleeve	[mm ²]	0.5 - 2.5
stranded with TWIN ferrule with plastic sleeve	[mm ²]	0.5 - 6
Stripping length	[mm]	15

Internal cylindrical gage (IEC 947-1:1988)

Thread		A 5
Torque	[Nm]	M 4
Insulation material		1.5 - 1.8
Inflammability class acc. to UL 94		PA
Temperature indices RTI / Ti		V2
Approval data (CSA)		125 / 100

Temperature indices RTI / Ti

Approval data (CSA)

nom. voltage / nom. current / conduc. sizes CSA: [V] / [A] / AWG

1) Fit STS-URK-ND separating plate between terminal blocks when employing the short link.

Type

URK-ND

Order No.

07 01 08 2

Pcs.
Pkt.

50

D-URK-ND

07 01 12 1

50

FBI 10-10

I_{max}: 82 A

02 03 27 6

10

EB 2-10

I_{max}: 57 A

02 03 15 3

100

EB 3-10

I_{max}: 57 A

02 03 32 8

10

EB 10-10

I_{max}: 57 A

02 03 13 7

10

SB 2-10/15¹⁾

I_{max}: 57 A

02 03 23 4

1

TS-URK-ND

07 01 10 5

50

STS-URK-ND

07 01 11 8

50

PSB 4/7/6

03 03 29 9

100

PSBJ 4/15/6:...

(order data, see page 316)

ZB 10 (order data, see page 263)

12 05 06 6

10

SZS 1,0 x 4,0

12 05 06 6

10



Type

URK-ND 2

Order No.

07 01 09 5

Pcs.
Pkt.

50

D-URK-ND

07 01 12 1

50

FBI 10-10

I_{max}: 82 A

02 03 27 6

10

EB 2-10

I_{max}: 57 A

02 03 15 3

100

EB 3-10

I_{max}: 57 A

02 03 32 8

10

EB 10-10

I_{max}: 57 A

02 03 13 7

10

SB 2-10/15

I_{max}: 57 A

02 03 23 4

1

TS-URK-ND

07 01 10 5

50

PSB 4/7/6

03 03 29 9

100

PSBJ 4/15/6:...

(order data, see page 316)

ZB 10 (order data, see page 263)

12 05 06 6

10

SZS 1,0 x 4,0

12 05 06 6

10

10.2 / 64 / 2.5

43.5 / 51 / 48.5

76 / 16

10 / 10

8 / 3

III / I

0.5 - 10 / 0.5 - 6

0.5 - 4 / 0.5 - 4

0.5 - 2.5

0.5 - 6

15

A 5

M 4

1.5 - 1.8

PA

V0

130 / 120

600 / 65 / 18 - 6