

SMKDS 2,5/ 5-5,08 RD - 1010041

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




PCB terminal block, nom. voltage: 400 V, pitch: 5.08 mm, number of positions: 5, connection method: Screw connection with tension sleeve, mounting: Wave soldering, color: red

The figure shows a 3-position version

Your advantages

- ✓ Well-known connection principle allows worldwide use
- ✓ Low temperature rise, thanks to maximum contact force
- ✓ Allows connection of two conductors
- ✓ Angled connection enables multi-row arrangement on the PCB
- ✓ Integrated protective guide prevents incorrect insertion of the conductor underneath the tension sleeve
- ✓ The latching on the side enables various numbers of positions to be combined

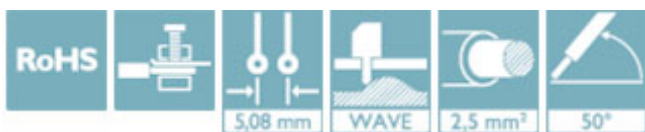

Key Commercial Data

Packing unit	1
GTIN	 4 055626 481586
GTIN	4055626481586
Custom tariff number	85369010

Technical data

Dimensions

Length [l]	14.25 mm
Pitch	5.08 mm
Dimension a	20.32 mm
Width [w]	25.4 mm
Height	19.4 mm
Height [h]	22.9 mm
Solder pin [P]	3.5 mm
Hole diameter	1.4 mm

SMKDS 2,5/ 5-5,08 RD - 1010041

Technical data

General

Range of articles	SMKDS 2,5
Nominal cross section	2.5 mm ²
Number of positions	5

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Classifications

eCl@ss

eCl@ss 5.1	27261100
eCl@ss 6.0	27261100
eCl@ss 7.0	27440401
eCl@ss 9.0	27440401

ETIM

ETIM 5.0	EC002643
ETIM 6.0	EC002643