

## Marker card - SK 2,8 REEL P3,81 WH CUS - 0825122

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Marker card, can be ordered: By card, white, labeled according to customer specifications, Mounting type: Adhesive, for terminal block width: 3.81 mm, Lettering field: continuous x 2.8 mm

The figure shows a version of the article

### Why buy this product

- ✓ The markers supplied in card format can be easily labeled using standard laser printers
- ✓ Ideal for labeling COMBICON connectors
- ✓ Labeling service: Phoenix Contact can custom-label SK markers according to your requirements
- ✓ The SK labeling range offers self-adhesive marker strips for labeling products that do not have a marker groove
- ✓ The markers that are supplied in roll format can be labeled quickly and cost-effectively using THERMOMARK printers
- ✓ The SK labeling range offers self-adhesive marker strips for labeling products that do not have a marker groove



### Key Commercial Data

|                                      |                                                                                                         |
|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit                         | 1 STK                                                                                                   |
| GTIN                                 | <br>4 046356 355056 |
| GTIN                                 | 4046356355056                                                                                           |
| Weight per Piece (excluding packing) | 0.430 g                                                                                                 |
| Custom tariff number                 | 49119900                                                                                                |
| Country of origin                    | Germany                                                                                                 |
| Note                                 | Made to Order (non-returnable)                                                                          |

### Technical data

#### Dimensions

|           |        |
|-----------|--------|
| Width (a) | 2.8 mm |
|-----------|--------|

#### Ambient conditions

|                                 |                   |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 150 °C |
| Ambient temperature (assembly)  | > 15 °C           |

# Marker card - SK 2,8 REEL P3,81 WH CUS - 0825122

## Technical data

### Ambient conditions

|                                |                                                                                                      |
|--------------------------------|------------------------------------------------------------------------------------------------------|
| Recommended storage conditions | 23 °C / 50% relative humidity. Storage in the original packaging is recommended prior to processing. |
|--------------------------------|------------------------------------------------------------------------------------------------------|

### General

|                                                                     |                                     |
|---------------------------------------------------------------------|-------------------------------------|
| Note                                                                | Marking up to max. 25-pos.          |
| Color                                                               | white                               |
| Components                                                          | free from silicone and halogen      |
| Material                                                            | Polyester                           |
| Wipe resistance                                                     | DIN EN 61010-1 (VDE 0411-1)         |
| Number of marker strips                                             | 14                                  |
| Adhesive                                                            | Acrylic                             |
| Printability                                                        | Thermal transfer                    |
| Device                                                              | 5146477 THERMOMARK ROLL             |
|                                                                     | 5146231 THERMOMARK X1.2             |
| Ink ribbon                                                          | 5145384 THERMOMARK-RIBBON 110       |
| Test for substances that would hinder coating with paint or varnish | VW PV 3.10.7:2005-02                |
| Result                                                              | Test passed                         |
| Test specification weathering-resistance                            | Following ISO 4892-2:2013-03        |
| Test duration                                                       | 96 h                                |
| Wipe resistance test result                                         | Test passed                         |
| Salt spray test specification                                       | DIN EN 60068-2-11:2000-02           |
| Test duration                                                       | 96 h                                |
| Salt spray testing result                                           | Test passed                         |
| Alternating condensation climate with SO2 test specification        | DIN 50018:2013-05                   |
| Climate level                                                       | AHT 1.0 S                           |
| Cycles                                                              | 2                                   |
| Condensation test result                                            | Test passed                         |
| Wipe resistance of test specification inscriptions                  | DIN EN 61010-1 (VDE 0411-1):2011-07 |
| Result                                                              | Test passed                         |
| Foil strength                                                       | 53 µm                               |
| Adhesive strength                                                   | 20 µm                               |
| Marking mounting type                                               | Adhesive                            |


### Standards and Regulations

|                 |                             |
|-----------------|-----------------------------|
| Wipe resistance | DIN EN 61010-1 (VDE 0411-1) |
|-----------------|-----------------------------|

## Drawings

## Marker card - SK 2,8 REEL P3,81 WH CUS - 0825122

Schematic diagram

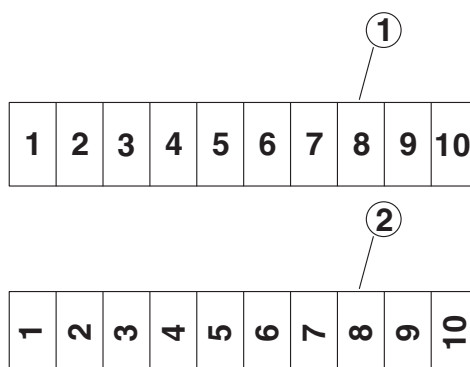

- ① Horizontal
- ② Vertical

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 24190219 |
| eCl@ss 4.1 | 24190219 |
| eCl@ss 5.0 | 27141137 |
| eCl@ss 5.1 | 27141137 |
| eCl@ss 6.0 | 27141137 |
| eCl@ss 7.0 | 27141137 |
| eCl@ss 8.0 | 27141137 |
| eCl@ss 9.0 | 27141137 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC000761 |
| ETIM 4.0 | EC000761 |
| ETIM 5.0 | EC000761 |
| ETIM 6.0 | EC000761 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211811 |
| UNSPSC 7.0901 | 39121410 |
| UNSPSC 11     | 39121410 |
| UNSPSC 12.01  | 39121410 |
| UNSPSC 13.2   | 39131505 |