




SPECIFICATION CONTROL DRAWING Crystal Resonator

FREQUENCY
12.582900MHz

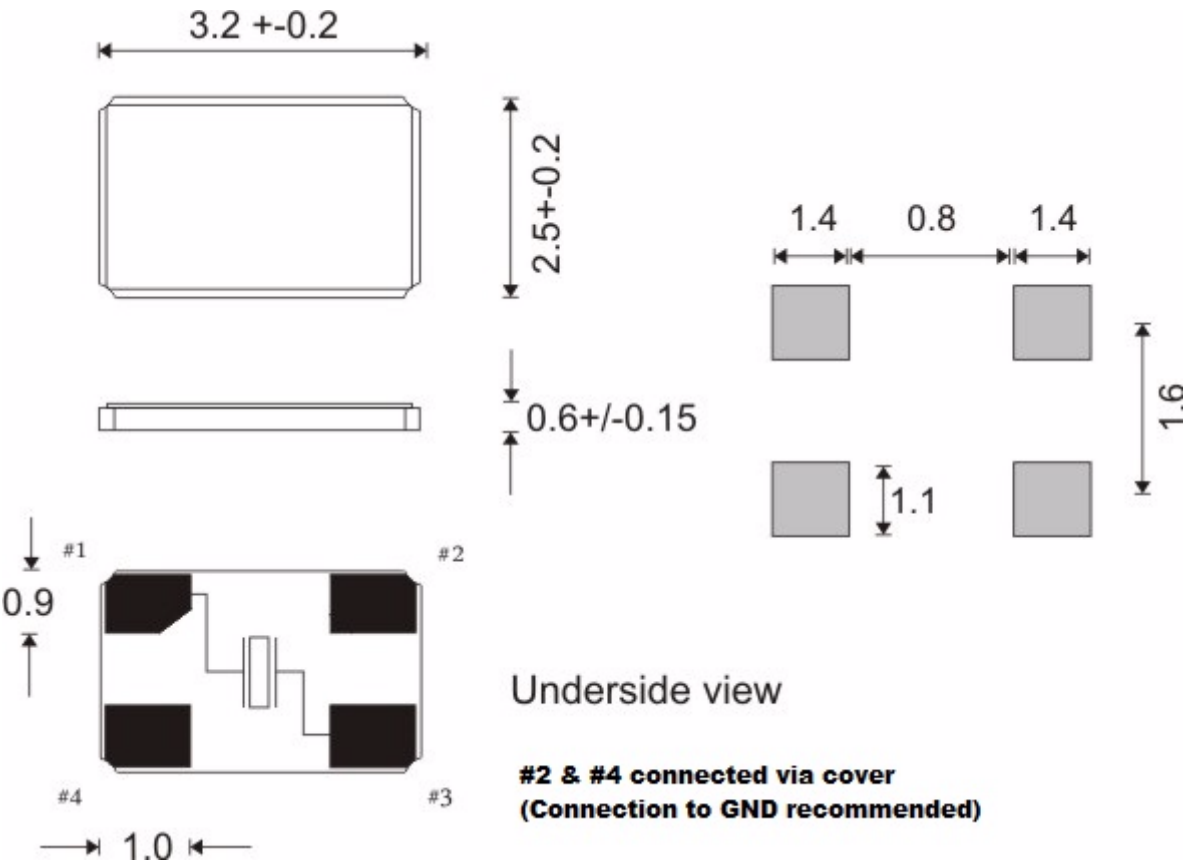

Holder Style	3X25X06 4-Pad
Mode	Fundamental
Adjustment Tolerance	$\pm$ 10PPM at 25°C
Temperature Stability	$\pm$ 10 PPM
Operating Temp. Range	-10°C to +60°C
Load Capacitance	16 pF
ESR	60 Max Ohm
Static Capacitance (C0)	Max 7.0 pF
Ageing	+/-2ppm Max first year
Marking	AEL125 WW/YY

Amdt Date	Change Note	AEL Code
17 MAR 10	Marking Updated	X12M582900S001
		Issue Ref B